

STATE OF KUWAIT

DIRECTORATE GENERAL OF CIVIL AVIATION

AVIATION SAFETY

2025/10/2



دولة الكويت

الإدارة العامة للطيران المدني

سلامة الطيران

2025/282/SUPDT-R/41

All KCASR Stakeholders and Users

Sub.: Regulatory Circular No. 2025-23.

Revision Number 4 to Kuwait Civil Aviation Safety Regulations - KCASR 14 - AERODROMES Volume II - Aerodromes Heliports.

Dear Sir,

Please find enclosed herewith the regulatory circular No. 2025-23 regarding the issuance of KCASR 14 - AERODROMES Volume II - Aerodromes Heliports Rev. 4. This is for your information and distribution to all concerned departments.

Up to date KCASR Parts are published on the DGCA/ASD website (<https://kcasr.dgca.gov.kw>).

If required, the DGCA/Aviation Safety Department personnel are available to answer your questions on the interpretation and intended implementation of the proposed amendments.

KCASR 14 - AERODROMES Volume II - Aerodromes Heliports Rev. 4 will be in effect from 26/Oct/2025.

Yours Sincerely,

President of Civil Aviation.

Eng. Duaj Khalaf Alotaibi
Acting Director General DGCA

CC: Director General of Civil Aviation.
Dy. Dir. Gen. Kuwait. Intel. Airport Affairs.
Dy. Dir. Gen. for Air Navigation Services Affairs.
Safety Management Coordination Center (SMCC).
Head of Technical Office.
Civil Aviation Security Department.
Aviation Safety Director.
Air Transport Director.
Inspection & oversight Superintendent.
Head of Standards & Aviation Safety Regulations Division.



Rev 9



Web site: www.dgca.gov.com.kw , E-mail: info@dgca.gov.kw

+965 24713504 - فاكس: +965 161 - الرد الآلي: +965 24336699 - ص.ب. 17 : الصفاة - الرمز البريدي 13001 دولة الكويت - البدالة
P. O. BOX 17 Safat - P. Code 13001 - State of Kuwait - Operator +965-24336699 - IVR +965-161 - Fax +965-24713504

HRA EM
17.9

STATE OF KUWAIT

DIRECTORATE GENERAL OF CIVIL AVIATION
AVIATION SAFETY



دولة الكويت
الإدارة العامة للطيران المدني
سلامة الطيران

2025/10/2

2025/283/SUPDT-R/41

REGULATORY CIRCULAR (NO. 2025-23)

Subject:

Notice of Amendment to Kuwait Civil Aviation Safety Regulations KCASR (issue 4).

Purpose:

The purpose of this Regulatory Circular No. **2025-23** is to Amend KCASR 14 - AERODROMES Volume II - Aerodromes Heliports (issue 4) to comply with DGCA requirements.

This Regulatory Circular No. **2025-23** is based on (NPA) No. 2025-20 dated 01/Sep/2025

Revisions:

This amendment will be included in the revision (4) of KCASR 14 - AERODROMES Volume II - Aerodromes Heliports.

Regulatory Requirements:

This amendment shall apply to the following Organizations approved by the Directorate General of Civil Aviation (DGCA) or authorised to operate within the State of Kuwait:

1. Airport Operators;
2. Air Navigation Service Providers;
3. Air Operator Certificate (AOC);
4. Approved Maintenance Organizations (AMO) Holders;
5. Ground Handling Service Providers;
6. Training Organizations;
7. All users of KCASRs.

Effective Date:

This new revision will be in effect from **26/Oct/2025**.

Required Action:

All users of KCASR must comply with the provisions of this amendment from the effective date.

For

President of Civil Aviation

Eng. Duaij Khalaf Alotaibi
Acting Director General DGCA



Rev. 07



Web site: www.dgca.gov.kw , E-mail: info@dgca.gov.kw

ص.ب. 17 : الصفاة - الرمز البريدي 13001 دولة الكويت - البدالة +965 24336699 - الرد الآلي: +965 161 - فاكس: +965 24713504

P. O. BOX 17 Safat - P. Code 13001 - State of Kuwait - Operator +965-24336699 - IVR +965-161 - Fax +965-24713504



الطيران المدني
Civil Aviation
دولة الكويت - State of Kuwait

Kuwait Civil Aviation Safety Regulations

KCASR 14 – AERODROMES

Volume II – Aerodromes Heliports

Table of Contents

Table of Contents	2
Control of this Document	7
Reference Documents	9
Chapter	1.
I	Genera
	10
1.1 Definitions	10
1.2 Applicability	13
1.3 Purpose	13
1.5 ICAO Annex 14 compliance	14
1.6 Exemptions	15
Common reference systems	16
Chapter 2.	Heliport
data	17
2.1 Aeronautical data	17
2.2. Heliport reference point	17
2.3. Heliport elevations.....	17
2.4. Heliport dimensions and related information	17
2.5. Declared distances.....	18
Chapter 3.	Physical
Characteristics	21
3.1. Onshore heliports	21
3.2. Helidecks.....	37
3.3. Shipboard heliports	38
Chapter 4.	Obstacle
Environment	41
4.1. Obstacle limitation surfaces and sectors.....	41
4.2. Obstacle Limitation Requirements	47
Chapter 5.	Visual
Aids	61
5.1 Indicators	61
5.2. Markings and markers	63
5.3. Lights	84
6 Heliport Emergency Response	97
6.1 Heliport Emergency Planning	97
Appendix 1AERONAUTICAL DATA QUALITY REQUIREMENTS	105
Appendix 2. International SARP	108

Appendix 3 Guidance for Unlicensed Helipads	117
Appendix 3 Cross Reference	120
Appendix 4 – Procedures for Helipad Certification	121

Amendment Record

[illegible]

<i>Kuwait Civil Aviation Safety Regulations</i>			<i>KCASR 14 – Aerodromes</i>
			<i>Volume II – Aerodromes Heliports</i>



Abbreviations and Symbols

Abbreviations

AIP	Aeronautical Information Publication
APAPI	Abbreviated precision approach path indicator
ASPSL	Arrays of segmented point source lighting
Cd	Candela
Cm	Centimetre
DIFFS	Deck integrated firefighting system
FAS	Fixed application system
FATO	Final approach and take-off area
FFAS	Fixed foam application system
FMS	Fixed monitor system
Ft	Foot
GNSS	Global navigation satellite system
HAPI	Helicopter approach path indicator
HFM	Helicopter flight manual (also known as RFM)
Hz	Hertz
IDF	Initial departure fix
Kg	Kilogram
km/h	Kilometre per hour
kt	Knot
L	Litre
Lb	Pounds
LDAH	Landing distance available
L/min	Litre per minute
LOA	Limited obstacle area
LOS	Limited obstacle sector
LP	Luminescent panel
M	Metre
MAPt	Missed approach point
MTOM	Maximum take-off mass
NVIS	Night Vision Imaging Systems (NVIS)
OCS	Obstacle clearance surface
OFS	Obstacle-free sector
OLS	Obstacle limitation surface
PAPI	Precision approach path indicator
PFAS	Portable foam application system
PinS	Point-in-space
PRP	Point-in-space reference point
RFF	Rescue and firefighting
RFFS	Rescue and firefighting service
RFM	Rotorcraft flight manual (also known as HFM)
R/T	Radiotelephony or radio communications
RTODAH	Rejected take-off distance available
S	Second
T	Tonne (1 000 kg)
TLOF	Touchdown and lift-off area
TODAH	Take-off distance available
UCW	Undercarriage width
VSS	Visual segment surface

Symbols

°	Degree
=	Equals
%	Percentage
□	Plus or minus

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Control of this Document

DC.1 Introduction

DC.1.1 Pursuant to Law No (30) of the year 1960 and subsequent Ministerial Decisions No (3) of the year 1986, No (18) of the year 1990, and No (3) of the year 1996, based upon that Law, the President of the Kuwait Directorate General of Civil Aviation is empowered to adopt and amend Kuwait Civil Aviation Safety Regulations. In accordance herewith, the following Regulation is hereby established for compliance by all persons concerned. This regulation shall be known as KCASR 14, Volume II – Aerodrome - Heliports and any reference to this title shall mean referring to these regulations governing the basic requirements to be met for civil aviation in the State of Kuwait.

DC.2 Authority for this Requirement

DC.2.1 This KCASR 14, Volume II – Aerodrome - Heliports is issued on the authority of the President of the Kuwait Directorate General of Civil Aviation.

DC.3 Applicability

DC.3.1 This KCASR 14, Volume II – Aerodrome - Heliports is applicable to the aviation industry of State of Kuwait.

DC.4 Scope

DC.4.1 KCASR 14, Volume II – Aerodromes - Heliports contains the basic regulations to be met for civil aviation in State of Kuwait, and shows compliance with ICAO Annexes. The regulations are separated into the following civil aviation safety regulations with cross references where applicable.

KCASR 0 – Basic Regulation

KCASR 1 – Personnel Licensing

KCASR 2 – Rules of the Air

KCASR 3 – Meteorological Service for International Air Navigation

KCASR 4 – Aeronautical Charts

KCASR 5 – Units of Measurement

KCASR 6 – Operation of Aircraft

KCASR 7 – Aircraft Registration and Cancellation

KCASR 8 – Airworthiness of Aircraft and Continuous Airworthiness

KCASR 9 – Facilitation

KCASR 10 – Aeronautical Telecommunications

KCASR 11 – Air Traffic Services

KCASR 12 – Search and Rescue

KCASR 13 – Aircraft Accident and Incident Investigation

KCASR 14 – Volume I - Aerodromes

KCASR 14 – Volume II – Aerodromes – Heliports

Issue 4	Revision 4	Oct. 2025	Page 7 of 121
---------	------------	-----------	---------------

<i>Kuwait Civil Aviation Safety Regulations</i>		<i>KCASR 14 – Aerodromes</i>
		<i>Volume II – Aerodromes Heliports</i>

KCASR 14 – Volume III – Ground Handling Operations (GHO)

KCASR 15 – Aeronautical Information Services

KCASR 16 – Environmental Protection

KCASR 18 – Dangerous Goods

KCASR 17 – Aviation Security

KCASR 19 – Safety Management

KCASR 22 – Unmanned Aircraft Systems

KCASR 23 – Light Sport Aircraft

KCASR 25 – Special Aviation Regulations

KCASR 26 – Enforcement and Sanctions

KCASR 27 – Charges and Fees

DC.5 Definitions

DC.5.1 Terms not defined within this document shall have the meaning given to them in the relevant legal instruments or international legal instruments in which they appear, especially as they appear in the Convention and its Annexes.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Reference Documents

The reference documents listed below are applicable to both KCASR 14 Volumes I and II.

ICAO Annex 14, Aerodromes - Volume I, Aerodrome design and operation;

ICAO Annex 14, Aerodromes – Volume II, Aerodromes, Heliports;

ICAO Annexes (relevant parts) 2, 3, 4, 6, 10, 11, 14, 15, 16, 17 and 19;

ICAO Doc 4444, Procedures for Air Navigation Services - Air Traffic Management (PANS-ATM);

ICAO Doc 8071, Manual on Testing of Radio Navigation Aids;

ICAO Doc 8126, Aeronautical Information Services Manual;

ICAO Doc 8168, Procedures for Air Navigation Services - Aircraft Operations Volumes I and II (PANS-OPS);

ICAO Doc 8643, Aircraft Type Designators;

ICAO Doc 9137, Airport Services Manual, Parts 1 to 9;

ICAO Doc 9150, Stolport Manual;

ICAO Doc 9157, Aerodrome Design Manual, Part 1 to 6;

ICAO Doc 9184, Airport Planning Manual, Parts 1 to 3;

ICAO Doc 9261, Heliport Manual;

ICAO Doc 9332, Manual on the ICAO Bird Strike Information System (IBIS);

ICAO Doc 9365, Manual of All-Weather Operations;

ICAO Doc 9426, Air Traffic Services Planning Manual;

ICAO Doc 9476, Manual of Surface Movement Guidance and Control Systems (SMGCS);

ICAO Doc 9640, Manual of Aircraft Ground De-icing/Anti-icing Operations;

ICAO Doc 9643, Manual on Simultaneous Operations on Parallel or near-Parallel Instrument Runways;

ICAO Doc 9674, World Geodetic System — 1984 (WGS-84) Manual;

ICAO Doc 9683, Human Factors Training Manual;

ICAO Doc 9734, Establishment and Management of a State's Safety Oversight System;

ICAO Doc 9760, Airworthiness Manual, Volumes I and II;

ICAO Doc 9774, Manual on Certification of Aerodromes;

ICAO Doc 9815, Manual on Laser Emitters and Flight Safety;

ICAO Doc 9829, Guidance on the Balanced Approach to Aircraft Noise Management;

ICAO Doc 9830, Advanced Surface Movement Guidance and Control Systems (A-SMGCS) Manual;

ICAO Doc 9859, Safety Management Manual (SMM);

ICAO Doc 9870, Manual on the Prevention of Runway Incursions;

ICAO Doc 9981 Procedures for Air Navigation Services — Aerodromes (PANS-Aerodromes);

ICAO Circular 305 AN/177 Operation of New Larger Aeroplanes at Existing Aerodromes, June 2004

ICAO Circular 329 AN/191 Assessment, Measurement and Reporting of Runway Surface Condition, 2012

European Action Plan for the Prevention of Runway Incursions (EAPPRI);



Chapter 1. General

Note 1.— KCASR 14, Volume II, contains Standards and Recommended Practices (specifications) that prescribe the physical characteristics and obstacle limitation surfaces to be provided for at heliports, and certain facilities and technical services normally provided at a heliport. It is not intended that these specifications limit or regulate the operation of an aircraft.

Note 2.— When designing a heliport, a design helicopter, which represents the largest dimensions; the greatest maximum take-off mass (MTOM); and the most critical obstacle avoidance criteria of the population of helicopters the heliport is intended to serve, is taken into account. For guidance on establishing a design helicopter see the Heliport Manual (Doc 9261).

1.1 Definitions

Part 14, Volume I, contains definitions for the terms which are used in both volumes. Those definitions are not reproduced in this volume, with the exception of the following two, which are included for ease of reference.

The following list contains definitions of terms that are used only in Volume II, with the meanings given below.

Aeronautical Study: A study of an aeronautical problem to identify possible solutions and select a solution that is acceptable to the Kuwait DGCA without degrading safety.

Alternative Means of Compliance: Alternative means of compliance are those that propose an alternative to an existing Acceptable Means of Compliance (AMC) or those that propose new means to establish compliance with the KCASR for which no associated AMC have been adopted by the Kuwait DGCA.

Apron: A defined area, on a land aerodrome, intended to accommodate aircraft for purposes of loading or unloading passengers, mail or cargo, fuelling, parking or maintenance, including any apron taxiways and aircraft stand taxi lanes.

Apron Management Service: A service provided to regulate the activities and the movement of aircraft and vehicles on an apron.

Ascent/Descent surface. An inclined plane or complex surface that slopes upward from the centre of the FATO to indicate the path helicopters are expected to follow when vertical procedures are utilized – it can consist of:

- a) an inverted triangle when there is no lateral component; or
- b) an inverted conical surface when there is a lateral component.

D: The largest overall dimension of the helicopter when rotor(s) are turning measured from the most forward position of the main rotor tip path plane to the most rearward position of the tail rotor tip path plane or helicopter structure.

Design D. The D of the design helicopter.

D-value. A limiting dimension, in terms of “D”, for a heliport, helideck or shipboard heliport, or for a defined area within.

Declared Distances:

- (a) Take-off distance available (TODAH): The length of the FATO plus the length of helicopter clearway (if provided) declared available and suitable for helicopters to complete the take-off.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

- (b) Rejected take-off distance available (RTODAH): The length of the FATO declared available and suitable for helicopters operated in performance class 1 to complete a rejected take-off.
- (c) Landing distance available (LDAH): The length of the FATO plus any additional area declared available and suitable for helicopters to complete the landing manoeuvre from a defined height.

Dynamic load bearing surface: A surface capable of supporting the loads generated by a helicopter in motion.

Elevated heliport: A heliport located on a raised structure on land.

Elongated. When used with TLOF or FATO, elongated means an area which has a length more than twice its width.

Final approach and take-off area (FATO): A defined area over which the final phase of the approach manoeuvre to hover or landing is completed and from which the take-off manoeuvre is commenced. Where the FATO is to be used by helicopters operated in performance class 1, the defined area includes the rejected take-off area available.

Helicopter air taxiway: A defined path on the surface established for the air taxiing of helicopters.

Helicopter clearway: A defined area on the ground or water, selected and/or prepared as a suitable area over which a helicopter operated in performance class 1 may accelerate and achieve a specific height.

Helicopter ground taxiway: A ground taxiway intended for the ground movement of wheeled undercarriage helicopters.

Helicopter stand: A defined area intended to accommodate a helicopter for purposes of: loading or unloading passengers, mail or cargo; fuelling, parking or maintenance; and, where air taxiing operations are contemplated, the TLOF.

Helicopter taxiway: A defined path on a heliport intended for the ground movement of helicopters and that may be combined with an air taxi-route to permit both ground and air taxiing.

Helicopter taxi-route. A defined path established for the movement of helicopters from one part of a heliport to another.

- a) *An air taxi-route.* A marked taxi-route intended for air taxiing.
- b) *A ground taxi-route.* A taxi-route centred on a taxiway.

Helideck: A heliport located on a fixed or floating offshore facility such as an exploration and/or production unit used for the exploitation of oil or gas.

Heliport: An aerodrome or a defined area on a structure intended to be used wholly or in part for the arrival, departure and surface movement of helicopters.

Heliport elevation: The elevation of the highest point of the FATO.

Heliport reference point (HRP): The designated location of a heliport.

Initial departure fix (IDF). The terminal fix for the visual segment and the fix where the instrument phase of the PinS departure begins.

Landing Area: That part of a movement area intended for the landing or take-off of aircraft.

Obstacle: All fixed (whether temporary or permanent) and mobile objects, or parts thereof, that:

- (a) are located on an area intended for the surface movement of aircraft; or

Issue 4	Revision 4	Oct. 2025	Page 11 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

- (b) extend above a defined surface intended to protect aircraft in flight; or
- (c) stand outside those defined surfaces and that have been assessed as being a hazard to air navigation.

Initial departure fix (IDF). The terminal fix for the visual segment and the fix where the instrument phase of the PinS departure begins.

Point-in-space approach (PinS): An approach procedure designed for helicopters only that includes both a visual and an instrument segment..

Point-in-space (PinS) departure. A departure procedure designed for helicopters only that includes both a visual and an instrument segment.

Point-in-space (PinS) reference point (PRP). Reference point for the point-in-space approach as identified by the latitude and longitude of the MAPt.

Point-in-space (PinS) visual segment: The segment of a helicopter PinS procedure between a point (MAPt or IDF) and heliport.

Note — *The design criteria for PinS procedures are established in ICAO Procedures for Air Navigation Services — Aircraft Operations, Volume II (PANS-OPS, Doc 8168- Volume II).*

Protection area: A defined area surrounding a stand intended to reduce the risk of damage from helicopters accidentally diverging from the stand.

Rejected take-off area: A defined area on a heliport suitable for helicopters operating in performance class 1 to complete a rejected take-off.

Runway-type FATO: A FATO having characteristics similar in shape to a runway.

Safety area: A defined area on a heliport surrounding the FATO which is free of obstacles, other than those required for air navigation purposes, and intended to reduce the risk of damage to helicopters accidentally diverging from the FATO.

Safety Management System (SMS): A system for the management of safety at aerodromes including the organizational structure, responsibilities, procedures, processes and provisions for the implementation of aerodrome safety policies by an aerodrome operator, which provides for the control of safety at, and the safe use of, the aerodrome.

Shipboard heliport: A heliport located on a ship that may be purpose or non-purpose-built. A purpose-built shipboard heliport is one designed specifically for helicopter operations. A non-purpose-built shipboard heliport is one that utilizes an area of the ship that is capable of supporting a helicopter but not designed specifically for that task.

State Safety Programme (SSP): An integrated set of requirements and activities for the management of aviation safety by the State.

Static load-bearing surface: A surface capable of supporting the mass of a helicopter situated upon it.

Surface-level heliport: A heliport located on the ground or on a structure on the surface of the water.

Touchdown and lift-off area (TLOF): An area on which a helicopter may touchdown or lift off.

Touchdown positioning circle (TDPC). A touchdown positioning marking (TDPM) in the form of a circle used for omnidirectional positioning in a TLOF.

Touchdown positioning marking (TDPM). A marking or set of markings providing visual cues for the positioning of helicopters.

Issue 4	Revision 4	Oct. 2025	Page 12 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Vertical procedures. Take-off and landing procedures that include an initial vertical or steep climb and a final vertical or steep descent profile. The profile may or may not include a lateral component.

Winching area: An area provided for the transfer by helicopter of personnel or stores to or from a ship.

1.2 Applicability

Note.— The dimensions discussed in this KCASR are based on consideration of single-main-rotor helicopters. For tandem-rotor helicopters the heliport design will be based on a case-by-case review of the specific models using the basic requirement for a safety area and protection areas specified in this KCASR. The specifications of the main chapters of this KCASR are applicable for visual heliports that may or may not incorporate the use of a Point-in-space approach or departure. Additional specifications for instrument heliports with non-precision and/or precision approaches and instrument departures are detailed in the Appendix. The specifications of this KCASR are not applicable for water heliports (touchdown or lift-off on the surface of the water).

- 1.2.1. KCASR 14, Volume II – Aerodrome - Heliports applies to all aerodromes/heliports that are certificated within State of Kuwait. Any aerodrome/heliport within State of Kuwait may apply for Certification under these requirements.
- 1.2.2. These regulations represent the minimum requirements to achieve an acceptable level of safety performance.

1.3 Purpose

- 1.3.1. This KCASR Part 14 Volume II provides regulations that are primarily based upon the Standards and Recommended Practices (SARPs) of ICAO Annex 14 Volume II, Heliports, as well as those of ICAO Annex 15 and other related ICAO documents.
- 1.3.2. The issue of a certificate, licence or approval indicates only that the holder is considered competent to secure the safe operation of a Heliport. The possession of such a certificate, licence or approval does not relieve the heliport operator from the responsibility for compliance with KCASR 14, Volume II – Aerodrome - Heliports and any other legislation in force. Neither does it relieve the Heliport operator of its responsibility for oversight of any service provider contracted to meet the requirements imposed upon service providers.
- 1.3.3. In addition, KCASR 14, Volume II – Aerodrome - Heliports includes material and specifications to support the safety oversight activities by the Kuwait DGCA and to provide guidance to heliport operators on the physical characteristics of a heliport or helideck, the operational requirements and the infrastructure that is required to be provided. Where appropriate, reference is made to other documents in support of KCASR 14, Volume II – Aerodrome - Heliports. This material can be used to establish minimum acceptable standards or Acceptable Means of Compliance (AMC) under the discretion of the Kuwait DGCA.

1.4 Certification of heliports (Applicable as of 26 November 2026)

Note.— The intent of these specifications is to ensure the establishment of a regulatory regime so that compliance with the specifications in this Annex can be effectively enforced. It is recognized

Issue 4	Revision 4	Oct. 2025	Page 13 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

that the methods of ownership, operation and surveillance of heliports differ among States. The most effective and transparent means of ensuring compliance with applicable specifications is the availability of a separate safety oversight entity and a well-defined safety oversight mechanism with support of appropriate legislation to be able to carry out the function of safety regulation of heliports. When a heliport is granted a certificate, it signifies to aircraft operators and other organizations operating on the heliport that, at the time of certification, the heliport meets the specifications regarding the facility and its operation, and that it has, according to the certifying authority, the capability to maintain these specifications for the period of validity of the certificate. The certification process also establishes the baseline for continued monitoring of compliance with the specifications. Information on the status of certification of heliports would need to be provided to the appropriate aeronautical information services for promulgation in the Aeronautical Information Publication (AIP). See 2.6.1 and the PANS-AIM (Doc 10066), Appendix 2, AD 1.5 (1).

- 1.4.1 Kuwait DGCA/ASD shall certify heliports used for international operations in accordance with the specifications contained in this Part as well as other relevant ICAO specifications through an appropriate regulatory framework.

Note 1.— In addition to certifying heliports intended to be used by helicopters in international civil aviation, certifying heliports that are open to public use is deemed also to be beneficial for the safety, regularity and efficiency of these operations.

Note 2.— Guidance on heliport certification, including the interrelations between the aerodrome and heliport certification processes in case of co-location on an aerodrome, can be found in the Heliport Manual (Doc 9261).

- 1.4.2 The regulatory framework shall include the establishment of criteria and procedures for the certification of heliports.

Note.— Guidance on a regulatory framework is given in the Heliport Manual (Doc 9261).

- 1.4.3 As part of the certification process, Kuwait DGCA/ASD shall ensure that a heliport manual which will include all pertinent information on the heliport site, facilities, services, equipment, operating procedures, organization and management including a safety management system (SMS), is submitted by the applicant for approval/acceptance prior to granting the heliport certificate.

Note 1.— Guidance on the contents of a heliport manual, including procedures for its submission and approval/acceptance, verification of compliance and granting of a heliport certificate, can be found in the Heliport Manual (Doc 9261).

Note 2.— Annex 19 — Safety Management contains SMS provisions applicable to certified heliports. Overarching guidance on SMS is contained in the Safety Management Manual (Doc 9859) with sector-specific guidance found in the Heliport Manual (Doc 9261).

1.5 ICAO Annex 14 compliance

- 1.5.1. Except as provided in this paragraph, the operator of a certificated heliport shall comply with the regulations contained in KCASR 14, Volume II – Aerodrome - Heliports. Where there is a difference between KCASR 14, Volume II – Aerodrome - Heliports and ICAO SARPs, the heliport operator shall comply with the more stringent provision. (See Appendix 4 for compliance statement).

- 1.5.2. An alternative means of compliance to that specified in this KCASR Part 14 Volume II, Heliports may be proposed through the submission to the Kuwait DGCA of an aeronautical study. An aeronautical study is a study of an aeronautical problem to identify possible solutions and select a solution that is acceptable without degrading safety. An aeronautical study shall:

- assess the impact of a proposed deviation from the requirements;
- present alternative means of ensuring the safety of aircraft operations; and
- estimate the effectiveness of each alternative and to recommend procedures to compensate for the deviation.

Issue 4	Revision 4	Oct. 2025	Page 14 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

- 1.5.3. Any agreement or contract between a heliport operator and any service provider or sub-contractor providing services to the heliport operator shall include the specific requirement for compliance with KCASR 14, Volume II – Aerodrome - Heliports as appropriate.

1.6 Exemptions

- 1.6.1. The Kuwait DGCA may exempt, in writing, a heliport operator from complying with specific provisions of these requirements. However, before the Kuwait DGCA decides to exempt the heliport operator, the Kuwait DGCA must take into account all safety-related aspects.
- 1.6.2. An exemption is subject to the heliport operator complying with the conditions and procedures specified by the Kuwait DGCA in any heliport certificate, licence or approval as being necessary in the interest of safety.
- 1.6.3. When a heliport does not meet the requirement of a standard or practice specified in a requirement, the Kuwait DGCA may determine, after reviewing the submitted aeronautical study, only if and where permitted by the standards and practices, the alternative conditions and procedures that are necessary to ensure a level of safety equivalent to that established by the relevant standard or practice.
- 1.6.4. Any accepted deviation from a standard or practice and conditions and procedures referred to shall be set out in an endorsement to any certificate, licence or approval.

Common reference systems

1.7.1. Horizontal reference system

World Geodetic System — 1984 (WGS-84) shall be used as the horizontal (geodetic) reference system. Reported aeronautical geographical coordinates (indicating latitude and longitude) shall be expressed in terms of the WGS-84 geodetic reference datum.

Note — Comprehensive guidance material concerning WGS-84 is contained in the World Geodetic System — 1984 (WGS-84), Manual (ICAO Doc 9674).

1.7.2. Vertical reference system

Mean sea level (MSL) datum, which gives the relationship of gravity-related height (elevation) to a surface known as the geoid, shall be used as the vertical reference system.

Note 1 — The geoid globally most closely approximates MSL. It is defined as the equipotential surface in the gravity field of the Earth which coincides with the undisturbed MSL extended continuously through the continents.

Note 2 — Gravity-related heights (elevations) are also referred to as orthometric heights while distances of points above the ellipsoid are referred to as ellipsoidal heights.

1.7.3. Temporal reference system

1.7.3.1 The Gregorian calendar and Coordinated Universal Time (UTC) shall be used as the temporal reference system.

1.7.3.2 When a different temporal reference system is used, this shall be indicated in GEN 2.1.2 of the Aeronautical Information Publication (AIP).



Chapter 2. Heliport data

2.1 Aeronautical data

- 2.1.1 Determination and reporting of heliport-related aeronautical data shall be in accordance with the accuracy and integrity classification required to meet the needs of the end-user of aeronautical data

Note — Specifications concerning the accuracy and integrity classification related to heliport related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1

- 2.1.2 Digital data error detection techniques shall be used during the transmission and/or storage of aeronautical data and digital data sets.

Note .— Detailed specifications concerning digital data error detection techniques are contained in PANS-AIM (Doc 10066).

2.2. Heliport reference point

- 2.2.1. A heliport reference point shall be established for a heliport not collocated with an aerodrome.

Note — *When the heliport is collocated with an aerodrome, the established aerodrome reference point serves both aerodrome and heliport.*

- 2.2.2. The heliport reference point shall be located near the initial or planned geometric centre of the heliport and shall normally remain where first established.
- 2.2.3. The position of the heliport reference point shall be measured and reported to the aeronautical information services authority in degrees, minutes and seconds.

2.3. Heliport elevations

- 2.3.1. The heliport elevation and geoid undulation at the heliport elevation position shall be measured and reported to the aeronautical information services authority to the accuracy of one-half metre or foot.
- 2.3.2. The elevation of the TLOF and/or the elevation and geoid undulation of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority to the accuracy of one-half metre or foot.

Note — *Geoid undulation must be measured in accordance with the appropriate system of coordinates.*

2.4. Heliport dimensions and related information

- 2.4.1. The following data shall be measured or described, as appropriate, for each facility provided on a heliport:
- (a) heliport type — surface-level, elevated, shipboard or helideck;
 - (b) TLOF — dimensions to the nearest metre or foot, slope, surface type, bearing strength in tonnes (1 000 kg);
 - (c) FATO — type of FATO, true bearing to one-hundredth of a degree, designation number (where appropriate), length and width to the nearest metre or foot, slope, surface type;

- (d) safety area — length, width and surface type;
- (e) helicopter taxiway and helicopter taxi route— designation, width, surface type;
- (f) apron — surface type, helicopter stands;
- (g) approach surface — when elevated, the height of the inner edge above the FATO;
Note.— When the take-off climb surface is elevated, its inner edge and height will be the outer edge of the elevated helicopter clearway as specified in 4.1.14.
- (h) helicopter clearway — length, ground profile; or, when elevated, height above the FATO, length and width; and
- (i) visual aids for approach procedures, marking and lighting of FATO, TLOF, helicopter ground taxiways, helicopter air taxiways and helicopter stands.

- 2.4.2. The geographical coordinates of the geometric centre of the TLOF and/or of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.4.3. The geographical coordinates of appropriate centre line points of helicopter taxiways and helicopter taxi routes shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.4.4. The geographical coordinates of each helicopter stand shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.
- 2.4.5. The geographical coordinates of obstacles in Area 2 (the part within the heliport boundary) and in Area 3 shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and tenths of seconds. In addition, the top elevation, type, marking and lighting (if any) of obstacles shall be reported to the aeronautical information services authority.

Note — PANS-AIM (Doc 10066) Appendix 8 provides requirements for obstacle data determination in Areas 2 and 3.

2.5. Declared distances

The following distances to the nearest metre or foot shall be declared, where relevant, for a heliport:

- (a) take-off distance available;
- (b) rejected take-off distance available; and
- (c) landing distance available.

2.6. Coordination between aeronautical information services and heliport authorities

- 2.6.1. To ensure that aeronautical information services units obtain information to enable them to provide up-to-date pre-flight information and to meet the need for in-flight information, arrangements shall be made between aeronautical information services and heliport authorities responsible for heliport services to report to the responsible aeronautical information services unit, with a minimum of delay:
- (a) information on the status of certification of heliports and information on heliport conditions;
 - (b) the operational status of associated facilities, services and navigation aids within their area of responsibility;
 - (c) any other information considered to be of operational significance.
- 2.6.2. Before introducing changes to the air navigation system, due account shall be taken by the services responsible for such changes of the time needed by the aeronautical information service for the preparation, production and issue of relevant material for promulgation. To ensure timely provision of the information to the aeronautical information service, close coordination between those services concerned is therefore required.
- 2.6.3. Of a particular importance are changes to aeronautical information that affect charts and/or computer-based navigation systems which qualify to be notified by the Aeronautical Information Regulation and control (AIRAC) system, as specified in ICAO Annex 15, Chapter 6. The predetermined, internationally agreed AIRAC effective dates shall be observed by the responsible heliport services when submitting the raw information/data to aeronautical information services.

Note.— Detailed specifications concerning the AIRAC system are contained in ICAO PANS-AIM (Doc 10066), Chapter 6.

- 2.6.4. The heliport services responsible for the provision of raw aeronautical information/data to the aeronautical information services shall do that while taking into account accuracy and integrity requirements required to meet the needs of the end-user of aeronautical data.

Note 1.— Specifications concerning the accuracy and integrity classification of heliport-related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1.

Note 2 — Specifications for the issue of a NOTAM and SNOWTAM are contained in ICAO Annex 15, Chapter 6, PANS-AIM (Doc 10066), and Appendices 3 and 4, respectively.

Note 3 — The AIRAC information is distributed by the AIS at least 42 days in advance of the AIRAC effective dates with the objective of reaching recipients at least 28 days in advance of the effective date.

Note 4 — The schedule of the predetermined internationally agreed AIRAC common effective dates at intervals of 28 days and guidance for the AIRAC use are contained in ICAO Aeronautical Information Services Manual (Doc 8126, Chapter 2, 2.6).

2.7 Rescue and firefighting

Note.— See 6.2 for information on rescue and firefighting services.

- 2.7.1 Information concerning the level of protection provided at a heliport for helicopter rescue and firefighting purposes shall be made available.
- 2.7.2 The level of protection normally available at a heliport shall be expressed in terms of the category of the rescue and firefighting service as described in 6.2 and in accordance with the types and amounts of extinguishing agents normally available at the heliport.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

2.7.3 Changes in the level of protection normally available at a heliport for rescue and firefighting shall be notified to the appropriate aeronautical information services units and, where applicable, air traffic units to enable them to provide the necessary information to arriving and departing helicopters. When such a change has been corrected, the above units shall be advised accordingly.

Note. — Changes in the level of protection from that normally available at the heliport could result from, but may not be limited to, a change in the availability of extinguishing agent or equipment used to deliver agents, or of personnel used to operate the equipment.

2.7.4 A change shall be expressed in terms of the new category of the rescue and firefighting service available at the heliport.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Chapter 3. Physical Characteristics

3.1. Onshore heliports

Note 1 — The provisions given in this section are based on the design assumption that no more than one helicopter will be in the FATO at the same time.

Note 2 — The design provisions given in this section assume when conducting operations to a FATO in proximity to another FATO, these operations will not be simultaneous. If simultaneous helicopter operations are required, appropriate separation distances between FATOs need to be determined, giving due regard to such issues as rotor downwash and airspace, and ensuring the flight paths for each FATO, defined in Chapter 4, do not overlap. Further guidance on this issue is given in the Heliport Manual (Doc 9261).

Note 3.— The provisions given in this section are common for surface-level heliports and elevated heliports unless otherwise specified.

Note 4.— Guidance on the minimum size for elevated FATO/TLOFs in order to permit facilitation of essential operations around the helicopter is given in the Heliport Manual (Doc 9261).

Note 5.— Guidance on structural design to account for the presence on elevated heliports of personnel, snow, freight, refuelling and firefighting equipment, etc. is given in the Heliport Manual (Doc 9261).

Note 6.— Guidance on siting of a heliport and the location of the various defined areas, with due consideration of the effects of rotor downwash and other aspects of helicopter operations on third parties is given in the Heliport Manual (Doc 9261).

Final approach and take-off areas (FATO)

Note. — Guidance on siting and orientation of the FATO at a heliport to minimize interference of arrival and departure tracks with areas approved for residential use and other noise-sensitive areas close to the heliport is given in the Heliport Manual (Doc 9261).

3.1.1 A FATO shall:

a) provide:

- 1) an area free of obstacles, except for essential objects which because of their function are located on it, and of sufficient size and shape to ensure containment of every part of the design helicopter in the final phase of approach and commencement of take-off - in accordance with the intended procedures;

Note.— Essential objects are visual aids (e.g. lighting) or others (e.g. firefighting systems) necessary for safety purposes. For further requirements regarding penetration of a FATO by essential objects, see 3.1.4.

- 2) when solid, a surface which is resistant to the effects of rotor downwash; and

- i) when collocated with a TLOF, is contiguous and flush with the TLOF; has bearing strength capable of withstanding the intended loads; and ensures effective drainage; or
- ii) when not collocated with a TLOF, is free of hazards should a forced landing be required; and

Note.— Resistant implies that effects from the rotor downwash neither cause a degradation of the surface nor result in flying debris.

- b) be associated with a safety area.

3.1.2 heliport shall be provided with at least one (FATO), which need not be solid.

Note — A FATO may be located on or near a runway strip or taxiway strip.

Issue 4	Revision 4	Oct. 2025	Page 21 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

3.1.3 The minimum dimensions of a FATO shall be:

- a) where intended to be used by helicopters operated in performance class 1:
 - 1) the length of the Rejected Take-Off Distance (RTOD) for the required Take-Off procedure prescribed in the helicopter flight manual (HFM) of the helicopters for which the FATO is intended, or 1.5 Design D, whichever is greater; and
 - 2) the width for the required procedure prescribed in the HFM of the helicopters for which the FATO is intended, or 1.5 Design D, whichever is greater.
- b) where intended to be used by helicopters operated in performance classes 2 or 3, the lesser of:
 - 1) an area within which can be drawn a circle of diameter of 1.5 Design D; or,
 - 2) when there is a limitation on the direction of approach and touchdown, an area of sufficient width to meet the requirement of 3.1.1 a) 1) but not less than 1.5 times the overall width of the design helicopter.

Note 1.— The RTOD is intended to ensure containment of the helicopter during a rejected take-off. Although some flight manuals provide the RTOD, in others the dimension provided is the “minimum demonstrated ... size” (where “...” could be “heliport”, “runway”, “helideck” etc.) and this may not include helicopter containment. When this is the case, it is necessary to consider sufficient safety area dimensions as well as the dimensions of 1.5·D for the FATO, should the HFM not deliver data. For further guidance see Heliport Manual (Doc 9261).

Note 2. — Local conditions, such as elevation, temperature and permitted manoeuvring may need to be considered when determining the size of a FATO. Guidance is given in the ICAO Heliport Manual (Doc 9261).

3.1.4 Essential objects located in a FATO shall not penetrate a horizontal plane at the FATO elevation by more than 5 cm.

3.1.5 When the FATO is solid the slope shall not:

- a) except as provided in b) or c) below; exceed 2 per cent in any direction;
- b) when the FATO is elongated and intended to be used by helicopters operated in performance class 1, exceed 3 per cent overall, or have a local slope exceeding 5 per cent; and
- c) when the FATO is elongated and intended to be used solely by helicopters operated in performance class 2 or 3, exceed 3 per cent overall, or have a local slope exceeding 7 per cent.

3.1.6 The FATO shall be located so as to minimise the influence of the surrounding environment, including turbulence, which could have an adverse impact on helicopter operations.

Note — *Guidance on determining the influence of turbulence is given in the ICAO Heliport Manual (Doc 9261). If turbulence mitigating design measures are warranted but not practical, operational limitations may need to be considered under certain wind conditions.*

3.1.7 A FATO shall be surrounded by a safety area which need not be solid.

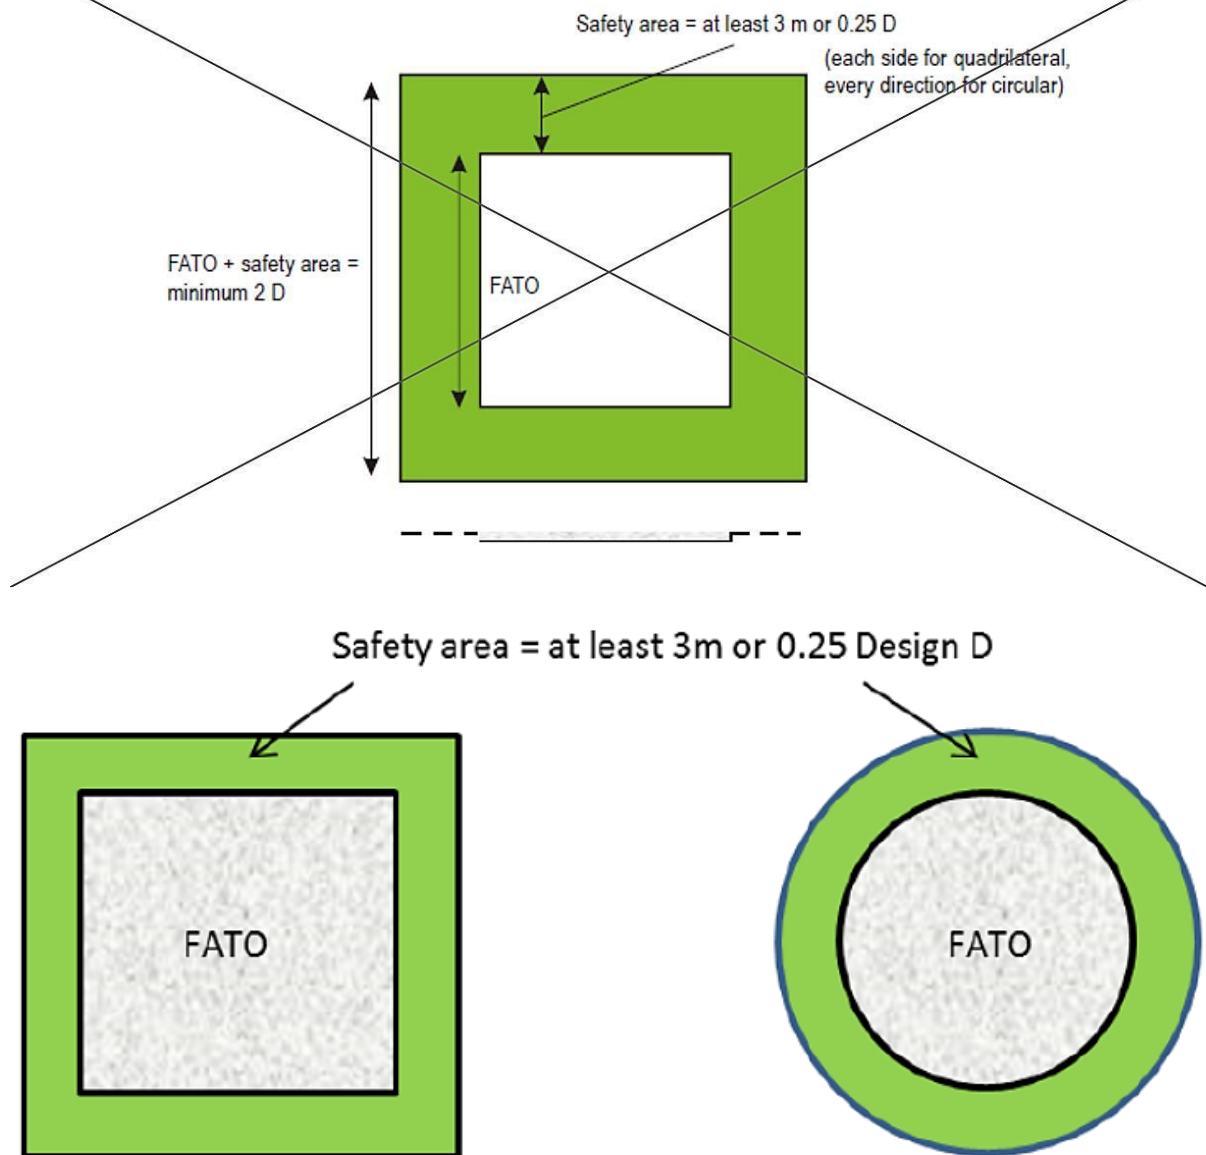


Figure 3-1. FATO and associated safety area

Safety areas

3.1.8 A safety area shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it, to compensate for manoeuvring errors; and
- b) when solid, a surface which: is contiguous and flush with the FATO; is resistant to the effects of rotor downwash; and ensures effective drainage.

3.1.9 The safety area surrounding a FATO shall extend outwards from the periphery of the FATO for a distance of at least 3 m or 0.25 Design D, whichever is greater.

3.1.10 No mobile object shall be permitted in a safety area during helicopter operations.

3.1.11 Essential objects located in the safety area shall not penetrate a surface originating at the edge of the FATO at a height of 25 cm above the plane of the FATO sloping upwards and outwards at a gradient of 5 per cent.

3.1.12 When solid, the slope of the safety area should not exceed an upward slope of 4 per cent outwards from the edge of the FATO.

Protected side slope

3.1.13 A heliport shall be provided with at least one protected side slope, rising at 45 degrees outward from the edge of the safety area and extending to a distance of 10 m (see Figure 3.2).

3.1.14 A heliport shall be provided with at least two protected side slopes, rising at 45 degrees outward from the edge of the safety area and extending to a distance of 10 m.

3.1.15 The surface of a protected side slope shall not be penetrated by obstacles.

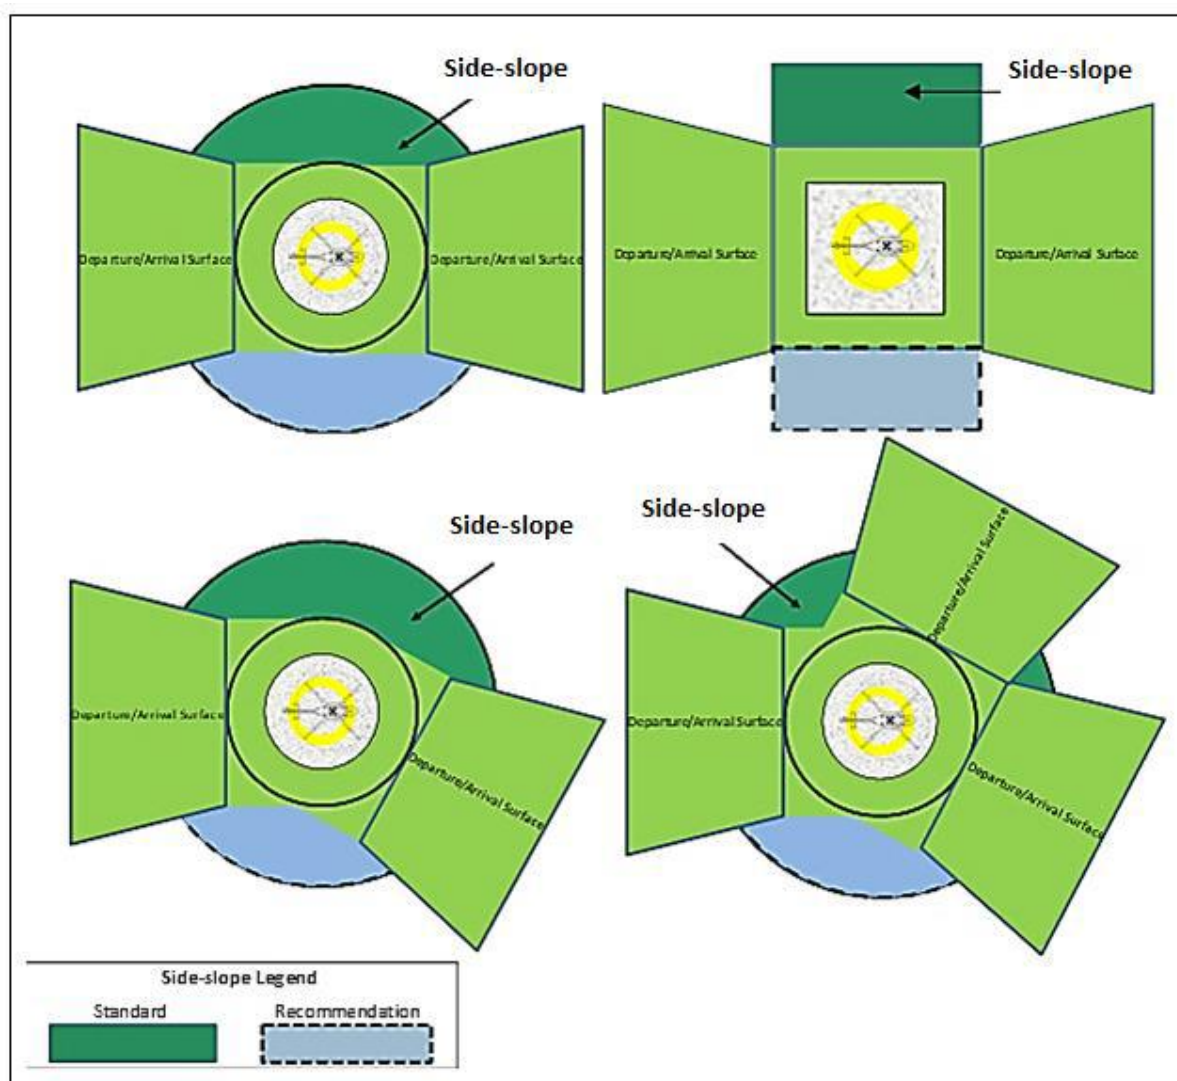


Figure 3-2. FATO simple/complex safety area and side slope protection

Note.— These diagrams show a number of configurations of FATO/Safety Areas/Side slopes. For a more complex arrival/departure arrangement which consists of: two surfaces that are not diametrically opposed; more than two surfaces; or an extensive obstacle free sector (OFS) which abuts directly to the FATO, it can be seen that appropriate provisions are necessary to ensure that there are no obstacles between the FATO and/or safety area and the arrival/departure surfaces.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Helicopter clearways

Note.— The inclusion of detailed specifications for helicopter clearways in this section is not intended to imply that a clearway has to be provided.

3.1.16 A helicopter clearway shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it, and of sufficient size and shape to ensure containment of the design helicopter when it is accelerating in level flight, and close to the surface, to achieve its safe climbing speed; and
- b) when solid, a surface which: is contiguous and flush with the FATO and safety area,; is resistant to the effects of rotor downwash; and is free of hazards if a forced landing be required; or
- c) when elevated, clearance above all obstacles.

3.1.17 When a helicopter clearway is provided, the inner edge shall be located:

- a) at the outer edge of the safety area; or
- b) when elevated, directly above, or directly below, the outer edge of the safety area.

Note.— Guidance on designing a clearway that is below the FATO of an elevated heliport/helideck is provided in Heliport Manual (Doc 9261).

3.1.18 The width of a helicopter clearway shall not be less than the width of the FATO and associated safety area. (See Figure 3-1.)

3.1.19 When solid, the ground in a helicopter clearway shall not project above a plane having an overall upward slope of 3 per cent having a local upward slope exceeding 5 per cent, the lower limit of this plane being a horizontal line which is located on the periphery of the FATO.

3.1.20 An object situated in a helicopter clearway, which may endanger helicopters in the air, shall be regarded as an obstacle and should be removed.

Touchdown and lift-off areas

3.1.21 A TLOF shall:

a) provide:

- 1) an area free of obstacles and of sufficient size and shape to ensure containment of the undercarriage of the most demanding helicopter the TLOF is intended to serve in accordance with the intended orientation;
- 2) a surface which:
 - i) has sufficient bearing strength to accommodate the dynamic loads associated with the anticipated type of arrival of the helicopter at the designated TLOF;
 - ii) is free of irregularities that would adversely affect the touchdown or lift-off of helicopters;
 - iii) has sufficient friction to avoid skidding of helicopters or slipping of persons;
 - iv) is resistant to the effects of rotor downwash; and
 - v) ensures effective drainage while having no adverse effect on the control or stability of a helicopter during touchdown and lift-off, or when stationary; and

b) be associated with a FATO or a stand.

Issue 4	Revision 4	Oct. 2025	Page 25 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

3.1.22 A heliport shall be provided with at least one TLOF.

3.1.23 A TLOF shall be provided whenever it is intended that the undercarriage of the helicopter will touch down within a FATO or stand, or lift off from a FATO or stand.

3.1.24 The minimum dimensions of a TLOF shall be:

- a) when in a FATO intended to be used by helicopters operated in performance class 1, the dimensions for the required procedure prescribed in the helicopter flight manuals (HFMs) of the helicopters for which the TLOF is intended; and
- b) when in a FATO intended to be used by helicopters operated in performance classes 2 or 3, or in a stand:
 - 1) when there is no limitation on the direction of touchdown, of sufficient size to contain a circle of diameter of at least 0.83 D of:
 - i) in a FATO, the design helicopter; or
 - ii) in a stand, the largest helicopter the stand is intended to serve;
 - 2) when there is a limitation on the direction of touchdown, of sufficient width to meet the requirement of 3.1.21 a) 1) above but not less than twice the undercarriage width (UCW) of:
 - i) in a FATO, the design helicopter; or,
 - ii) in a stand, the most demanding helicopter the stand is intended to serve.

3.1.25 For an elevated heliport, the minimum dimensions of a TLOF, when in a FATO, shall be of sufficient size to contain a circle of diameter of at least 1 Design-D.

3.1.26 Slopes on a TLOF shall not:

- a) except as provided in b) or c) below; exceed 2 per cent in any direction;
- b) when the TLOF is elongated and intended to be used by helicopters operated in performance class 1; exceed 3 per cent overall, or have a local slope exceeding 5 per cent; and
- c) when the TLOF is elongated and intended to be used solely by helicopters operated in performance class 2 or 3, exceed 3 per cent overall, or have a local slope exceeding 7 per cent.

3.1.27 When a TLOF is within a FATO it should be:

- a) centred on the FATO; or
- b) for an elongated FATO, centred on the longitudinal axis of the FATO.

3.1.28 When a TLOF is within a helicopter stand, it shall be centred on the stand.

1. 3.1.29 A TLOF shall be provided with markings which clearly indicate the touchdown position and, by their form, any limitations on manoeuvring.
2. *Note.— When a TLOF in a FATO is larger than the minimum dimensions, the TDPM may be offset while ensuring containment of the undercarriage within the TLOF and the helicopter within the FATO.*
3. 3.1.30 Where an elongated Performance Class 1 FATO/TLOF contains more than one TDPM, measures shall be in place to ensure that only one can be used at a time.
4. 3.1.31 Where alternative TDPMs are provided they shall be placed to ensure containment of the undercarriage within the TLOF and the helicopter within the FATO.

Issue 4	Revision 4	Oct. 2025	Page 26 of 121
----------------	-------------------	------------------	-----------------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5. *Note.— The efficacy of the rejected take-off or landing distance will be dependent upon the helicopter being correctly positioned for take-off, or landing.*
6. 3.1.32 Safety devices such as safety nets or safety shelves shall be located around the edge of an elevated heliport but shall not exceed the height of the TLOF.

Helicopter taxiways and ground taxi-routes

Note 1.— The specifications for ground taxi-routes and air taxi-routes are intended for the safety of simultaneous operations during the manoeuvring of helicopters. The effect of wind velocity/turbulence induced by the rotor downwash would need to be considered.

Note 2.— The defined areas addressed in this section are taxiways and ground/air taxi-routes:

- a) Taxiways associated with air taxi-routes may be used by both wheeled and skidded helicopters for either ground or air taxiing.
- b) Ground taxi-routes are meant for use by wheeled helicopters, for ground taxiing only.
- c) Air taxi-routes are meant for use by air taxiing only.

Helicopter taxiways

Note 1.— A helicopter taxiway is intended to permit the surface movement of a wheeled helicopter under its own power.

Note 2.— A helicopter taxiway can be used by a wheeled helicopter for air taxi if associated with a helicopter air taxi-route.

Note 3.— When a taxiway is intended for use by aeroplanes and helicopters, the provisions for aeroplane taxiways; taxiway strips; helicopter taxiways; and taxi-routes will be taken into consideration and the more stringent requirements will be applied.

3.1.33 A helicopter taxiway shall:

- a) provide:
 - 1) an area free of obstacles and of sufficient width to ensure containment of the undercarriage of the most demanding wheeled helicopter the taxiway is intended to serve;
 - 2) a surface which:
 - i) has bearing strength to accommodate the taxiing loads of the helicopters the taxiway is intended to serve;
 - ii) is free of irregularities that would adversely affect the ground taxiing of helicopters;
 - iii) is resistant to the effects of rotor downwash; and
 - iv) ensures effective drainage while having no adverse effect on the control or stability of a wheeled helicopter when being manoeuvred under its own power, or when stationary; and
- b) be associated with a taxi-route.

3.1.34 The minimum width of a helicopter taxiway shall be the lesser of:

Issue 4	Revision 4	Oct. 2025	Page 27 of 121
---------	------------	-----------	----------------

- a) two times the undercarriage width (UCW) of the most demanding helicopter the taxiway is intended to serve; or
- b) a width meeting the requirements of 3.1.33 a) 1).

3.1.35 The transverse slope of a taxiway shall not exceed 2 per cent and the longitudinal slope shall not exceed 3 per cent.

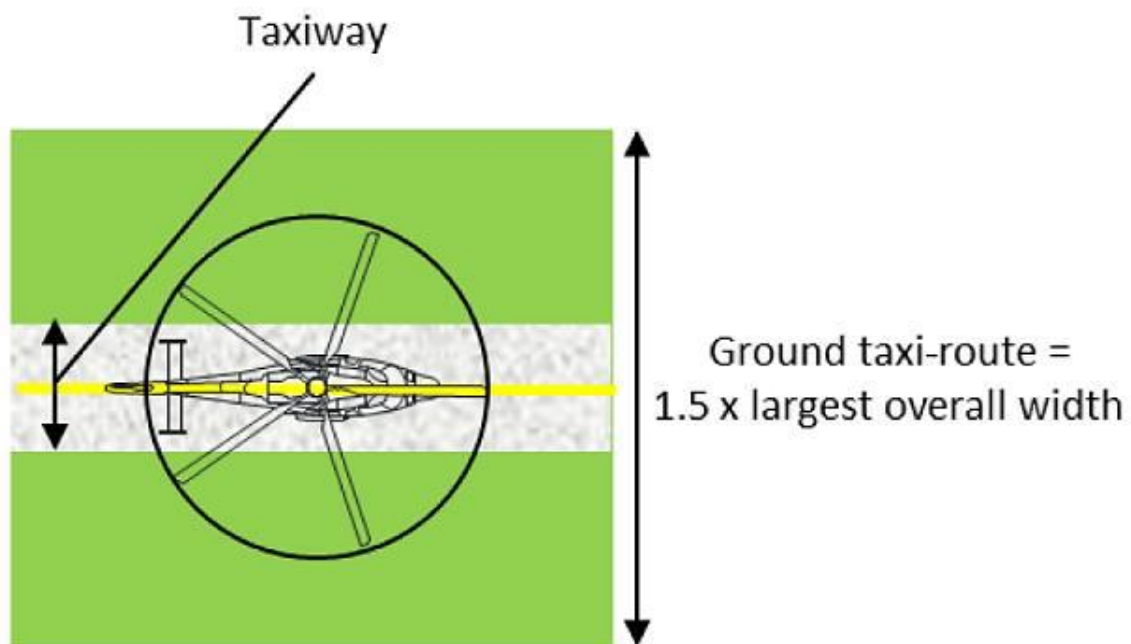


Figure 3-2 – Helicopter taxiway **ground taxi-route**

Helicopter taxi-routes

3.1.36 A helicopter taxi-route shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it, established for the movement of helicopters; with sufficient width to ensure containment of the largest helicopter the taxi-route is intended to serve;
- b) when solid, a surface which is resistant to the effects of rotor downwash; and
 - 1) when collocated with a taxiway:
 - i) is contiguous and flush with the taxiway;
 - ii) does not present a hazard to operations; and
 - iii) ensures effective drainage; and
 - 2) when not collocated with a taxiway:
 - i) is free of hazards if a forced landing is required.

3.1.37 No mobile object shall be permitted on a taxi-route during helicopter operations.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Note.— See ICAO Heliport Manual (Doc 9261) for further guidance.

- 3.1.38 When solid and collocated with a taxiway, the taxi-route should not exceed an upward transverse slope of 4 per cent outwards from the edge of the taxiway. When solid and collocated with a taxiway, the taxi-route should not exceed an upward transverse slope of 4 per cent outwards from the edge of the taxiway.

Helicopter ground taxi-routes

- 3.1.39 A helicopter ground taxi-route shall have a minimum width of 1.5 x the overall width of the largest helicopter it is intended to serve, and be centred on a taxiway.

- 3.1.40 Essential objects located in a helicopter ground taxi-route shall not:

- a) be located at a distance of less than 50 cm outwards from the edge of the helicopter ground taxiway; and
- b) penetrate a surface originating 50 cm outwards of the edge of the helicopter taxiway and a height of 25 cm above the surface of the taxiway and sloping upwards and outwards at a gradient of 5 per cent.

Helicopter air taxi-routes

Note — A helicopter air taxi-route is intended to permit the movement of a helicopter above the surface at a height normally associated with ground effect and at ground speed less than 37km/h (20 kt).

- 3.1.41 A helicopter air taxi-route shall have a minimum width of twice the overall width of the largest helicopter it is intended to serve.

- 3.1.42 If collocated with a taxiway for the purpose of permitting both ground and air taxi operations (see Figure 3.4):

- a) the helicopter air taxi-route shall be centred on the taxiway; and
- b) essential objects located in the helicopter air taxi-route shall not:

- 1) be located at a distance of less than 50 cm outwards from the edge of the helicopter taxiway; and

- 2) penetrate a surface originating 50 cm outwards of the edge of the helicopter taxiway and a height of 25 cm above the surface of the taxiway and sloping upwards and outwards at a gradient of 5 per cent. The slopes of the surface of a helicopter air taxiway should not exceed the slope landing limitations of the helicopters the helicopter air taxiway is intended to serve. In any event the transverse slope should not exceed 10 per cent and the longitudinal slope should not exceed 7 per cent.

- 3.1.43 When not collocated with a taxiway, The slopes of the surface of a helicopter air taxiway an air taxi-route shall not exceed the slope landing limitations of the helicopters the helicopter air taxiway the taxi-route is intended to serve. In any event, the transverse slope shall not exceed 10 per cent and the longitudinal slope shall not exceed 7 per cent.

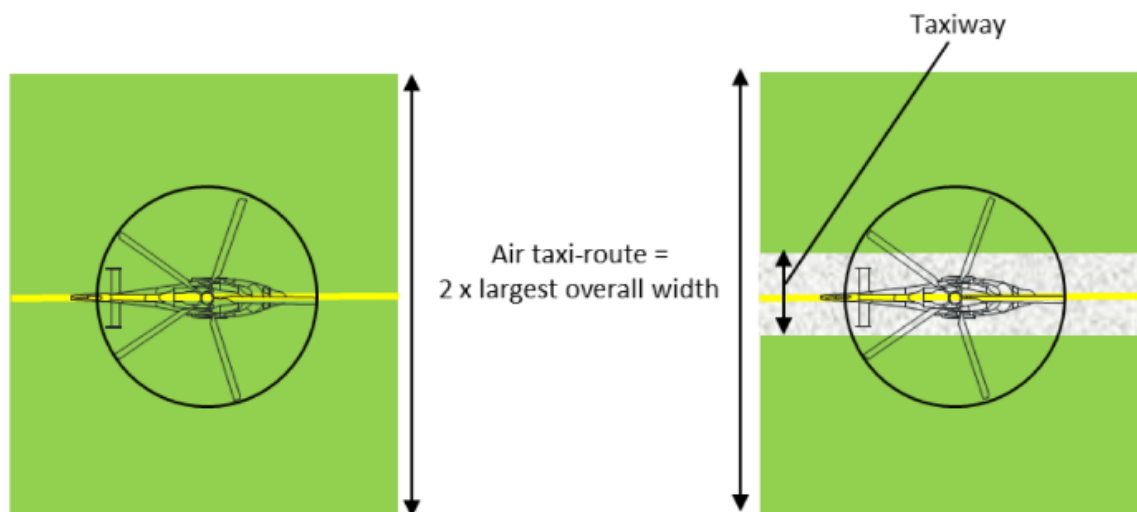


Figure 3-4 - Helicopter air taxi-route and combined air taxi-route/taxiway

Helicopter stands

Note — The provisions of this section do not specify the location for helicopter stands but allow a high degree of flexibility in the overall design of the heliport. However, it is not considered good practice to locate helicopter stands under a flight path. See ICAO Heliport Manual (Doc 9261) for further guidance.

3.1.44 3.1 A helicopter stand shall:

a) provide:

- 1) an area free of obstacles and of sufficient size and shape to ensure containment of every part of the largest helicopter the stand is intended to serve when it is being positioned within the stand;
- 2) a surface which:
 - i) is resistant to the effects of rotor downwash;
 - ii) is free of irregularities that would adversely affect the manoeuvring of helicopters;
 - iii) has bearing strength capable of withstanding the intended loads;
 - iv) has sufficient friction to avoid skidding of helicopters or slipping of persons; and
 - v) ensures effective drainage while having no adverse effect on the control or stability of a wheeled helicopter when being manoeuvred under its own power, or when stationary; and

b) be associated with a protection area.

3.1.45 The minimum dimensions of a helicopter stand shall be:

- a) a circle of diameter of 1.2 D of the largest helicopter the stand is intended to serve; or
- b) when there is a limitation on manoeuvring and positioning, of sufficient width to meet the requirement of 3.1.44 a) 1) above but not less 1.2 times overall width of largest helicopter the stand is intended to serve.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Note 1.— For a helicopter stand intended to be used for taxi-through only, a width less than 1.2D but which provides containment and still permits all required functions of a stand to be performed, might be used (in accordance with 3.1.44 a) 1)).

Note 2.— For a helicopter stand intended to be used for turning on the ground, the minimum dimensions may be influenced by the turning circle data provided by the manufacturer and are likely to exceed 1.2 D. See the Heliport Manual (Doc 9261) for further guidance.

- 3.1.46 The mean slope of a helicopter stand in any direction shall not exceed 2 per cent.
- 3.1.47 Each helicopter stand shall be provided with positioning markings to clearly indicate where the helicopter is to be positioned and, by their form, any limitations on manoeuvring.
- 3.1.48 A stand shall be surrounded by a protection area which need not be solid.

Protection areas

3.1.49 3.1.49 A protection area shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it; and
- b) when solid, a surface which is contiguous and flush with the stand; is resistant to the effects of rotor downwash; and ensures effective drainage.

3.1.50 When associated with a stand designed for turning, the protection area shall extend outwards from the periphery of the stand for a distance of 0.4D. (See Figure 3.5).

3.1.51 When associated with a stand designed for taxi-through, the minimum width of the stand and protection area shall not be less than the width of the associated taxi-route (see Figures 3.6 and 3.7).

3.1.52 When associated with a stand designed for non-simultaneous use (see Figures 3.8 and 3.9):

- a) the protection area of adjacent stands may overlap but shall not be less than the required protection area for the larger of the adjacent stands; and
- b) the adjacent non-active stand may contain a static object but it shall be wholly within the boundary of the stand.

Note.— To ensure that only one of the adjacent stands is active at a time, instruction to pilots in the AIP make clear that a limitation on the use of the stands is in force.

3.1.53 No mobile object shall be permitted in a protection area during helicopter operations.

3.1.54 Essential objects located in the protection area shall not:

- (a) if located at a distance of less than 0.75 D from the centre of the helicopter stand, penetrate a plane at a height of 5 cm above the plane of the central zone; and
- (b) if located at a distance of 0.75 D or more from the centre of the helicopter stand, penetrate a plane at a height of 25 cm above the plane of the central zone and sloping upwards and outwards at a gradient of 5 per cent.

3.1.55 When solid, the slope of a protection area shall not exceed an upward slope of 4 per cent outwards from the edge of the stand.

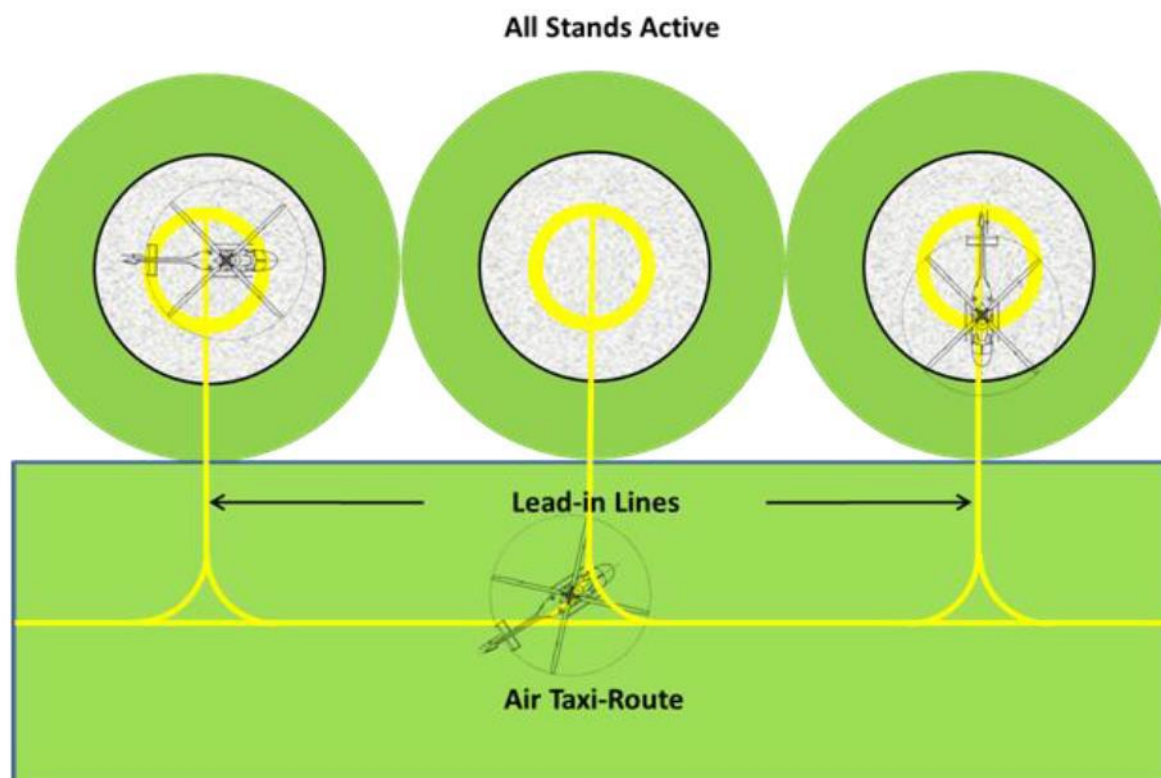


Figure 3-5. Turning stands (with air taxi-routes) simultaneous use

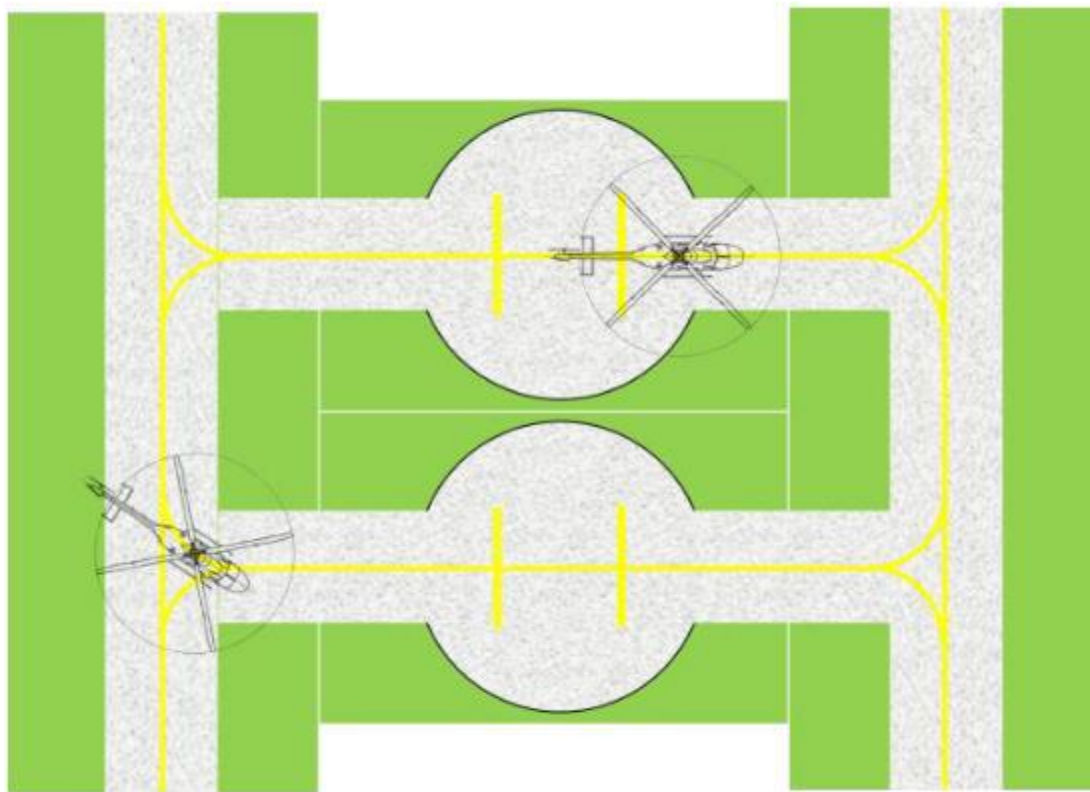


Figure 3-6. Ground taxi-through stands (with taxiway/ground taxi-route) simultaneous use

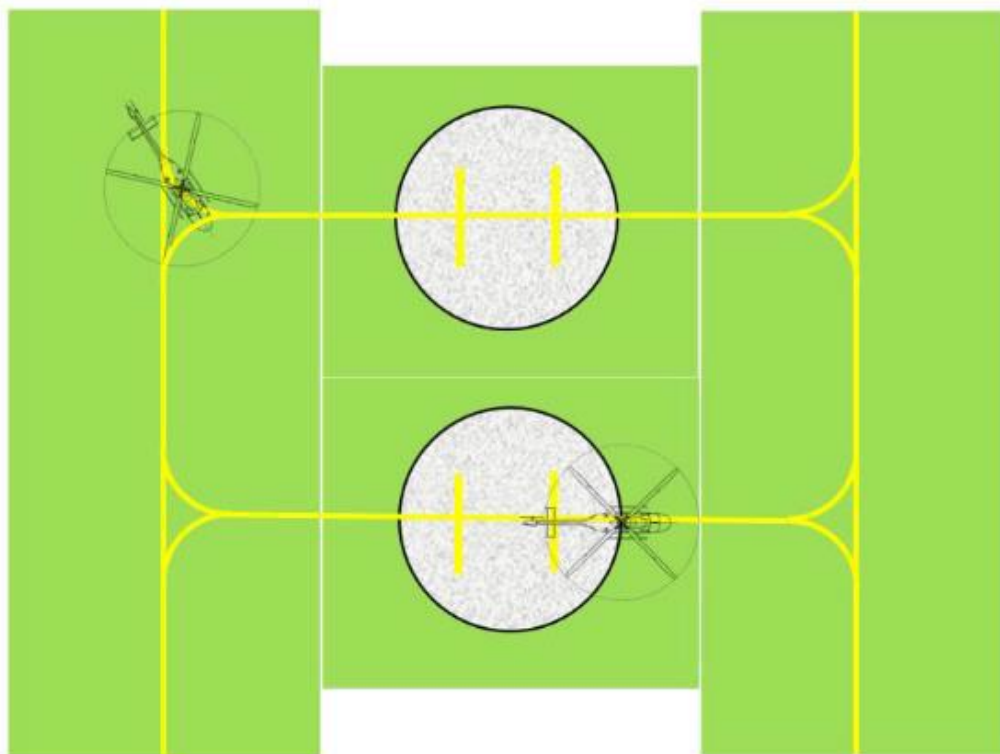


Figure 3-7. Air taxi-through stands (with air taxi-route) simultaneous use

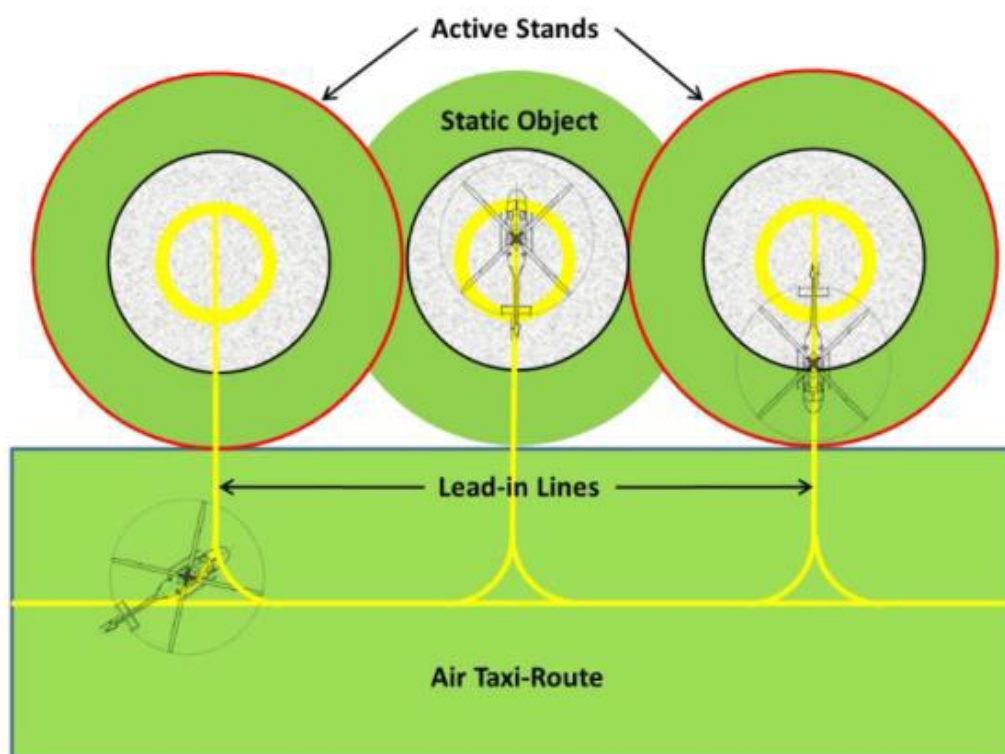


Figure 3-8. Turning stands (with air taxi-routes) non-simultaneous use – outer stands active

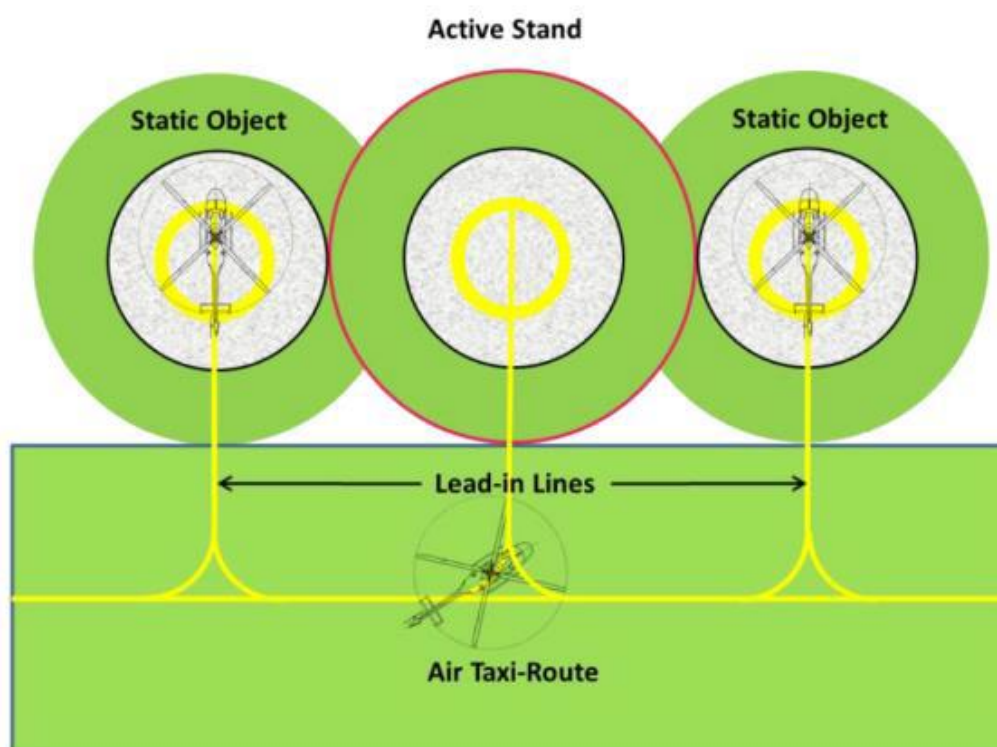


Figure 3-9. Turning stands (with air taxi-route) non-simultaneous use – inner stand active

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Location of a final approach and take-off area in relation to a runway or taxiway

3.1.56 Where a FATO is located near a runway or taxiway, and where simultaneous operations are planned, the separation distance between the edge of a runway or taxiway and the edge of a FATO shall not be less than the appropriate dimension in Table 1.

3.1.57 A FATO should not be located:

- (a) near taxiway intersections or holding points where jet engine efflux is likely to cause high turbulence; or
- (b) near areas where aeroplane vortex wake generation is likely to exist.

If aeroplane mass and/or helicopter mass are	Distance between FATO edge and runway edge or taxiway edge
up to but not including 3 175 kg	60 m
3 175 kg up to but not including 5 760 kg	120 m
5 760 kg up to but not including 100 000 kg	180 m
100 000 kg and over	250 m

Table 3-1. FATO minimum separation distance for simultaneous operations

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

3.2. Helidecks

Note — The following specifications are for helidecks located on structures engaged in such activities as mineral exploitation, research or construction. See 3.4 for shipboard heliport provisions.

Final approach and take-off areas and touchdown and lift-off areas

Note 1 — For helidecks that have a 1 D or larger FATO it is presumed that the FATO and the TLOF will always occupy the same space and have the same load bearing characteristics so as to be coincidental. For helidecks that are less than 1 D, the reduction in size is only applied to the TLOF which is a load bearing area. In this case, the FATO remains at 1 D but the portion extending beyond the TLOF perimeter need not be load bearing for helicopters. The TLOF and the FATO may be assumed to be collocated.

Note 2 — Guidance on the effects of airflow direction and turbulence, prevailing wind velocity and high temperatures from gas turbine exhausts or flare-radiated heat on the location of the FATO is given in ICAO Heliport Manual (Doc 9261).

Note 3 — Guidance on the design and markings for helideck parking areas is given in the Heliport Manual (Doc 9261).

- 3.2.1. The specifications in paragraphs 3.2.14 and 3.2.15 shall be applicable for helidecks completed on or after 1 January 2012.
- 3.2.2. A helideck shall be provided with one FATO and one coincident or collocated TLOF.
- 3.2.3. A FATO may be any shape but shall be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the helideck is intended to serve.
- 3.2.4. A TLOF may be any shape but, subject to an appropriate risk assessment, shall be of sufficient size to contain:
 - an area within which can be accommodated a circle of diameter not less than 0.83 D of the largest helicopter the helideck is intended to serve.

Note.— Further guidance on factors to inform the risk assessment are given in the Heliport Manual (Doc 9261).
- 3.2.5. The TLOF should be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the helideck is intended to serve.
- 3.2.6. A helideck shall be arranged to ensure that a sufficient and unobstructed air-gap is provided which encompasses the full dimensions of the FATO.

Note — Specific guidance on the characteristics of an air-gap is given in ICAO Heliport Manual (Doc 9261). As a general rule, except for shallow superstructures of three stories or less, a sufficient air-gap will be at least 3 m.
- 3.2.7. The FATO should be located so as to avoid, as far as is practicable, the influence of environmental effects, including turbulence, over the FATO, which could have an adverse impact on helicopter operations.
- 3.2.8. The TLOF shall be dynamic load-bearing.
- 3.2.9. The TLOF shall provide ground effect.
- 3.2.10. No fixed object shall be permitted around the edge of the TLOF except for objects, which, because of their function, must be located thereon.
- 3.2.11. For any TLOF 1D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle- free sector

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

whose function requires them to be located on the edge of the TLOF shall not exceed a height of 25 cm.

3.2.12 For any TLOF 1D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF should be as low as possible and in any case not exceed a height of 15 cm.

3.2.13. For any TLOF designed for use by helicopters having a D-value of 16.0 m or less, and any TLOF having dimensions of less than 1D, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF, shall not exceed a height of 5 cm.

Note — *Lighting that is mounted at a height of less than 25 cm is typically assessed for adequacy of visual cues before and after installation.*

3.2.14. Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

Note — *Examples of potential hazards include nets or raised fittings on the deck that might induce dynamic rollover for helicopters equipped with skids.*

3.2.15. Safety devices such as safety nets or safety shelves shall be located around the edge of a helideck but shall not exceed the height of the TLOF.

3.2.16. The surface of the TLOF shall be skid-resistant to both helicopters and persons and be sloped to prevent pooling of water.

Note — *Guidance on rendering the surface of the TLOF skid-resistant is contained in ICAO Heliport Manual (Doc 9261).*

3.3. Shipboard heliports

3.3.1. The specifications in paragraph 3.4.16 and 3.4.17 shall be applicable to shipboard heliports completed on or after 1 January 2012 and 1 January 2015, respectively.

3.3.2. When helicopter operating areas are provided in the bow or stern of a ship or are purpose-built above the ship's structure, they shall be regarded as purpose-built shipboard heliports.

Final approach and take-off areas and touchdown and lift-off areas

Note — *Except for the arrangement described in 3.4.8 b), for shipboard heliports it is presumed that the FATO and the TLOF will be coincidental. Guidance on the effects of airflow direction and turbulence, prevailing wind velocity and high temperature from gas turbine exhausts or flare-radiated heat on the location of the FATO is given in ICAO Heliport Manual (Doc 9261).*

3.3.3. A shipboard heliport shall be provided with one FATO and one coincidental or collocated TLOF.

3.3.4. A FATO may be any shape but shall be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the heliport is intended to serve.

3.3.5. The TLOF of a shipboard heliport shall be dynamic load-bearing.

3.3.6. The TLOF of a shipboard heliport shall provide ground effect.

Issue 4	Revision 4	Oct. 2025	Page 38 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

3.3.7. For purpose-built shipboard heliports provided in a location other than the bow or stern, the TLOF shall be of sufficient size to contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve.

3.3.8. For purpose-built shipboard heliports provided in the bow or stern of a ship, the TLOF shall be of sufficient size to:

(a) contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve; or

(b) for operations with limited touchdown directions, contain an area within which can be accommodated two opposing arcs of a circle with a diameter of not less than 1 D in the helicopter's longitudinal direction. The minimum width of the heliport shall be not less than 0.83 D. (See Figure 7.)

Note 1 — The ship will need to be manoeuvred to ensure that the relative wind is appropriate to the direction of the helicopter touchdown heading.

Note 2 — The touchdown heading of the helicopter is limited to the angular distance subtended by the 1 D arc headings, minus the angular distance which corresponds to 15 degrees at each end of the arc.

3.3.9. For non-purpose-built shipboard heliports, the TLOF shall be of sufficient size to contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve.

3.3.10. A shipboard heliport shall be arranged to ensure that a sufficient and unobstructed air-gap is provided which encompasses the full dimensions of the FATO.

Note — Specific guidance on the characteristics of an air-gap is given in ICAO Heliport Manual (Doc 9261). As a general rule, except for shallow superstructures of three stories or less, a sufficient air-gap will be at least 3 m.

3.3.11. The FATO should be located so as to avoid, as far as is practicable, the influence of environmental effects, including turbulence, over the FATO, which could have an adverse impact on helicopter operations.

3.3.12. No fixed object shall be permitted around the edge of the TLOF except for objects, which, because of their function, must be located thereon.

3.3.13. For any TLOF 1D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF shall not exceed a height of 25 cm.

3.3.14. For any TLOF 1D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF should be as low as possible and in any case not exceed a height of 15 cm.

3.3.15. For any TLOF designed for use by helicopters having a D-value of 16.0 m or less, and any TLOF having dimensions of less than 1D, objects in the obstacle-free sector, whose function requires them to be located on the edge of the TLOF, shall not exceed a height of 5 cm.

Note — Lighting that is mounted at a height of less than 25 cm is typically assessed for adequacy of visual cues before and after installation.

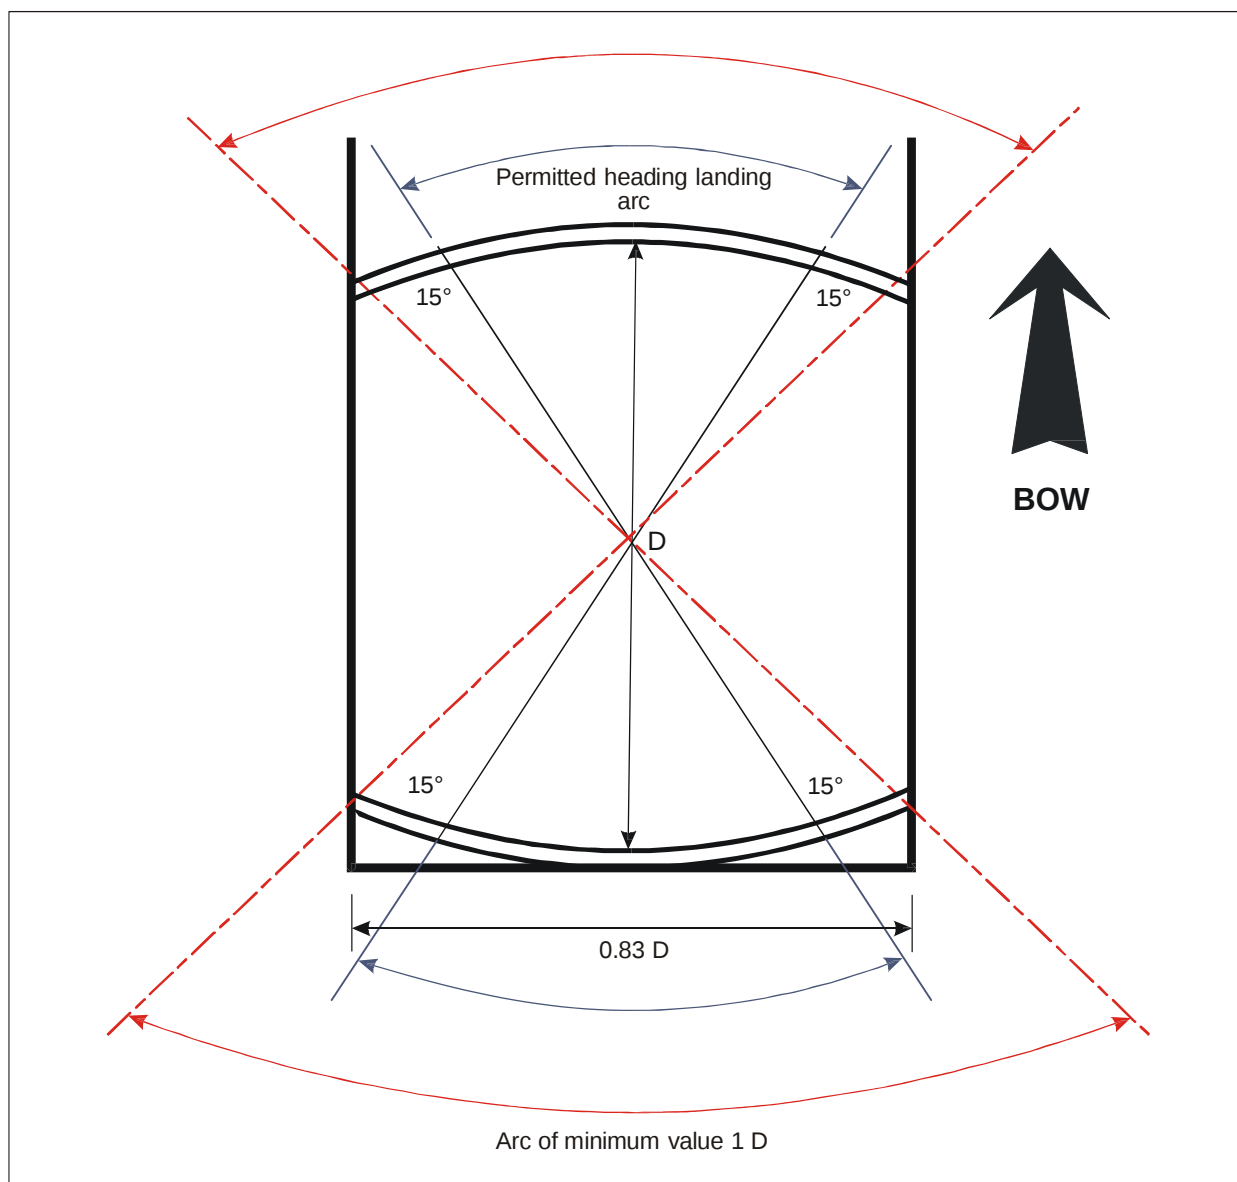


Figure 7 – Shipboard permitted landing headings for limited heading operations
(ICAO Annex 14, Vol.II, Fig. 3-7)

- 3.3.16. Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.
- 3.3.17. Safety devices such as safety nets or safety shelves shall be located around the edge of a shipboard heliport, except where structural protection exists, but shall not exceed the height of the TLOF.
- 3.3.18. The surface of the TLOF shall be skid-resistant to both helicopters and persons.



Chapter 4. Obstacle Environment

Note — The objectives of the specifications in this chapter are to describe the airspace around heliports so as to permit intended helicopter operations to be conducted safely and to prevent, where appropriate State controls exist, heliports from becoming unusable by the growth of obstacles around them. This is achieved by establishing a series of obstacle limitation surfaces that define the limits to which objects may project into the airspace.

4.1. Obstacle limitation surfaces and sectors

Note 1.— A full description, detailed explanation and visual depiction of the obstacle limitation surfaces and sectors is provided in the Heliport Manual (Doc 9261).

Note 2.— For guidance on the provision of vertical procedures, see the Heliport Manual (Doc 9261).

Note 3.— For guidance on the provision of elevated helicopter clearways and elevated surfaces, see the Heliport Manual (Doc 9261).

Note 4.— See Table 4-1 for dimensions and slopes of surfaces.

Approach surface

4.1.1. Description:

An inclined plane or a combination of planes or, when a turn or turns are involved, a complex surface sloping upwards from the inner edge and centred on a line passing through the centre of the FATO.

4.1.2. Characteristics:

The limits of an approach surface shall comprise:

- (a) an inner edge, horizontal and perpendicular to the centre line of the approach surface, with a minimum width equal to the specified width/diameter of the FATO plus the safety area, and located at
 - 1) the outer edge of the safety area; or
 - 2) when vertical procedures are being utilized, directly above the outer edge of the safety area.
- (b) two side edges originating at the ends of the inner edge diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and:
- (c) an outer edge horizontal and perpendicular to the centre line of the approach surface at;
 - 1) height of 152 m (500 ft) above the elevation of the FATO; Or
 - 2) when a PinS approach procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.

4.1.3. The elevation of the inner edge shall be;

- a) The elevation of the FATO at the point on the inner edge that is intersected by the centre line of the approach surface; or
- b) when vertical procedures are being utilized; the level at which obstacle clearance is achieved.

- 4.1.4. The slope(s) of the approach surface shall be measured in the vertical plane containing the centre line of the surface.
- 4.1.5. In the case of an approach surface involving a turn or turns, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight approach surface.

Note — See Figure 4-1 , For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).

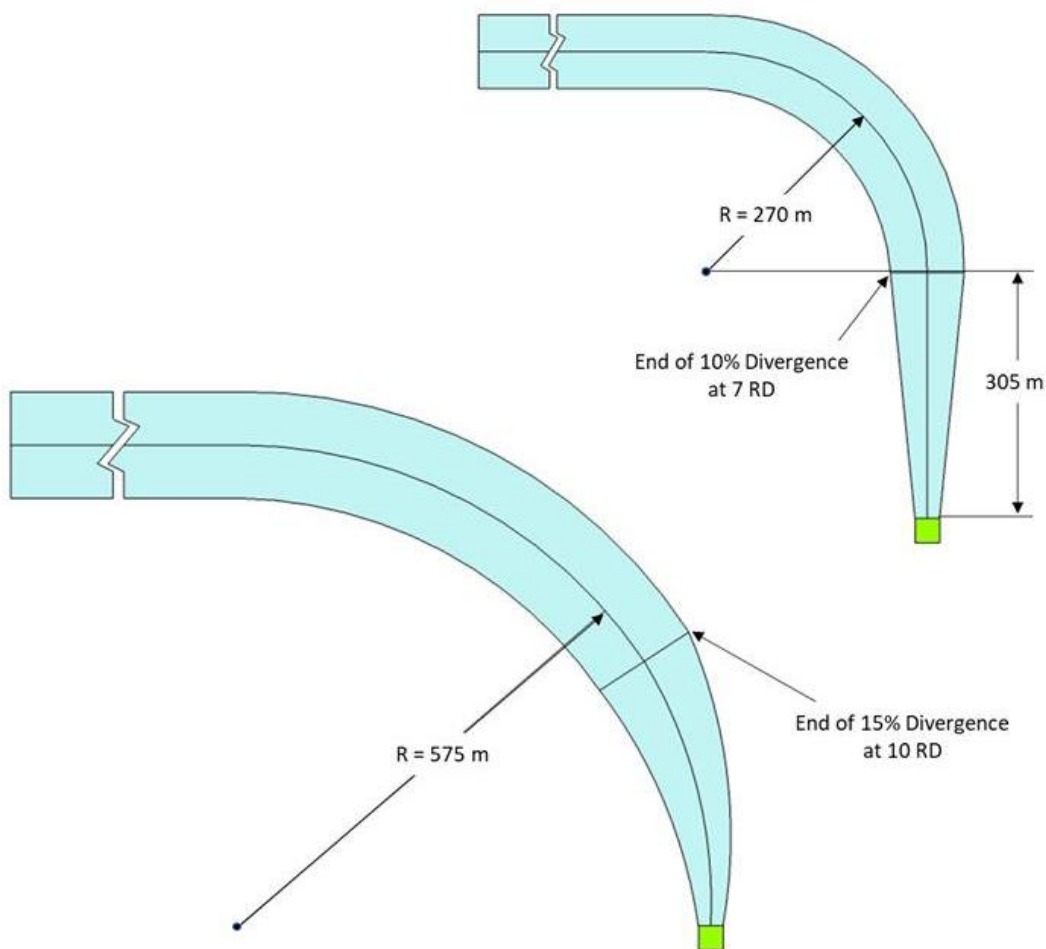


Figure 4-1. Curved approach and take-off climb surface for all FATOs

- 4.1.6. Where a curved portion of an approach surface is provided, the sum of the radius of arc defining the centre line of the approach surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.
- 4.1.7 Any variation in the direction of the centre line of an approach surface shall be designed so as not to necessitate a turn radius less than 270 m.

Note — For heliports intended to be used by helicopters operated in performance class 2 and 3, it is good practice for the approach paths to be selected so as to permit safe forced landing or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimised. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.

Transitional surface

- 4.1.8. Description: A complex surface along the side of the safety area and helicopter clearway, when provided, and part of the side of the approach or take-off climb surface, that slopes upwards and outwards to a predetermined height.
- 4.1.9. Characteristics: The limits of a transitional surface shall comprise:
- (a) a lower edge beginning at a point on the side of the approach or take-off climb surface at a specified height above the lower edge extending down the side of the approach or take-off climb surface to the inner edge and from there along the length of the side of the helicopter clearway, when provided, and safety area, parallel to the centre line of the FATO; and
 - (b) an upper edge located at:
 - 1) 45 m (150 ft) above the FATO; or
 - 2) when vertical procedures are being utilized; 15 m (50 ft) above the elevation of the upper edge of the ascent/descent surface.
- 4.1.10 The elevation of a point on the lower edge shall be:
- (a) along the side of the approach or take-off climb surface — equal to the elevation of the approach or take-off climb surface at that point; then
 - (b) if provided, along the helicopter clearway – equal to the elevation of the helicopter clearway; and
 - (c) along the safety area — equal to the elevation of the FATO.
- 4.1.11 The slope of the transitional surface shall be measured in a vertical plane at right angles to the centre line of the FATO.

Take-off climb surface

- 4.1.12 Description. An inclined plane, a combination of planes or, when a turn or turns are involved, a complex surface sloping upwards from the end of the safety area, or of the helicopter clearway, when provided, and centred on a line passing through the centre of the FATO.
- 4.1.13 Characteristics. The limits of a take-off climb surface shall comprise:
- (a) an inner edge, horizontal and perpendicular to the centre line of the take-off climb surface, with a minimum width of the width/diameter of:
 - 1) when located at the outer edge of the safety area or helicopter clearway, the FATO plus the safety area; or
 - 2) when located at the outer edge of the elevated helicopter clearway, the elevated helicopter clearway.
 - (b) two side edges originating at the ends of the inner edge and diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and
 - (c) an outer edge horizontal and perpendicular to the centre line of the take-off climb surface:

- 1) a height of 152 m (500 ft) above the elevation of the FATO; or
- 2) when a PinS departure procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.

4.1.14 The elevation of the inner edge shall be:

- a) the elevation of the FATO at the point on the inner edge that is intersected by the centre line of the take-off climb surface; or.
- b) when located at the outer edge of the helicopter clearway, the elevation of the helicopter clearway.

4.1.15 In the case of a straight take-off climb surface, the slope shall be measured in the vertical plane containing the centre line of the surface

4.1.16 In the case of a take-off climb surface involving a turn or turns, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight take-off climb surface.

Note.— See Figure 4-1. For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).

4.1.17 Where a curved portion of a take-off climb surface, that does not have its inner edge at the outer edge of a clearway, is provided, the sum of the radius of arc defining the centre line of the take-off climb surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.

Note.— Helicopter take-off performance is reduced in a turn and as such a straight portion along the take-off climb surface prior to the start of the curve allows for acceleration.

4.1.18 Any variation in the direction of the centre line of a take-off climb surface shall be designed so as not to necessitate a turn of radius less than 270 m.

Note .— For heliports intended to be used by helicopters operated in performance class 2 or 3, it is good practice for the departure paths to be selected so as to permit safe forced landings or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimized. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.

Obstacle-free sector/surface — helidecks

4.1.19 Description: A complex surface originating at and extending from, a reference point on the edge of the FATO of a helideck. In the case of a TLOF of less than 1 D, the reference point shall be located not less than 0.5 D from the centre of the TLOF.

4.1.20 Characteristics. An obstacle-free sector/surface shall subtend an arc of specified angle.

4.1.21 A helideck obstacle-free sector shall comprise of two components, one above and one below helideck level:

Note.— See Figure 4-2.

(a) Above helideck level: The surface shall be a horizontal plane level with the elevation of the helideck surface that subtends an arc of at least 210 degrees with the apex located on the periphery of the D circle extending outwards to a distance that will allow for an unobstructed departure path appropriate to the helicopter the helideck is intended to serve.

(b) Below helideck level: Within the (minimum) 210-degree arc, the surface shall additionally extend downward from the edge of the FATO below the

elevation of the helideck to water level for an arc of not less than 180 degrees that passes through the centre of the FATO and outwards to a distance that will allow for safe clearance from the obstacles below the helideck in the event of an engine failure for the type of helicopter the helideck is intended to serve.

Note — For both the above obstacle-free sectors for helicopters operated in performance class 1 or 2, the horizontal extent of these distances from the helideck will be compatible with the one-engine-inoperative capability of the helicopter type to be used.

Limited obstacle sector/surface - helidecks

Note — Where obstacles are necessarily located on the structure, a helideck may have a limited obstacle sector (LOS).

- 4.1.22 Description. A complex surface originating at the reference point for the obstacle-free sector and extending over the arc not covered by the obstacle-free sector within which the height of obstacles above the level of the TLOF will be prescribed.
- 4.1.23 Characteristics. A limited obstacle sector shall not subtend an arc greater than 150 degrees. Its dimensions and location shall be as indicated in Figure 4-3 for a 1 D FATO with coincidental TLOF and Figure 4-4 for a 0.83 D TLOF.

Note 1 — This example diagram does not represent any specific profile, technique or helicopter type and is intended to show a generic example. An approach profile and a back-up procedure for departure profile are depicted. Specific manufacturers operations in performance class 1 may be represented differently in the specific Helicopter Flight Manual. ICAO Annex 6, Part 3, Attachment A provides back-up procedures that may be useful for operations in performance class 1.

Note 2 — The approach/landing profile may not be the reverse of the take-off profile.

Note 3 — Additional obstacle assessment might be required in the area that a back-up procedure is intended. Helicopter performance and the Helicopter Flight Manual limitations will determine the extent of the assessment required.

Transitional surface

4.1.7. .

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Obstacle-free sector/surface - helidecks

~~**Note** — For both the above obstacle-free sectors for helicopters operated in performance class 1 or 2, the horizontal extent of these distances from the helideck will be compatible with the one-engine-inoperative capability of the helicopter type to be used.~~

Limited obstacle sector/surface - helidecks

~~**Note** — Where obstacles are necessarily located on the structure, a helideck may have a limited obstacle sector (LOS).~~

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

4.2. Obstacle Limitation Requirements

Note 1 — The requirements for obstacle limitation surfaces are specified on the basis of the intended use of a FATO, i.e. approach manoeuvre to hover or landing, or take-off manoeuvre and type of approach, and are intended to be applied when such use is made of the FATO. In cases where operations are conducted to or from both directions of a FATO, then the function of certain surfaces may be nullified because of more stringent requirements of another lower surface.

Note 2 — Guidance on obstacle protection surfaces, for when a visual approach slope indicator (VASI) is installed, is given in the onshore section of ICAO Heliport Manual (Doc 9261).

Note 3.— Guidance on obstacle protection surfaces, or operational limitations, when temporary obstacles are present, is given in the Heliport Manual (Doc 9261).

Onshore heliports 4.2.1. The following obstacle limitation surfaces shall be established for a FATO at heliports with a PinS approach or departure procedure with a proceed visually instruction:

- (a) take-off climb surface;
- (b) approach surface; and
- (c) transitional surfaces.

Note — ICAO Procedures for Air Navigation Services — Aircraft Operations, (PANS-OPS, Doc 8168), Volume II, Part IV — Helicopters, details procedure design criteria.

4.2.2. The following obstacle limitation surfaces shall be established for a FATO at heliports, other than specified in 4.2.1, including heliports with a PinS approach or departure procedure without a proceed visually instruction:

- (a) take-off climb surface; and
- (b) approach surface.

4.2.3. The slopes of the obstacle limitation surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 4-1.

4.2.4. Except for heliports facilitating performance class 1 operations, that have an approach/take-off climb surface with a 4.5 per cent slope design, objects shall be permitted to penetrate the obstacle limitation surface, if the results of an aeronautical study approved by an appropriate authority have reviewed the associated risks and mitigation measures.

Note 1 — The identified objects may limit the heliport operation.

Note 2 — ICAO Annex 6, Part 3, provides procedures that may be useful in determining the extent of obstacle penetration.

4.2.5. New objects or extensions of existing objects shall not be permitted above any of the surfaces in 4.2.1 and 4.2.2 except when shielded by an existing immovable object.

Note — Circumstances in which the shielding principle may reasonably be applied are described in ICAO Airport Services Manual (Doc 9137), Part 6.

4.2.6. Existing objects above any of the surfaces in 4.2.1 and 4.2.2 should, as far as practicable, be removed except when the object is shielded by an existing immovable object.

Note — The application of curved approach or take-off climb surfaces and/or the utilization of vertical procedures may alleviate the problems created by objects infringing these surfaces.

Issue 4	Revision 4	Oct. 2025	Page 47 of 121
---------	------------	-----------	----------------



- 4.2.7. A heliport should have at least two approach and take-off climb surface surfaces, separated by not less than 135°. *Note.— See the Heliport Manual (Doc 9261) for guidance.*

Table 4-1. Approach and take-off climb slope design categories

<u>Surface and dimensions</u>	Slope design categories		
	A	B	C
Approach and take-off climb surface: Length of inner edge Location of inner edge	Width of safety area Safety area boundary (Helicopter clearway boundary if provided)	Width of safety area Safety area boundary	Width of safety area Safety area boundary
Divergence: (1st and 2nd section) Day use only Night use	10% 15%	10% 15%	10% 15%
First section: Length Slope Outer width	3386 m 4.5% (1:22.2) (b)	245 m 8% (1:12.5) N/A	1220 m 12.5% (1:8) (b)
Second section: Length Slope Outer width	N/A N/A (b)	830 m 16% (1:6.25) N/A	N/A N/A (b)
Total length from inner edge (a)	3386 m _c	1075 m _c	1220 m _c
Transitional surface: Slope Height	50% (1:2) 45 m _d	50% (1:2) 45 m _d	50% (1:2) 45 m _d

- a. The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes brings the helicopter to 152 m (500 ft) above FATO elevation.
- b. Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations.
- c. This length may be reduced if vertical procedures are in place or extended/reduced if the approach or take-off climb surface is extended/reduced to meet the OCS of the PinS approach or departure procedure.
- d. See 4.1.9 b).

Note.— Guidance on the application of slope categories is provided in the Heliport Manual (Doc 9261).

FIGURE 13. HELIDECK OBSTACLE-FREE SECTOR(ICAO ANNEX14,VOL II,FIG 4.7)

4.2.8.A surface-level heliport should have at least two approach and take-off climb surfaces to avoid downwind conditions, minimise crosswind conditions and permit for a balked landing.

Note — See ICAO Heliport Manual (Doc 9261) for guidance.

Helidecks

4.2.8. A helideck shall have an obstacle-free sector.

Note — A helideck may have a LOS (see 4.1.23).

4.2.9. There shall be no fixed obstacles within the obstacle-free sector above the obstacle-free surface.

4.2.10. In the immediate vicinity of the helideck, obstacle protection for helicopters shall be provided below the helideck level. This protection shall extend over an arc of at least 180 degrees with the origin at the centre of the FATO, with a descending gradient having a ratio of one unit horizontally to five units vertically from the edges of the FATO within the 180-degree sector. This descending gradient may be reduced to a ratio of one unit horizontally to three units vertically within the 180-degree sector for multi-engine helicopters operated in performance class 1 or 2. (See Figure 4-2.)

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Note — Where there is a requirement to position, at sea surface level, one or more offshore support vessel(s) (e.g. a Standby Vessel) essential to the operation of a fixed or floating offshore facility, but located within the proximity of the fixed or floating offshore facility, any offshore support vessel(s) would need to be positioned so as not to compromise the safety of helicopter operations during take-off departure and/or approach to landing.

- 4.2.11. For a TLOF of 1 D and larger, within the 150-degree limited obstacle surface/sector out to a distance of 0.12 D measured from the point of origin of the limited obstacle sector, objects shall not exceed a height of 25 cm above the TLOF. Beyond that arc, out to an overall distance of a further 0.21 D measured from the end of the first sector, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-3.)

Note — Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4-3 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in ICAO Heliport Manual (Doc 9261).

- 4.2.12. For a TLOF less than 1 D within the 150-degree limited obstacle surface/sector out to a distance of 0.62 D and commencing from a distance 0.5 D, both measured from the centre of the TLOF, objects shall not exceed a height of 5 cm above the TLOF. Beyond that arc, out to an overall distance of 0.83 D from the centre of the TLOF, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-4.)

Note — Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4-4 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in the ICAO Heliport Manual (Doc 9261).

Shipboard heliports

- 4.2.13. The specifications in 4.2.16 and 4.2.18 shall be applicable for shipboard heliports completed on or after 1 January 2012.

Purpose-built heliports located forward or aft

- 4.2.14. When helicopter operating areas are provided in the bow or stern of a ship they shall apply the obstacle criteria for helidecks.

Amidships location — purpose-built and non-purpose-built

- 4.2.15. Forward and aft of a TLOF of 1 D and larger shall be two symmetrically located sectors, each covering an arc of 150 degrees, with their apexes on the periphery of the TLOF. Within the area enclosed by these two sectors, there shall be no objects

Issue 4	Revision 4	Oct. 2025	Page 50 of 121
----------------	-------------------	------------------	-----------------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

rising above the level of the TLOF, except those aids essential for the safe operation of a helicopter and then only up to a maximum height of 25 cm.

- 4.2.16. Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

Note — Examples of potential hazards include nets or raised fittings on the deck that might induce dynamic rollover for helicopters equipped with skids.

- 4.2.17. To provide further protection from obstacles fore and aft of the TLOF, rising surfaces with gradients of one unit vertically to five units horizontally shall extend from the entire length of the edges of the two 150-degree sectors. These surfaces shall extend for a horizontal distance equal to at least 1 D of the largest helicopter the TLOF is intended to serve and shall not be penetrated by any obstacle. (See Figure 4-5.)

Non-purpose-built heliports

Ship's side location

- 4.2.18. No objects shall be located within the TLOF except those aids essential for the safe operation of a helicopter (such as nets or lighting) and then only up to a maximum height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

4.2.19 From the fore and aft mid-points of the D circle in two segments outside the circle, limited obstacle areas shall extend to the ship's rail to a fore and aft distance of 1.5 times the fore-to-aft-dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within these areas there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF. (See Figure 17.) Such objects shall only be present if they do not represent a hazard to helicopters.

- 4.2.20 A limited obstacle sector horizontal surface shall be provided, at least 0.25 D beyond the diameter of the D circle, which shall surround the inboard sides of the TLOF to the fore and aft mid-points of the D circle. The limited obstacle sector shall continue to the ship's rail to a fore and aft distance of 2.0 times the fore-to-aft dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within this sector there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF.

Note — Any objects located within the areas described in 4.2.19 and 4.2.20 that exceed the height of the TLOF are notified to the helicopter operator using a ship's helicopter landing area plan. For notification purposes it may be necessary to consider immovable objects beyond the limit of the surface prescribed in 4.2.19 particularly if objects are significantly higher than 25 cm and in close proximity to the boundary of the LOS. See ICAO Heliport Manual (Doc 9261) for guidance.

Winching areas

- 4.2.21 An area designated for winching on-board ships shall be comprised of a circular clear zone of diameter 5 m and extending from the perimeter of the clear zone, a concentric manoeuvring zone of diameter 2 D. (See Figure 4-7.)

- 4.2.22 The manoeuvring zone shall be comprised of two areas:

a) the inner manoeuvring zone extending from the perimeter of the clear zone and of a circle of diameter not less than 1.5 D; and

Issue 4	Revision 4	Oct. 2025	Page 51 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

b) the outer manoeuvring zone extending from the perimeter of the inner manoeuvring zone and of a circle of diameter not less than 2 D.

4.2.23 Within the clear zone of a designated winching area, no objects shall be located above the level of its surface.

4.2.24 Objects located within the inner manoeuvring zone of a designated winching area shall not exceed a height of 3 m.

4.2.25 Objects located within the outer manoeuvring zone of a designated winching area shall not exceed a height of 6 m.

Note.— See the *Heliport Manual (Doc 9261)* for guidance.

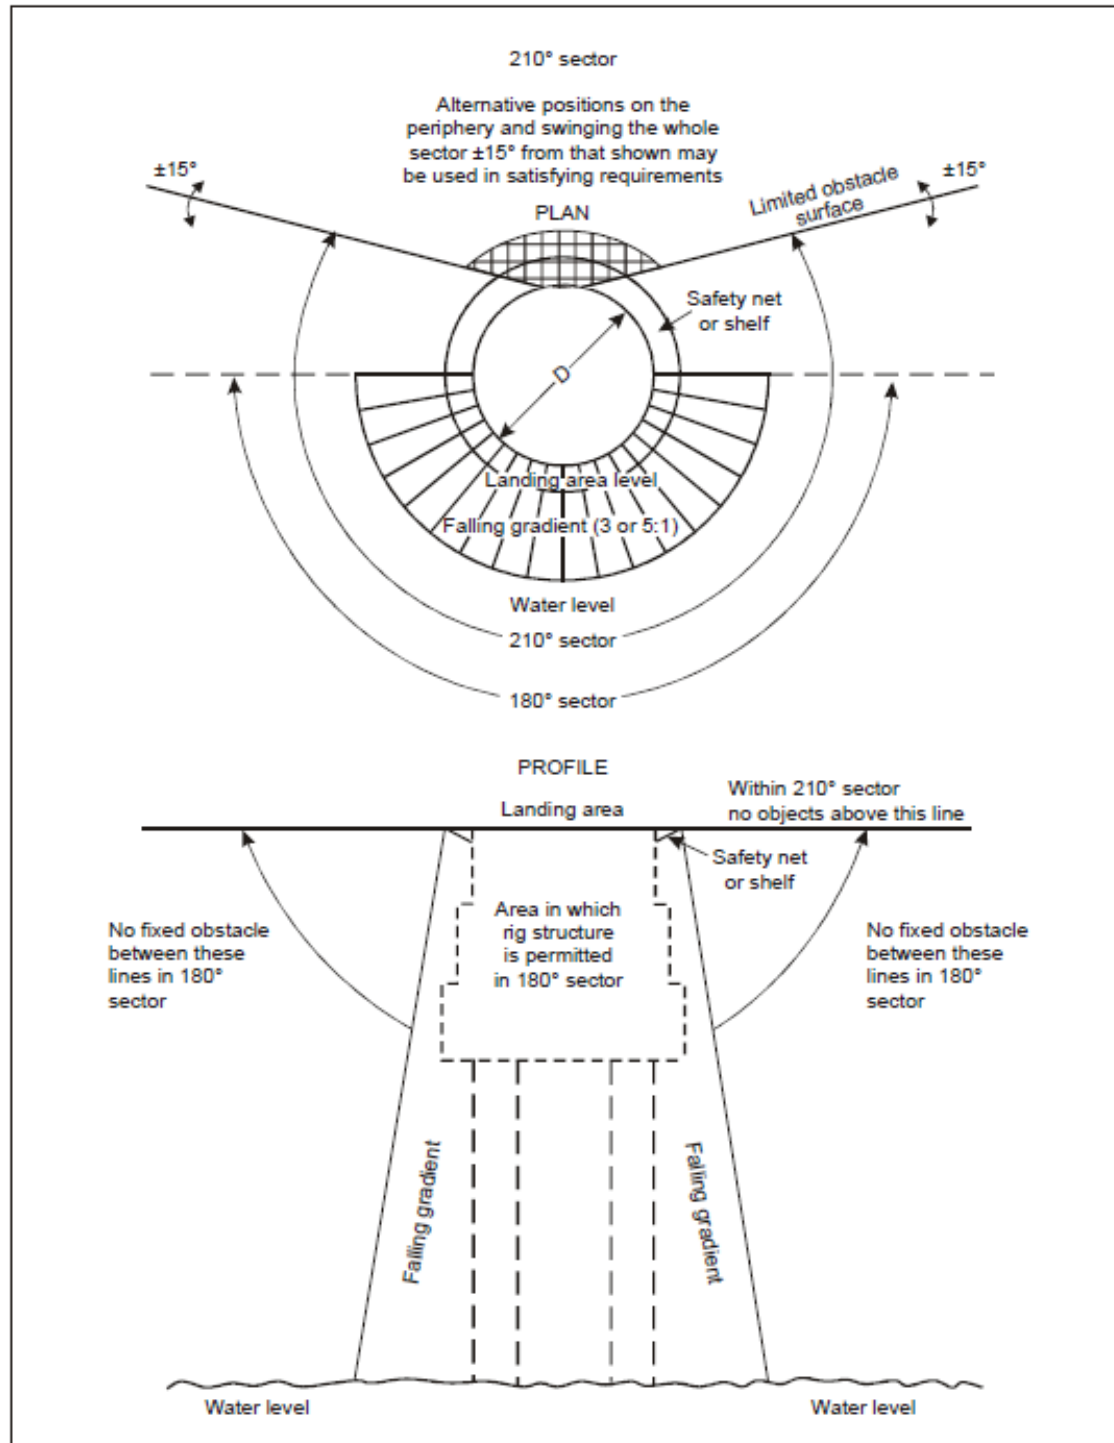
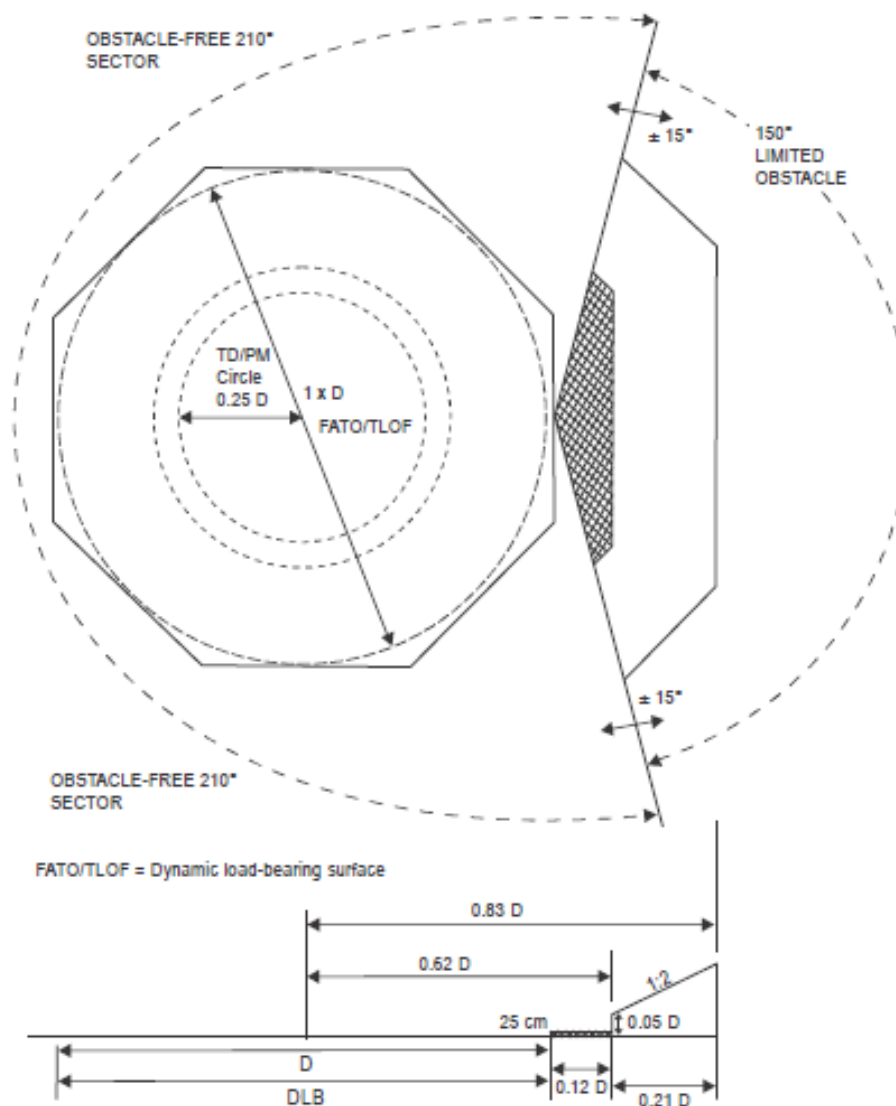
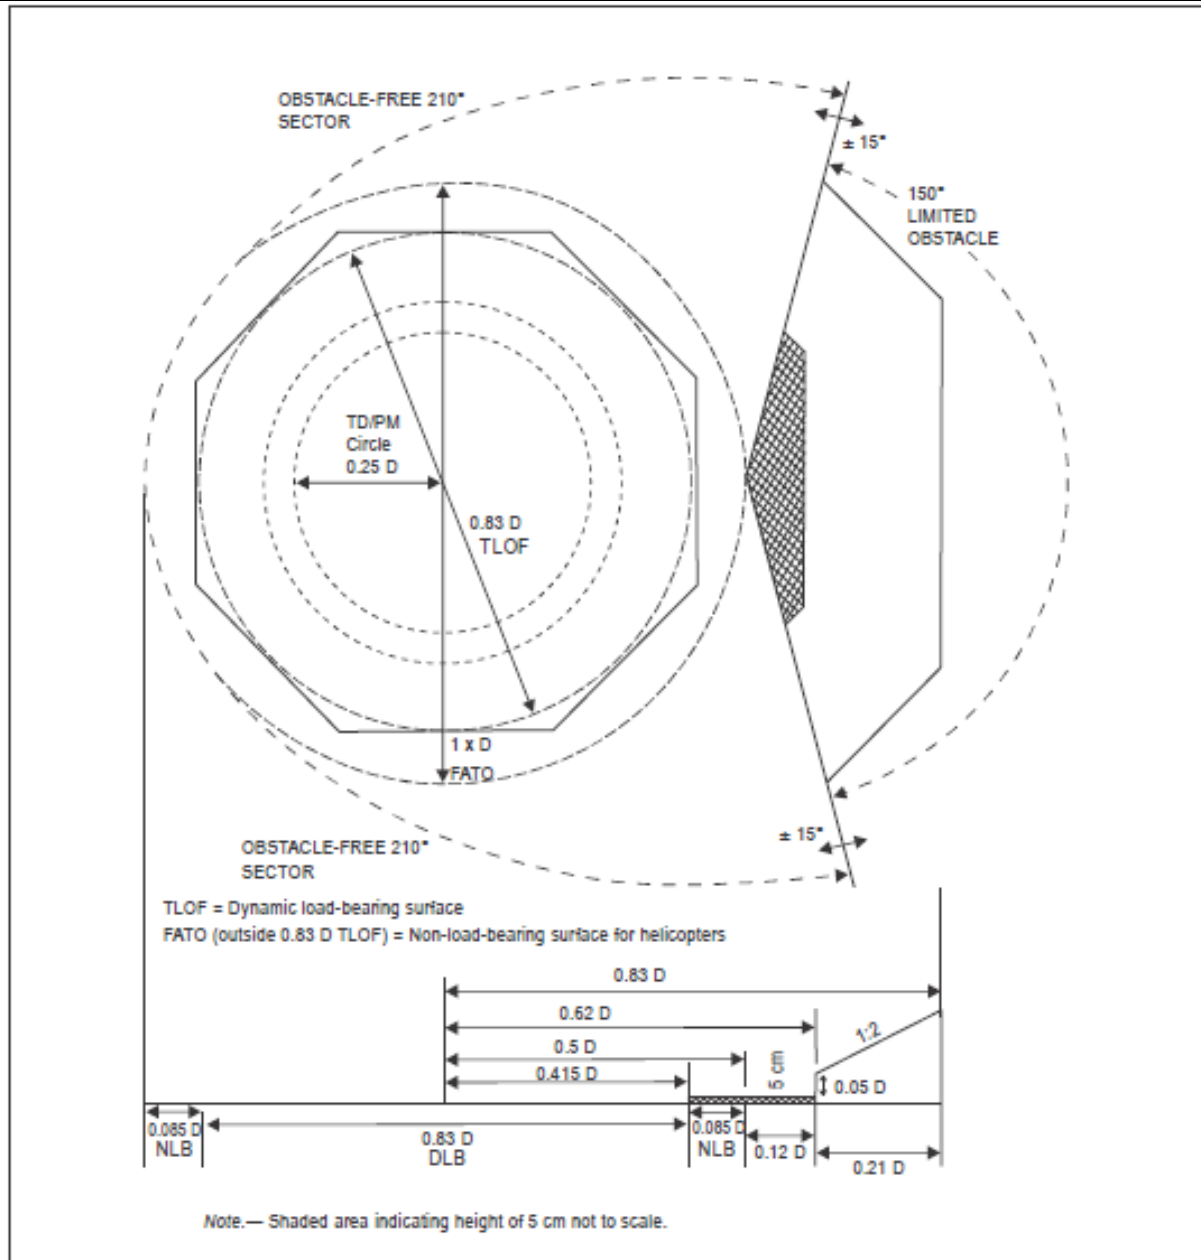


Figure 4-2. Helideck obstacle-free sector



**Figure 4-3. Helideck obstacle limitation sectors and surfaces
for a FATO and coincidental TLOF of 1 D and larger**



**Figure 4-4. Helideck obstacle limitation sectors
and surfaces for a TLOF of 0.83 D and larger**

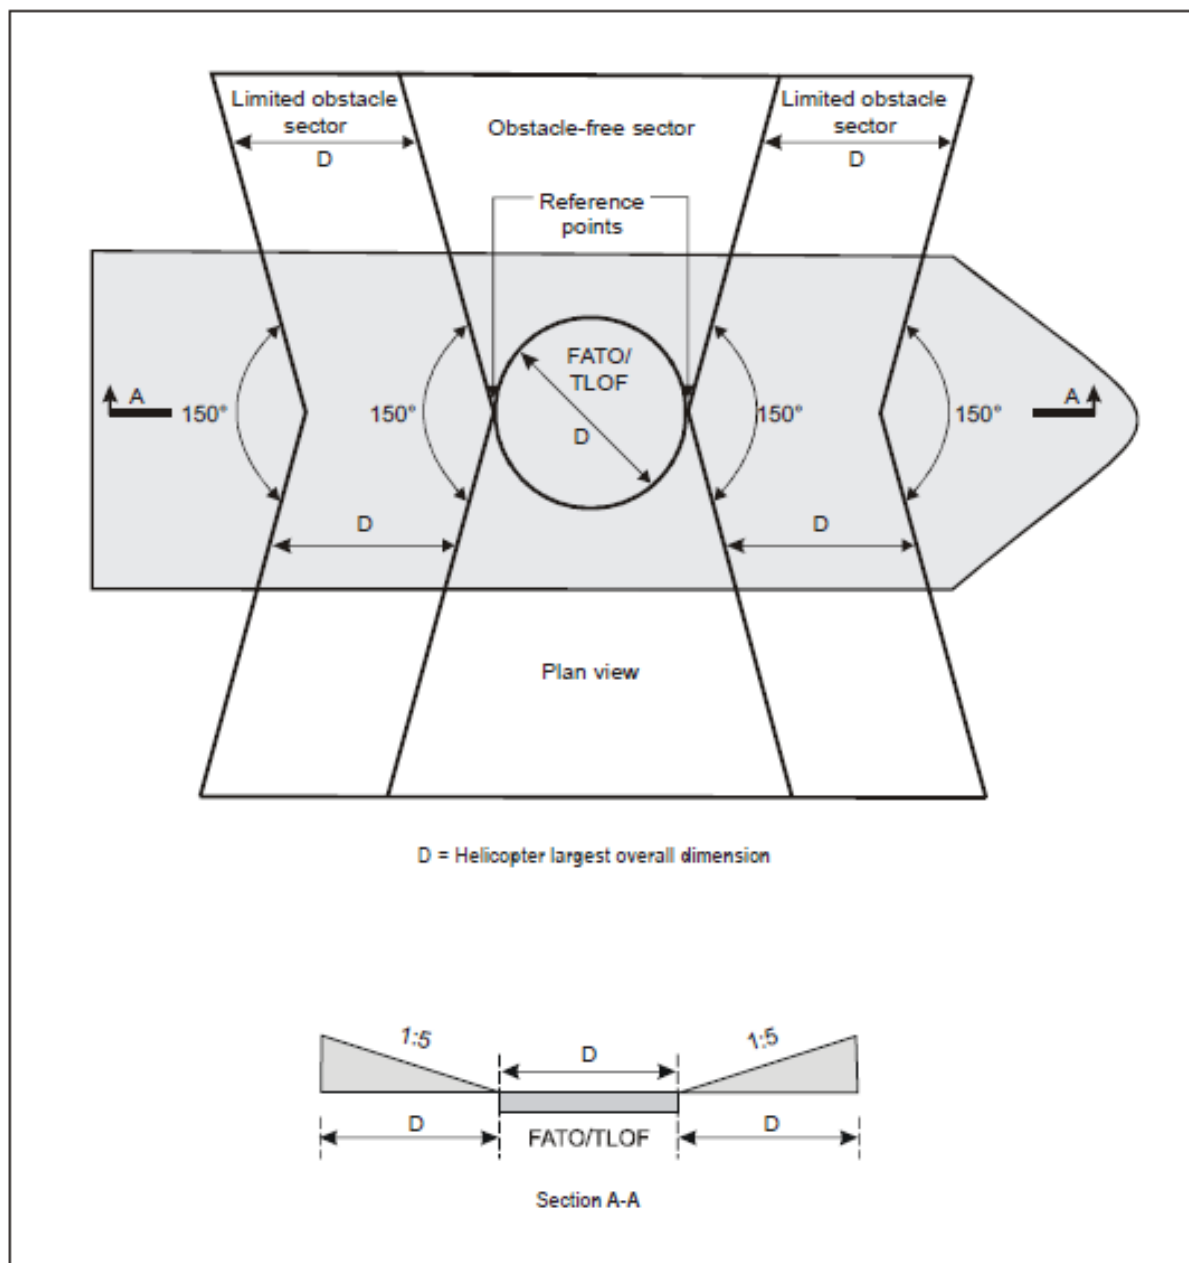
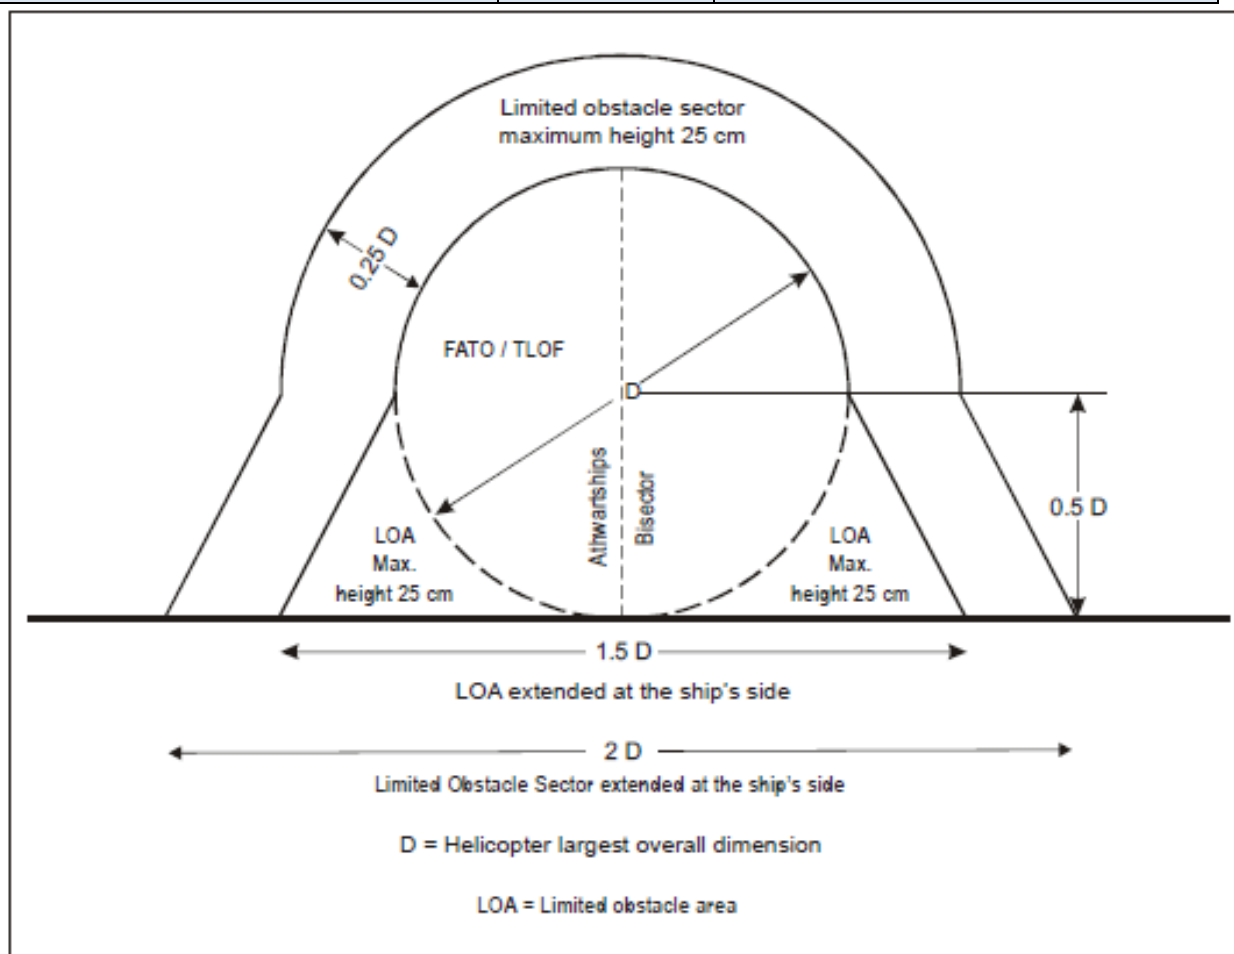


Figure 4-5. Amidship's location — shipboard heliport obstacle limitation surfaces



**Figure 4-6. Ships-side non-purpose-built heliport
obstacle limitation sectors and surfaces**

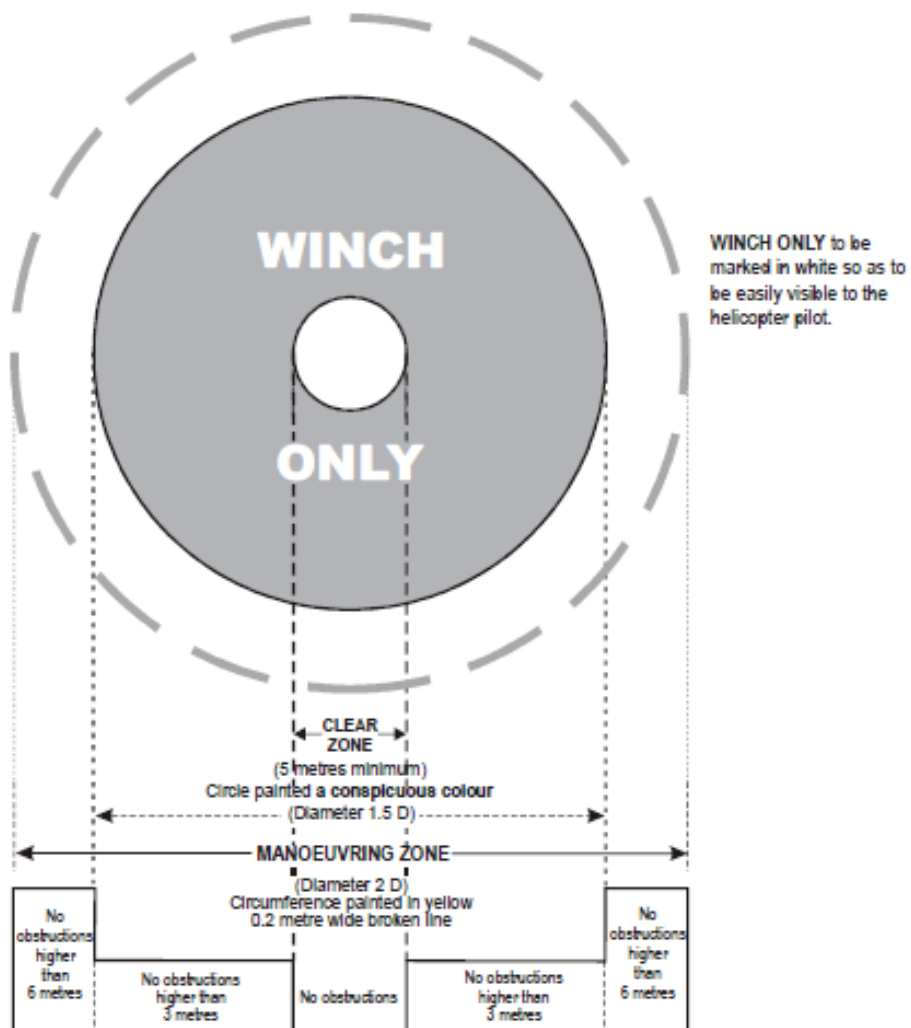


Figure 4-7. Winching area of a ship

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

4.2.23. ~~From the fore and aft mid-points of the D circle in two segments outside the circle, limited obstacle areas shall extend to the ship's rail to a fore and aft distance of 1.5 times the fore-to-aft dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within these areas there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF. (See Figure 17.) Such objects shall only be present if they do not represent a hazard to helicopters.~~

4.2.24. ~~A limited obstacle sector horizontal surface shall be provided, at least 0.25 D beyond the diameter of the D circle, which shall surround the inboard sides of the TLOF to the fore and aft mid-points of the D circle. The limited obstacle sector shall continue to the ship's rail to a fore and aft distance of 2.0 times the fore-to-aft dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within this sector there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF.~~

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Winching areas

4.2.25

4.2.26

~~b) the outer manoeuvring zone extending from the perimeter of the inner manoeuvring zone and of a circle of diameter~~

~~not less than 2 D.~~

4.2.27

4.2.28

~~3 m.~~

4.2.29 ~~Objects located within the outer manoeuvring zone of a designated winching area shall not exceed a height of~~

~~6 m.~~

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Chapter 5. Visual Aids

Note 1 — The procedures used by some helicopters require that they utilize a FATO having characteristics similar in shape to a runway for fixed wing aircraft. For the purpose of this chapter a FATO having characteristics similar in shape to a runway is considered as satisfying the concept for a “runway-type FATO”. For such arrangements it is sometimes necessary to provide specific markings to enable a pilot to distinguish a runway-type FATO during an approach. Appropriate markings are contained within sub-sections entitled “Runway-type FATOs”. The requirements applicable to all other types of FATOs are given within sub-sections entitled “All FATOs except runway-type FATOs”.

Note 2 — It has been found that, on surfaces of light colour, the conspicuity of white and yellow markings can be improved by outlining them in black.

Note 3 — Guidance is given in ICAO Heliport Manual (Doc 9261) on marking the maximum allowable mass (5.2.3) and the D-value (5.2.4) on the heliport surface to avoid confusion between markings where metric units are used and markings where imperial units are used.

Note 4 — For a non-purpose-built heliport located on a ship’s side the surface colour of the main deck can vary from ship to ship and therefore some discretion may need to be exercised in the colour selection of heliport paint schemes; the objective being to ensure that the markings are conspicuous against the surface of the ship and the operating background.

5.1 Indicators

5.1.1. Wind direction indicators

Application

5.1.1.1. A heliport shall be equipped with at least one wind direction indicator.

Location

5.1.1.2. A wind direction indicator shall be located so as to indicate the wind conditions over the FATO and TLOF and in such a way as to be free from the effects of airflow disturbances caused by nearby objects or rotor downwash. It shall be visible from a helicopter in flight, in a hover or on the movement area.

5.1.1.3. Where a TLOF and/or FATO may be subject to a disturbed airflow, then additional wind direction indicators located close to the area should be provided to indicate the surface wind on the area.

Note — Guidance on the location of wind direction indicators is given in ICAO Heliport Manual (Doc 9261).

Characteristics

5.1.1.4. A wind direction indicator shall be constructed so that it gives a clear indication of the direction of the wind and a general indication of the wind speed.

5.1.15 An indicator should be a truncated cone made of lightweight fabric and should have the following minimum dimensions:

	Surface-level Heliports	Elevated heliports and helidecks
<i>Length</i>	2.4 m	1.2 m
<i>Diameter (larger end)</i>	0.6 m	0.3 m
<i>Diameter (smaller end)</i>	0.3 m	0.15 m

5.1.1.6 *The colour of the wind direction indicator should be so selected as to make it clearly visible and understandable from a height of at least 200 m (650 ft) above the heliport, having regard to background. Where practicable, a single colour, preferably white or orange, should be used. Where a combination of two colours is required to give adequate conspicuity against changing backgrounds, they should preferably be orange and white, red and white, or black and white, and should be arranged in five alternate bands the first and last band being the darker colour.*

5.1.1.7 A wind direction indicator at a heliport intended for use at night shall be illuminated.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2. Markings and markers

Note — See ICAO Annex 14, Volume I, 5.2.1.4, Note 1, concerning improving conspicuity of markings.

5.2.1. Winching area marking

Note.— The objective of the winching area markings is to provide visual cues which assist a helicopter to be positioned over, and retained within, an area from which a passenger or equipment can be lowered or raised.

Application

5.2.1.1 Winching area markings shall be provided at a designated winching area. (See Figure 18.)

Location

5.2.1.2 Winching area markings shall be located so that their centre(s) coincides with the centre of the clear zone of the winching area. (See Figure 18.)

Characteristics

5.2.1.3 Winching area markings shall comprise a winching area clear zone marking and a winching area manoeuvring zone marking.

5.2.1.4 A winching area clear zone marking shall consist of a solid circle of diameter not less than 5 m and of a conspicuous colour.

5.2.1.5 A winching area manoeuvring zone marking shall consist of a broken circle line of 30 cm in width and of a diameter not less than 2 D and be marked in a conspicuous colour. Within it “WINCH ONLY” shall be marked to be easily visible to the pilot.

5.2.2. Heliport identification marking

Note 1.— The objective of a heliport identification marking is to provide to the pilot an indication of the presence of a heliport and, by its form, likely usage; the preferred direction(s) of approach; or the FATO orientation within the helideck obstacle environment.

Note 2.— For other than helidecks, the preferred direction(s) of approach corresponds to the median of the departure/arrival surface(s).

Note 3.— For helidecks, the bar of the “H” points to the centre of the Limited Obstacle Sector.

Note 4.— If the touchdown/positioning marking is offset, the heliport identification marking is established in the centre of the touchdown/positioning marking.

Note 5.— On a FATO, which does not contain a TLOF and which is marked with an aiming point marking (see 5.2.7), the heliport identification marking is established in the centre of the aiming point marking as shown in Figures 5-1 and 5-1A.

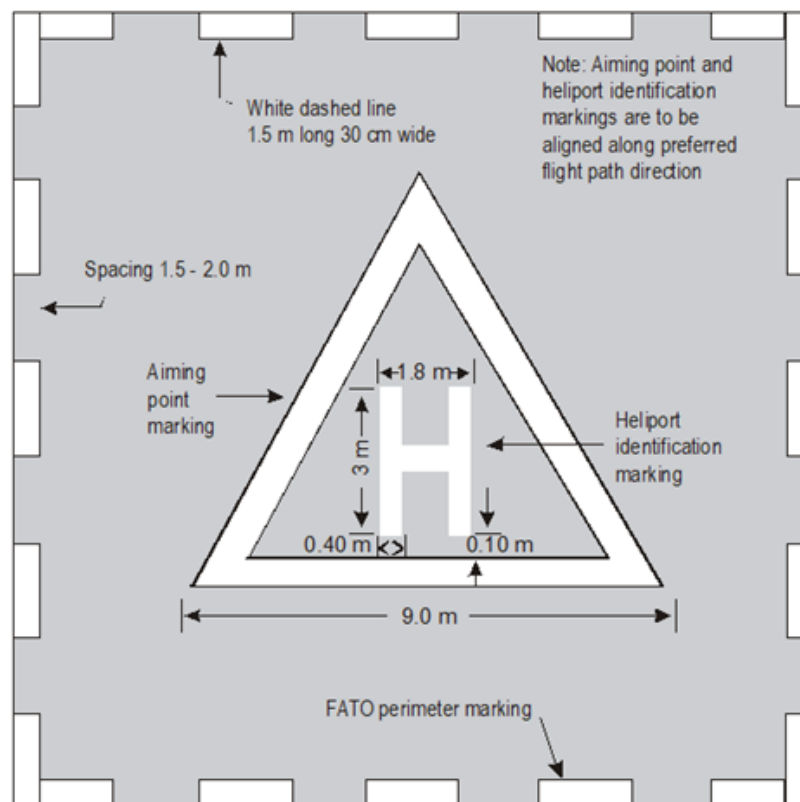


Illustration is not to scale.

Note: The aiming point, heliport identification and FATO perimeter markings are white and may be edged with a 10 cm black border to improve contrast

Figure 5-1. Combined heliport identification, aiming point and FATO perimeter marking

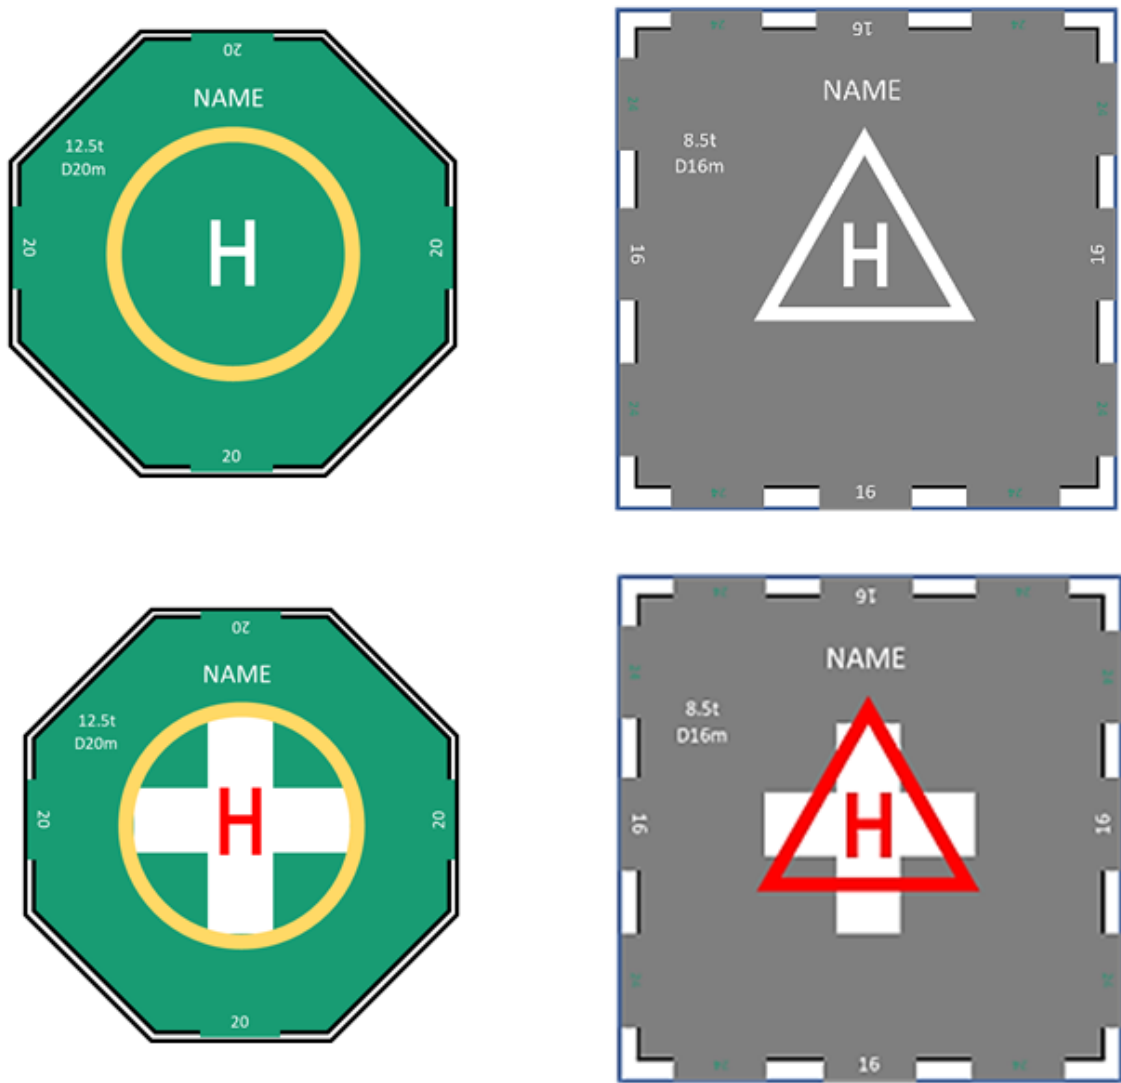


Figure 5-1A. Heliport identification markings with TLOF and aiming markings for heliport and hospital heliport

Application

5.2.2.1 Heliport identification markings shall be provided at a heliport.

Location — All FATOs except runway-type FATOs

5.2.2.2 A heliport identification marking shall be located at or near the centre of the FATO.

Note 1 — If the touchdown/positioning marking is offset on a helideck, the heliport identification marking is established in the centre of the touchdown/positioning marking.

Note 2 — On a FATO, which does not contain a TLOF and which is marked with an aiming point marking (see 5.2.8), except for a heliport at a hospital, the heliport identification marking is established in the centre of the aiming point marking as shown in Figure 19.

5.2.2.3 On a FATO which contains a TLOF, a heliport identification marking shall be located in the FATO so the position of it coincides with the centre of the TLOF.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Location — Runway-type FATOs

- 5.2.2.4 A heliport identification marking shall be located in the FATO and when used in conjunction with FATO designation markings, shall be displayed at each end of the FATO as shown in Figure 19.

Characteristics

- 5.2.2.5 A heliport identification marking, except for a heliport at a hospital, shall consist of a letter H, white in colour. The dimensions of the H marking shall be no less than those shown in Figure 21 and where the marking is used for a runway-type FATO, its dimensions shall be increased by a factor of 3 as shown in Figure 20.
- 5.2.2.6 A heliport identification marking for a heliport at a hospital shall consist of a letter H, red in colour, on a white cross made of squares adjacent to each of the sides of a square containing the H as shown in Figure 21.
- 5.2.2.7 A heliport identification marking shall be oriented with the cross arm of the H at right angles to the preferred final approach direction. For a helideck the cross arm shall be on or parallel to the bisector of the obstacle-free sector. For a non-purpose-built shipboard heliport located on a ship's side, the cross arm shall be parallel with the side of the ship.
- 5.2.2.8 On a helideck or a shipboard heliport where the D value is 16.0 m or larger, the size of the heliport identification H marking should have a height of 4 m with an overall width not exceeding 3 m and a stroke width not exceeding 0.75 m. Where the D value is less than 16.0 m, the size of the heliport identification H marking should have a height of 3 m with an overall width not exceeding 2.25 m and a stroke width not exceeding 0.5 m.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports


5.2.3. Maximum allowable mass marking

Note 1.— The objective of the maximum allowable mass marking is to provide the mass limitation of the heliport such that it is visible to the pilot from the preferred final approach direction.

Note 2.— Where States express the maximum allowable mass in pounds, it is not appropriate to suffix with the letter “t” which is used only to indicate metric tonnes. Guidance on markings where States use imperial units is given in ICAO Heliport Manual (Doc 9261).

Application

- 5.2.3.1 A maximum allowable mass marking shall be displayed at an elevated heliport, a helideck and a shipboard heliport.

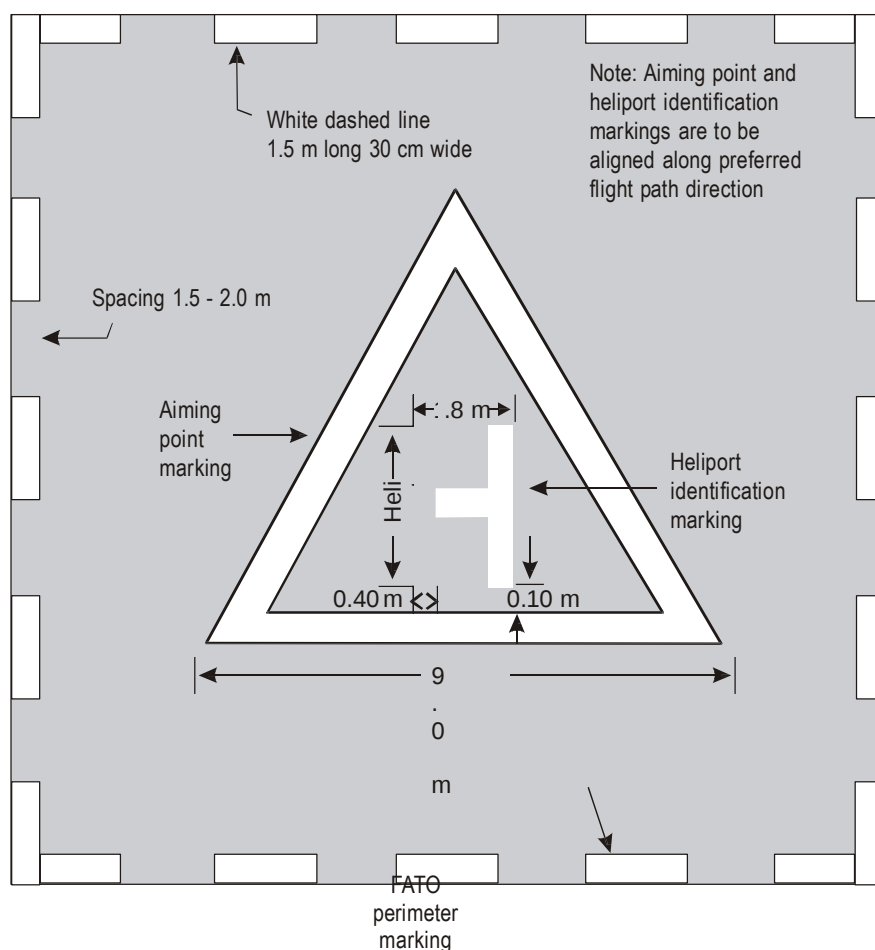

Missing diagram

Note: The aiming point, heliport identification and FATO perimeter markings are white and may be edged with a 10 cm black border to improve contrast

Figure 19. Combined heliport identification, aiming point and FATO perimeter marking
(ICAO Annex 14, Vol II, Fig. 5-1)

5.2.3.2 A maximum allowable mass marking should be displayed at a surface-level heliport.

Location

5.2.3.3 A maximum allowable mass marking should be located within the TLOF or FATO and so arranged as to be readable from the preferred final approach direction.

Characteristics

5.2.3.4 A maximum allowable mass marking shall consist of a one-, two- or three-digit number.



Figure 20. FATO designation marking and heliport identification marking for a runway-type FATO (ICAO Annex 14, Vol. II, Fig. 5-2)

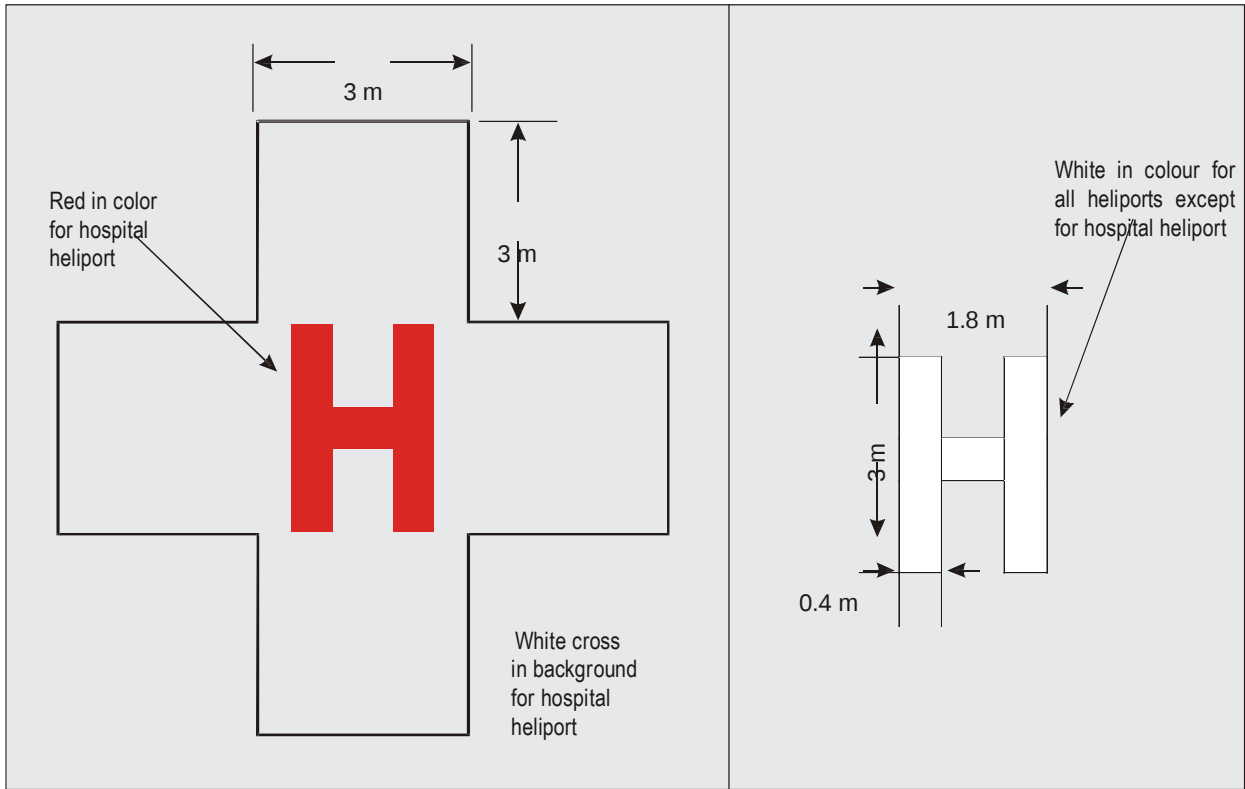


Figure 21. Hospital heliport identification and heliport identification marking (ICAO Annex 14, Vol. II, Fig. 5-3)

5.2.3.5 The maximum allowable mass shall be expressed in tonnes (1000 kg) rounded down to the nearest 1000 kg followed by a letter “t”. Where States use mass in pounds, the maximum allowable mass marking shall indicate the allowable helicopter mass in thousands of pounds rounded down to the nearest 1000 lbs.

Note — Where States express the maximum allowable mass in pounds, it is not appropriate to suffix with the letter “t” which is used only to indicate metric tonnes. Guidance on markings where States use imperial units is given in ICAO Heliport Manual (Doc 9261).

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

- 5.2.3.6 *The maximum allowable mass should be expressed to the nearest 100 kg. The marking should be presented to one decimal place and rounded to the nearest 100 kg followed by the letter “t”. Where States use mass in pounds, the maximum allowable mass marking should indicate the allowable helicopter mass in hundreds of pounds rounded to the nearest 100 lb.*
- 5.2.3.7 *When the maximum allowable mass is expressed to 100 kg, the decimal place should be preceded with a decimal point marked with a 30 cm square.*

All FATOs except runway-type FATOs

- 5.2.3.8 *The numbers and the letter of the marking should have a colour contrasting with the background and should be in the form and proportion shown in Figure 5-4 for D-value of more than 30 m. For a D-value between 15 m to 30 m the height of the numbers and the letter of the marking should be a minimum of 90 cm, and for a D-value of less than 15 m the height of the numbers and the letter of the marking should be a minimum of 60 cm, each with a proportional reduction in width and thickness.*

Runway-type FATOs

- 5.2.3.9 *The numbers and the letter of the marking should have a colour contrasting with the background and should be in the form and proportion shown in Figure 5-4.*

5.2.4. D-value marking

Note.— The objective of the D-value marking is to provide to the pilot the “D” of the largest helicopter that can be accommodated on the heliport. This value may differ in size from the FATO and the TLOF provided in compliance with Chapter 3.

Application

All FATOs except runway-type FATOs

- 5.2.4.1 The D-value marking shall be displayed at a helideck and at a shipboard heliport.

Runway-type FATOs


Note — The D-value is not required to be marked on a heliport with a runway-type FATO.

- 5.2.4.2 The D-value marking shall be displayed at surface-level and elevated heliports.

Location

- 5.2.4.3 A D-value marking shall be located within the TLOF or FATO and so arranged as to be readable from the preferred final approach direction.
- 5.2.4.4 *Where there is more than one approach direction, additional D-value markings should be provided such that at least one D-value marking is readable from the final approach directions. For a non-purpose-built heliport located on a ship’s side, D-value markings should be provided on the perimeter of the D circle at the 2 o’clock, 10 o’clock and 12 o’clock positions when viewed from the side of the ship facing towards the centre line.*

Issue 4	Revision 4	Oct. 2025	Page 70 of 121
----------------	-------------------	------------------	-----------------------

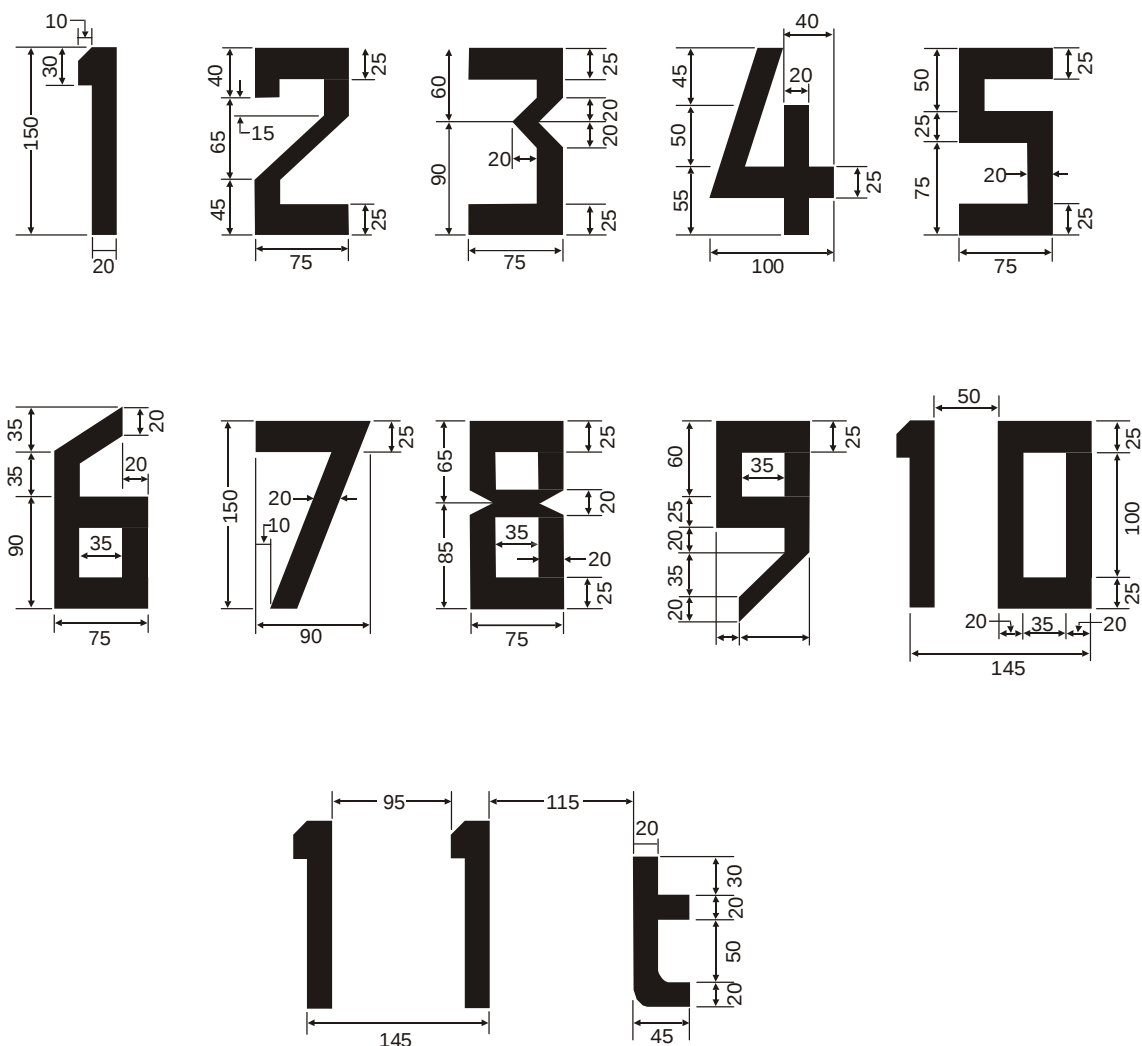

Note.— All units are expressed in centimetres.

Figure 22 Form and proportions of numbers and letters.
(ICAO Annex 14, Vol. II, Fig. 5-4)

Characteristics

- 5.2.4.5 The D-value marking shall be white. The D-value marking shall be rounded to the nearest whole metre or foot with 0.5 rounded down.
- 5.2.4.6 *The numbers of the marking should have a colour contrasting with the background and should be in the form and proportion shown in Figure 22 for a D-value of more than 30 m. For a D-value with a dimension of between 15 m to 30 m the height of the numbers of the marking should be a minimum of 90 cm, and for a D-value of less than 15 m the height of the numbers of the marking should be a minimum of 60 cm, each with a proportional reduction in width and thickness.*

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2.5. Final approach and take-off area perimeter marking or markers for surface-level heliports

Note.— The objective of final approach and take-off area perimeter marking, or markers, is to provide to the pilot, where the perimeter of the FATO is not self-evident, an indication of the area that is free of obstacles and in which intended procedures, or permitted manoeuvring, may take place.

Application

- 5.2.5.1 FATO perimeter marking or markers shall be provided at a surface-level heliport where the extent of a FATO with a solid surface is not self-evident.

Location

- 5.2.5.2 The FATO perimeter marking or markers shall be located on the edge of the FATO.

Characteristics — Runway-type FATOs

- 5.2.5.3 The perimeter of the FATO shall be defined with markings or markers spaced at equal intervals of not more than 50 m with at least three markings or markers on each side including a marking or marker at each corner.
- 5.2.5.4 A FATO perimeter marking shall be a rectangular stripe with a length of 9 m or one-fifth of the side of the FATO which it defines and a width of 1 m.
- 5.2.5.5 FATO perimeter markings shall be white.
- 5.2.5.6 A FATO perimeter marker shall have dimensional characteristics as shown in Figure 23.
- 5.2.5.7 FATO perimeter markers shall be of colour(s) that contrast effectively against the operating background.
- 5.2.5.8 *FATO perimeter markers should be a single colour, orange or red, or two contrasting colours, orange and white or, alternatively, red and white should be used except where such colours would merge with the background.*

Characteristics — All FATOs except runway-type FATOs

- 5.2.5.9 For an unpaved FATO the perimeter shall be defined with flush in-ground markers. The FATO perimeter markers shall be 30 cm in width, 1.5 m in length, and with end-to-end spacing of not less than 1.5 m and not more than 2 m. The corners of a square or rectangular FATO shall be defined.
- 5.2.5.10 For a paved FATO the perimeter shall be defined with a dashed line. The FATO perimeter marking segments shall be 30 cm in width, 1.5 m in length, and with end-to-end spacing of not less than 1.5 m and not more than 2 m. The corners of the square or rectangular FATO shall be defined.
- 5.2.5.11 FATO perimeter markings and flush in-ground markers shall be white.

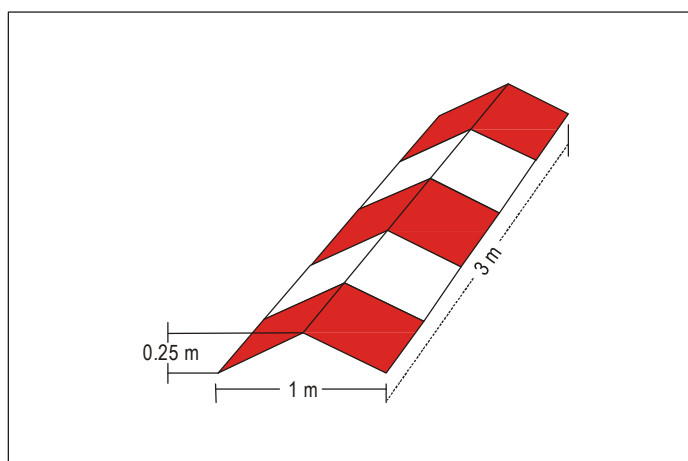


Figure 23. Runway-type FATO edge marker
(ICAO Annex 14, Vol II, Fig. 5-5)

5.2.6. Final approach and take-off area designation markings for runway-type FATOs

Note.— The objective of final approach and take-off area designation markings for runway-type FATOs is to provide to the pilot an indication of the magnetic heading of the runway.

Application

- 5.2.6.1 A FATO designation marking should be provided at a heliport where it is necessary to designate the FATO to the pilot.

Location

- 5.2.5.2 A FATO designation marking shall be located at the beginning of the FATO as shown in Figure 20.

Characteristics

- 5.2.6.3 A FATO designation marking shall consist of a two-digit number. The two-digit number shall be the whole number nearest the one-tenth of the magnetic North when viewed from the direction of approach. When the above rule would give a single digit number, it shall be preceded by a zero. The marking as shown in Figure 20, shall be supplemented by the heliport identification marking.

5.2.7. Aiming point marking

Note.— The objective of the aiming point marking is to provide a visual cue indicating to the pilot the preferred approach/departure direction; the point to which the helicopter approaches to the hover before positioning to a stand where a touchdown can be made; and that the surface of the FATO is not intended for touchdown.

Application

- 5.2.7.1 An aiming point marking should be provided at a heliport where it is necessary for a pilot to make an approach to a particular point above a FATO before proceeding to a TLOF.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Location — Runway-type FATOs

5.2.7.2 The aiming point marking shall be located within the FATO.

Location — All FATOs except runway-type FATOs

5.2.7.3 The aiming point marking shall be located at the centre of the FATO as shown in Figure 5-1.

Characteristics

5.2.7.4 The aiming point marking shall be an equilateral triangle with the bisector of one of the angles aligned with the preferred approach direction. The marking shall consist of continuous lines providing a contrast with the background colour, and the dimensions of the marking shall conform to those shown in Figure 24.

5.2.8. Touchdown and lift-off area perimeter marking

Application

5.2.8.1 A TLOF perimeter marking shall be displayed on a TLOF located in a FATO at a surface-level heliport if the perimeter of the TLOF is not self-evident.

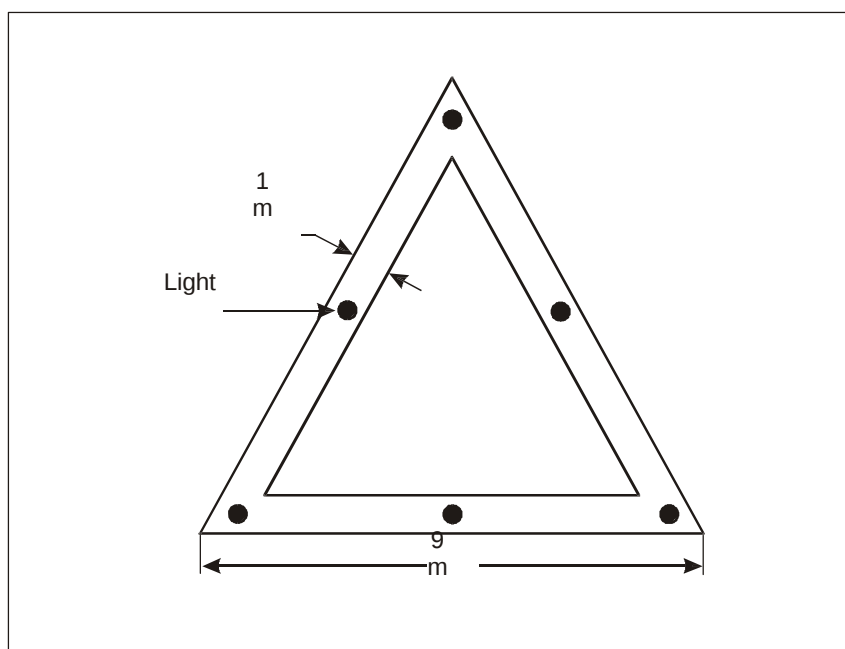


Figure 24. Aiming point marking
(ICAO Annex 14 Vol II, Fig 5-6)

5.2.8.2 A TLOF perimeter marking shall be displayed on an elevated heliport, a helideck and a shipboard heliport.

Location

5.2.8.3 The TLOF perimeter marking shall be located along the edge of the TLOF.

Characteristics

5.2.8.4 A TLOF perimeter marking shall consist of a continuous white line with a width of at least 30 cm.


5.2.9. Touchdown/positioning marking

Note.— The objective of a touchdown/positioning marking (TDPM) is to provide visual cues which permit a helicopter to be placed in a specific position such that, when the pilot's seat is above the marking, the undercarriage is within the load-bearing area and all parts of the helicopter will be clear of any obstacles by a safe margin.

5.2.9.1 A touchdown/positioning marking shall be provided for a helicopter to touch down or be accurately placed in a specific position.

5.2.9.2 The touchdown/positioning marking shall be:

- a) when there is no limitation on the direction of touchdown/positioning, a touchdown/positioning circle (TDPC) marking; and
- b) when there is a limitation on the direction of touchdown/positioning:
 - 1) for unidirectional applications, a shoulder line with an associated centreline; or
 - 2) for multidirectional applications, a TDPC marking with prohibited landing sector(s) marked.

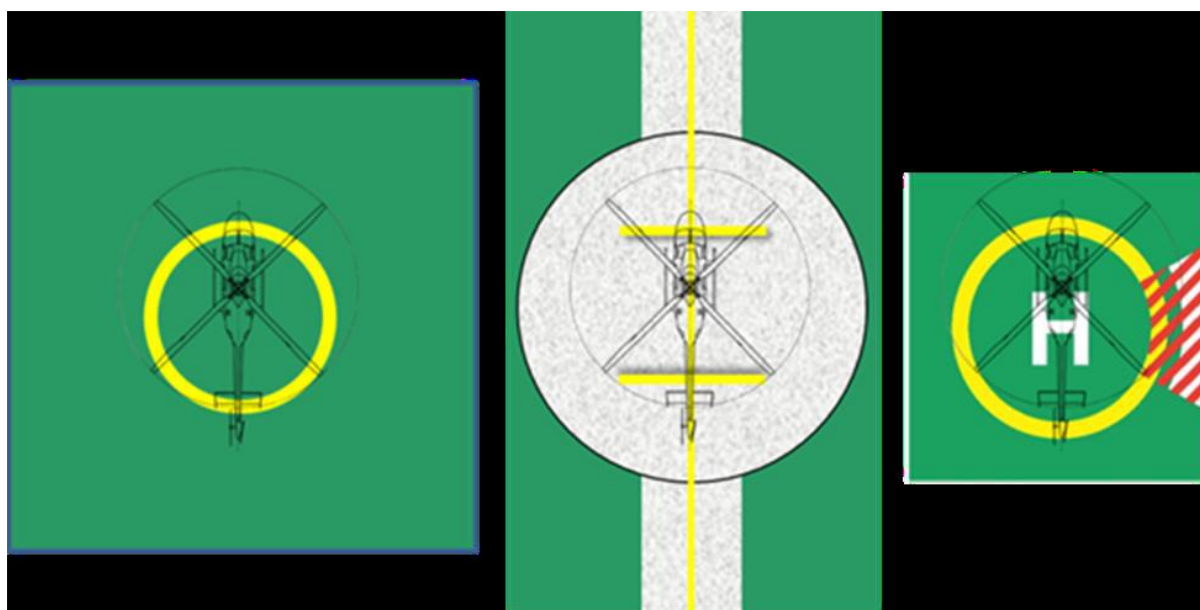

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Figure 5-7. (Left) multidirectional TDPC with no limitations. (Centre) unidirectional marking shoulder line with associated centreline. (Right) multidirectional TDPC with prohibited landing sector marking

Note.— The prohibited landing sector (PLS) marking, when provided, is not intended to move the helicopter away from objects around the FATO, but to ensure that the tail is not placed in an orientation that might constitute a hazard. This is achieved by having the helicopter nose clear of the hatched markings during the touchdown.

Location

- 5.2.9.3 The inner edge/inner circumference of the touchdown/positioning marking shall be at a distance of 0.25 D from the centre of the area in which the helicopter is to be positioned.
- 5.2.9.4 On a helideck, the centre of the TDPC marking shall be located at the centre of the FATO, except that the marking may be offset away from the origin of the obstacle-free sector by no more than 0.1 D where an aeronautical study indicates such offsetting is necessary and would not impair safety.
- 5.2.9.5 Prohibited landing sector markings, when provided, shall be located on the touchdown/positioning marking, within the relevant headings, and extend to the inner edge of the TLOF perimeter marking.

Characteristics

- 5.2.9.6 The inner diameter of the TDPC shall be 0.5 D of the largest helicopter the area is intended to serve.
- 5.2.9.7 A touchdown/positioning marking shall have a line width of at least 0.5 m. For a helideck and a purpose-built shipboard heliport, the line width shall be at least 1 m.
- 5.1.2. 5.2.9.8 The length of a shoulder line shall be 0.5D of the largest helicopter the area is intended to serve.
- 5.1.3. 5.2.9.9 The prohibited landing sector markings, when provided, shall be indicated by white and red hatched markings as shown in Figure 5-7.
- 5.2.9.10 The TDPM shall take precedent when used in conjunction with other markings on the TLOF except for the prohibited landing sector marking.

5.2.10. Heliport name marking

Application

- 5.2.10.1 *A heliport name marking should be provided at a heliport and helideck where there is insufficient alternative means of visual identification.*

Location

- 5.2.10.2 Where a obstacle sector (LOS) exists on a helideck the marking shall be located on that side of the “heliport identification marking”. For a non-purpose-built heliport located on a ship’s side the marking should be located on the inboard side of the heliport identification marking in the area between the TLOF perimeter marking and the boundary of the LOS.

Characteristics

Issue 4	Revision 4	Oct. 2025	Page 76 of 121
----------------	-------------------	------------------	-----------------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2.10.3 A heliport name marking shall consist of the name or the alphanumeric designator of the heliport as used in the radio (R/T) communications.

5.2.10.4 A heliport name marking intended for use at night or during conditions of poor visibility should be illuminated, either internally or externally.

Runway-type FATOs

5.2.11.5 The characters of the marking should be not less than 3 m in height. All FATOs except runway-type FATOs.

All FATOs except runway-type FATOs.

5.2.10.6 The characters of the marking should be not less than 1.5 m in height at surface-level heliports and not less than 1.2 m on elevated heliports, helidecks and shipboard heliports. The colour of the marking should contrast with the background and preferably be white.

5.2.11. Helideck obstacle-free sector (chevron) marking

Note.— The objective of the helideck obstacle-free sector (chevron) marking is to indicate the direction and limits of a sector that is free of obstacles above the level of the helideck for the preferred approach and departure directions.

Application

5.2.11.1 A helideck with adjacent obstacles that penetrate above the level of the helideck shall have an obstacle-free sector marking.

Location

5.2.11.2 A helideck obstacle-free sector marking shall be located, where practicable, at a distance from the centre of the TLOF equal to the radius of the largest circle that can be drawn in the TLOF or 0.5 D, whichever is greater.

Note — Where the Point of Origin is outside the TLOF, and it is not practicable to physically paint the chevron, the chevron is relocated to the TLOF perimeter on the bisector of the OFS. In this case the distance and direction of displacement, along with the attention getting “WARNING DISPLACED CHEVRON”, with the distance and direction of displacement, is marked in a box beneath the chevron in black characters not less than 10 cm high — an example Figure is given in ICAO Heliport Manual (Doc 9261).

Application

5.2.11.1 A helideck with adjacent obstacles that penetrate above the level of the helideck shall have an obstacle-free sector marking

Location

5.2.11.2 A helideck obstacle-free sector marking shall be located, where practicable, at a distance from the centre of the TLOF equal to the radius of the largest circle that can be drawn in the TLOF or 0.5 D, whichever is greater.

Note.— Where the Point of Origin is outside the TLOF, and it is not practicable to physically paint the chevron, the chevron is relocated to the TLOF perimeter on the bisector of the OFS. In this case, the distance and direction of displacement, along with the attention getting “WARNING DISPLACED CHEVRON”, with the distance and direction of displacement, is marked in a box beneath the chevron in black characters not less than 10 cm high — an example Figure is given in the Heliport Manual (Doc 9261).

Issue 4	Revision 4	Oct. 2025	Page 77 of 121
----------------	-------------------	------------------	-----------------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Characteristics

5.2.11.3 The helideck obstacle-free sector marking shall indicate the location of the obstacle-free sector and the directions of the limits of the sector.

Note.— Example figures are given in the Heliport Manual (Doc 9261).

5.2.11.4 The height of the chevron shall not be less than 30 cm.

5.2.11.5 The chevron shall be marked in a conspicuous colour.

5.2.11.6 The colour of the chevron should be black.

5.2.12 Helideck and shipboard heliport surface marking

Note.— The objective of the helideck and shipboard heliport surface marking is to provide, by colour and conspicuity, the location of the TLOF on a helideck or shipboard heliport.

Application

5.2.12.1 A surface marking shall be provided to assist the pilot to identify the location of the helideck or shipboard heliport during an approach by day.

Location

5.2.12.2 A surface marking shall be applied to the dynamic load bearing area bounded by the TLOF perimeter marking.

Characteristics

5.2.12.3 The helideck or shipboard heliport surface bounded by the TLOF perimeter marking shall be of dark green using a high friction coating.

Note.— Where the application of a surface coating may have a degrading effect on friction qualities the surface might not be painted. In such cases the best operating practice to enhance the conspicuity of markings is to outline deck markings with a contrasting colour.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2.13. Helicopter taxiway markings and markers

Note 1.— The objective of helicopter taxiway markings and markers is, without being a hazard to the helicopter, to provide to the pilot by day and, if necessary, by night, visual cues to guide movement along the taxiway.

Note 2 — *The specifications for taxi-holding position markings in Annex 14, Volume I, 5.2.10 are equally applicable to taxiways intended for ground taxiing of helicopters.*

Note 3 — *Ground taxi-routes are not required to be marked.*

Note 4.— Unless otherwise indicated it may be assumed that a helicopter taxiway is suitable for both ground taxiing and air taxiing of helicopters.

Note 5.— Signage may be required on an aerodrome where it is necessary to indicate that a helicopter taxiway is suitable only for the use of helicopters.

Application

5.2.13.1 The centre line of a helicopter taxiway shall be identified with a marking

5.2.13.2 *The edges of a helicopter ground taxiway, if not self-evident, should be identified with markers or markings.*

Location

5.2.13.3 Helicopter ground taxiway markings shall be along the centre line and, if required, along the edges of a helicopter ground taxiway.

5.2.13.4 Helicopter ground taxiway edge markers shall be located at a distance of 0.5 m to 3 m beyond the edge of the helicopter ground taxiway.

5.2.13.5 Helicopter ground taxiway edge markers, where provided, shall be spaced at intervals of not more than 15 m on each side of straight sections and 7.5 m on each side of curved sections with a minimum of four equally spaced markers per section.

Characteristics

5.2.13.6 On a paved taxiway, a helicopter taxiway centre line marking shall be a continuous yellow line 15 cm in width.

5.2.13.7 On an unpaved taxiway that will not accommodate painted markings, a helicopter taxiway centre line shall be marked with flush in-ground 15 cm wide and approximately 1.5 m in length yellow markers, spaced at intervals of not more than 30 m on straight sections and not more than 15 m on curves, with a minimum of four equally spaced markers per section.

5.2.13.8 Helicopter taxiway edge markings shall be a continuous double yellow line, each 15 cm in width, and spaced 15 cm apart (nearest edge to nearest edge).

5.2.13.9 A helicopter ground taxiway edge marker shall be frangible to the wheeled undercarriage of a helicopter.

Issue 4	Revision 4	Oct. 2025	Page 79 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2.13.10 A helicopter taxiway edge marker shall not exceed a plane originating at a height of 25 cm above the plane of the helicopter taxiway, at a distance of 0.5 m from the edge of the helicopter taxiway and sloping upwards and outwards at a gradient of 5 per cent to a distance of 3 m beyond the edge of the helicopter taxiway.

5.2.13.11 A helicopter taxiway edge marker shall be blue.

Note 1 — Guidance on suitable edge markers is given in ICAO Heliport Manual (Doc 9261).

Note 2 — If blue markers are used on an aerodrome, signage may be required to indicate that the helicopter taxiway is suitable only for helicopters.

5.2.13.125 If the helicopter ground taxiway is to be used at night, the edge markers shall be internally illuminated or retro-reflective.

5.2.14. Helicopter air taxi-route markings and markers

Note.— *The objective of helicopter air taxi-route markings and markers is to provide to the pilot by day and, if necessary, by night, visual cues to guide movement along the air taxi-route.*

Application

5.2.14.1 The centre line of a helicopter air taxi-route shall be identified with markers or markings.

Location

5.2.14.2 A helicopter air taxi-route centre line marking or markers shall be located along the centre line of the helicopter air taxi-route..

Characteristics

5.2.14.3 A helicopter air taxi-route centre line, when on a paved surface, shall be marked with a continuous yellow line 15 cm in width.

5.2.14.4 A helicopter air taxi-route centre line, that will not accommodate painted markings, shall be marked with markers, spaced at intervals of not more than 30 m on straight sections and not more than 15 m on curves, with a minimum of four equally spaced markers per section.

Note.— *Further guidance on the characteristics of markers is provided in the Heliport Manual (Doc 9261).*

5.2.14.5 If the helicopter air taxi-route is to be used at night, helicopter air taxiway edge markers shall be either internally illuminated or retro-reflective.

5.2.15. Helicopter stand markings

Note.— *The objective of the helicopter stand markings is to provide to the pilot a visual indication of an area that is free of obstacles and in which permitted manoeuvring, and all necessary ground functions, may take place; identification, mass and D-value limitations, when required; and, guidance for manoeuvring and positioning of the helicopter within the stand.*

Application

Issue 4	Revision 4	Oct. 2025	Page 80 of 121
----------------	-------------------	------------------	-----------------------

5.2.15.1 A helicopter stand perimeter marking shall be provided.

5.2.15.2 A helicopter stand shall be provided with the appropriate TDPM. See Figure 5-7 in section 5.2.9.

5.2.15.3 *Alignment lines and lead-in/lead-out lines should be provided on a helicopter stand.*

Note 1 — See Figures 3.5 to 3.9 of Chapter 3.

Note 2 — Helicopter stand identification markings may be provided where there is a need to identify individual stands.

Note 3 — Additional markings relating to stand size may be provided. See ICAO Heliport Manual (Doc 9261).

Location

5.2.15.4 The TDPM, alignment lines and lead-in/lead-out lines shall be located such that every part of the helicopter can be contained within the helicopter stand during positioning and permitted manoeuvring.

5.2.15.5 Alignment lines and lead-in/lead-out lines shall be located as shown in Figure 5-8.

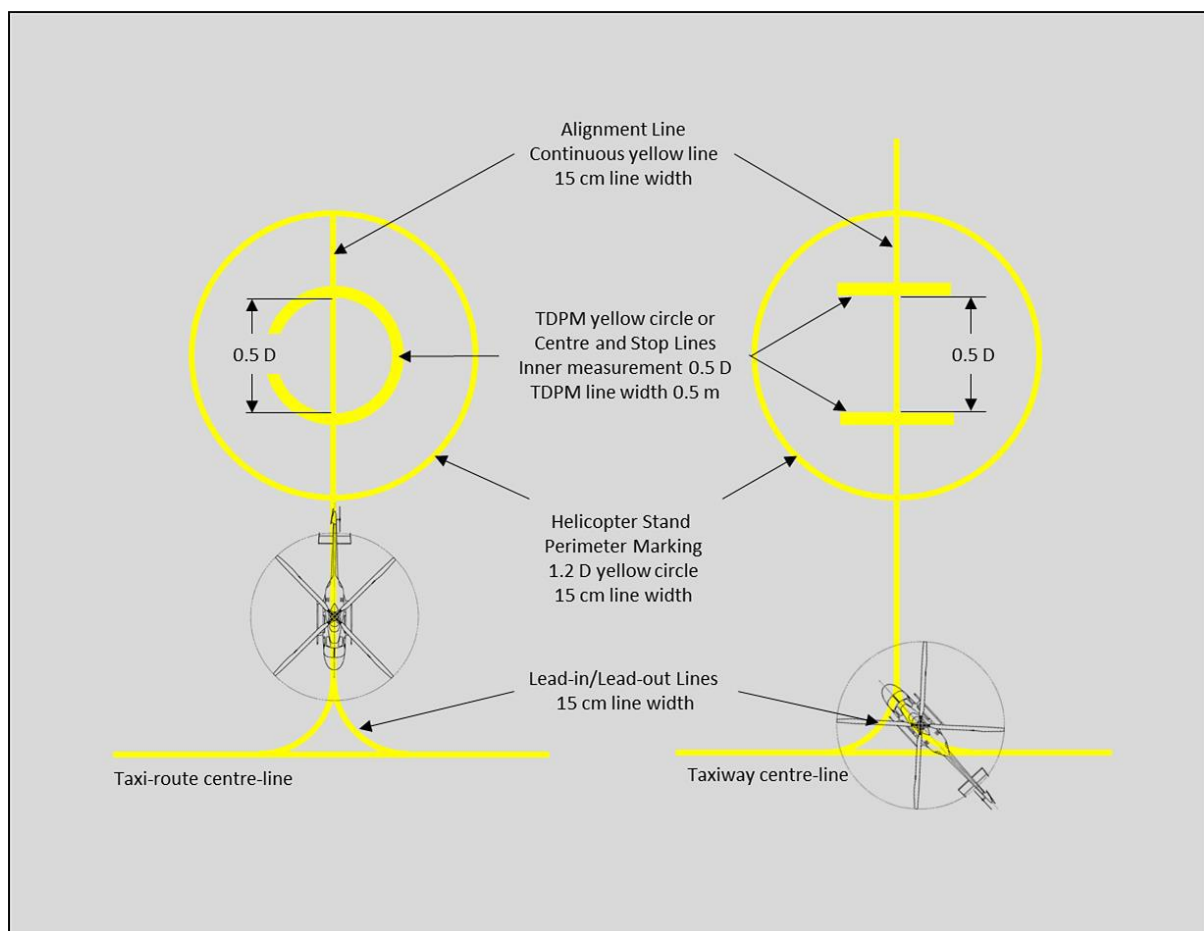


Figure 5-8. Helicopter stand markings

Characteristics

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.2.15.6 A helicopter stand perimeter marking shall consist of a continuous yellow circle and have a line width of 15 cm.

5.2.15.7 The TDPM shall have the characteristics described in Section 5.2.9 above.

5.2.15.8 Alignment lines and lead-in/lead-out lines shall be continuous yellow lines and have a width of 15 cm.

5.2.15.9 Curved portions of alignment lines and lead-in/lead-out lines shall have radii appropriate to the most demanding helicopter type the helicopter stand is intended to serve.

5.2.15.10 Stand identification markings shall be marked in a contrasting colour so as to be easily readable.

Note 1 — Where it is intended that helicopters proceed in one direction only, arrows indicating the direction to be followed may be added as part of the alignment lines.

Note 2 — The characteristics of markings related to the stand size and alignment and lead-in/lead-out lines are illustrated in Figure 5-8, – examples of stands and their markings can be seen in Figures 3.5 to 3.9 of Chapter 3..

5.2.18. Flight path alignment guidance marking

Note.— The objective of a flight path alignment guidance marking is to provide the pilot with a visual indication of the available approach and/or departure path direction(s)

Application

5.2.16.1 Flight path alignment guidance marking(s) should be provided at a heliport where it is desirable and practicable to indicate available approach and/or departure path direction(s).

Note — The flight path alignment guidance marking can be combined with a flight path alignment guidance lighting system described in 5.3.4.

Location

5.2.16.2 The flight path alignment guidance marking shall be located in a straight line along the direction of approach and/or departure path on one or more of the TLOF, FATO, safety area or any suitable surface in the immediate vicinity of the FATO or safety area.

Characteristics

5.2.16.3 A flight path alignment guidance marking shall consist of one or more arrows marked on the TLOF, FATO and/or safety area surface as shown in Figure 5-9. The stroke of the arrow(s) shall be 50 cm in width and at least 3 m in length. When combined with a flight path alignment guidance lighting system it shall take the form shown in Figure 27, which includes the scheme for marking ‘heads of the arrows’ which are constant regardless of stroke length.

Note — In the case of a flight path limited to a single approach direction or single departure direction, the arrow marking may be unidirectional. In the case of a heliport with only a single approach/departure path available, one bidirectional arrow is marked.

5.2.16.4 The markings should be in a colour which provides good contrast against the background colour of the surface on which they are marked, preferably white.

Issue 4	Revision 4	Oct. 2025	Page 82 of 121
---------	------------	-----------	----------------

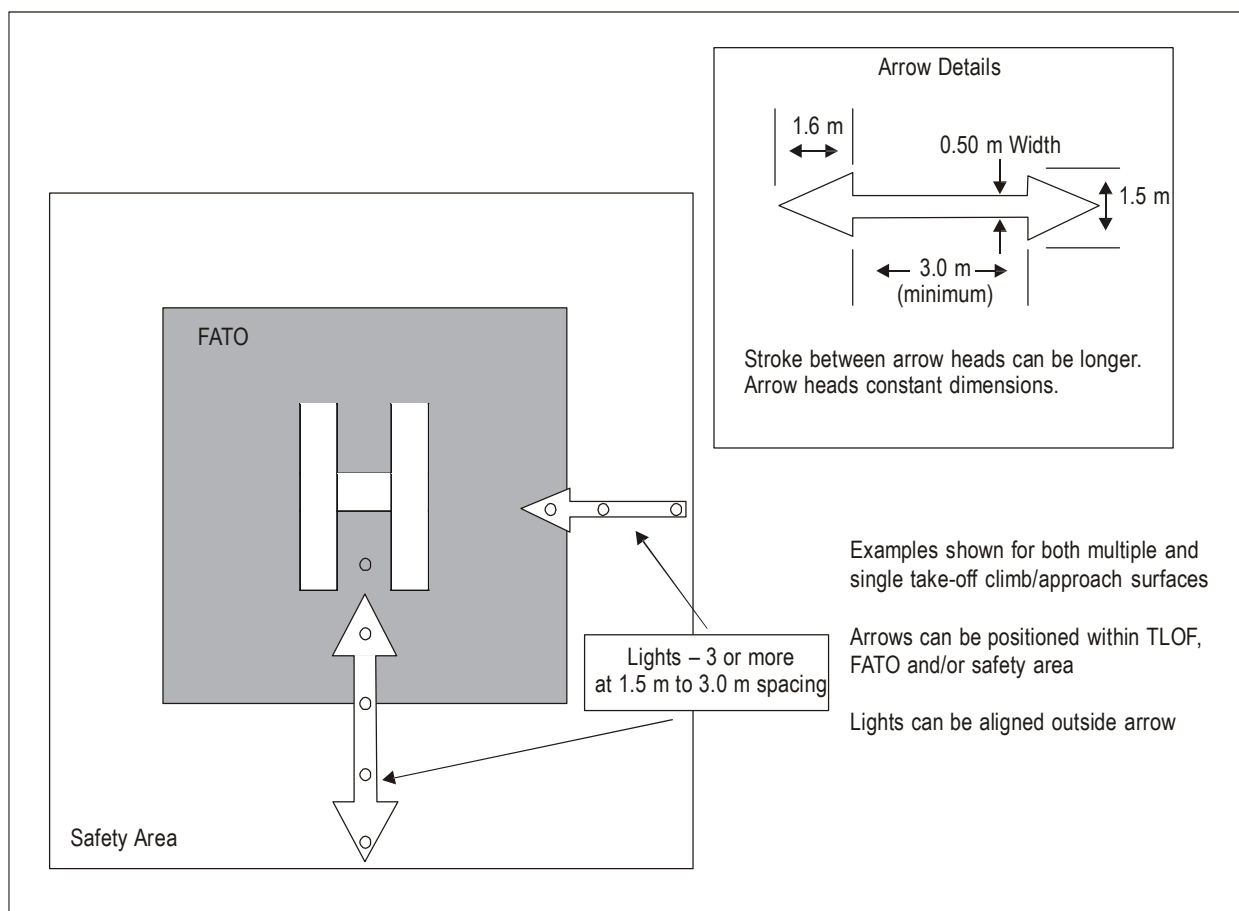


Figure 27. Flight path alignment guidance markings and lights
(ICAO Annex 14, Vol II, Fig 5-9)

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3. Lights

5.3.1. General

Note 1 — See ICAO Annex 14, Volume I, 5.3.1, concerning specifications on screening of non-aeronautical ground lights, and design of elevated and inset lights.

Note 2 — In the case of helidecks and heliports located near navigable waters, consideration needs to be given to ensuring that aeronautical ground lights do not cause confusion to mariners.

Note 3 — As helicopters will generally come very close to extraneous light sources, it is particularly important to ensure that, unless such lights are navigation lights exhibited in accordance with international regulations, they are screened or located so as to avoid direct and reflected glare.

Note 4 — Systems addressed in sections 5.3.4, 5.3.6, 5.3.7, and 5.3.8 are designed to provide effective lighting cues based on night conditions. Where lights are to be used in conditions other than night (i.e. day or twilight) it may be necessary to increase the intensity of the lighting to maintain effective visual cues by use of a suitable brilliancy control. Guidance is provided in ICAO Aerodrome Design Manual (Doc 9157), Part 4 — Visual Aids.

Note 5.— The specifications for marking and lighting of obstacles included in Annex 14, Volume I, Chapter 6, are equally applicable to heliports and winching areas.

Note 6.— In cases where operations into a heliport are to be conducted at night with Night Vision Imaging Systems (NVIS), it is important to ensure all heliport lighting are compatible with the NVIS such as through the addition of infrared emitters to the heliport lighting. Where such additional measures are not practicable, helicopter operators using NVIS are to be made aware of it.

5.3.2. Heliport beacon

Note.— The objective of a heliport beacon is to make a heliport more conspicuous to assist the pilot to locate and identify the heliport at night and/or by day in reduced visibility.

Application

5.3.2.1 A heliport beacon should be provided at a heliport where:

- (a) long-range visual guidance is considered necessary and is not provided by other visual means; or
- (b) identification of the heliport is difficult due to surrounding lights.

Location

5.3.2.2 The heliport beacon shall be located on or adjacent to the heliport preferably at an elevated position and so that it does not dazzle a pilot at short range.

Note — Where a heliport beacon is likely to dazzle pilots at short range, it may be switched off during the final stages of the approach and landing.

Characteristics

5.3.2.3 The heliport beacon shall emit repeated series of equispaced short duration white flashes in the format in Figure 5-11.

5.3.2.4 The light from the beacon shall show at all angles of azimuth.

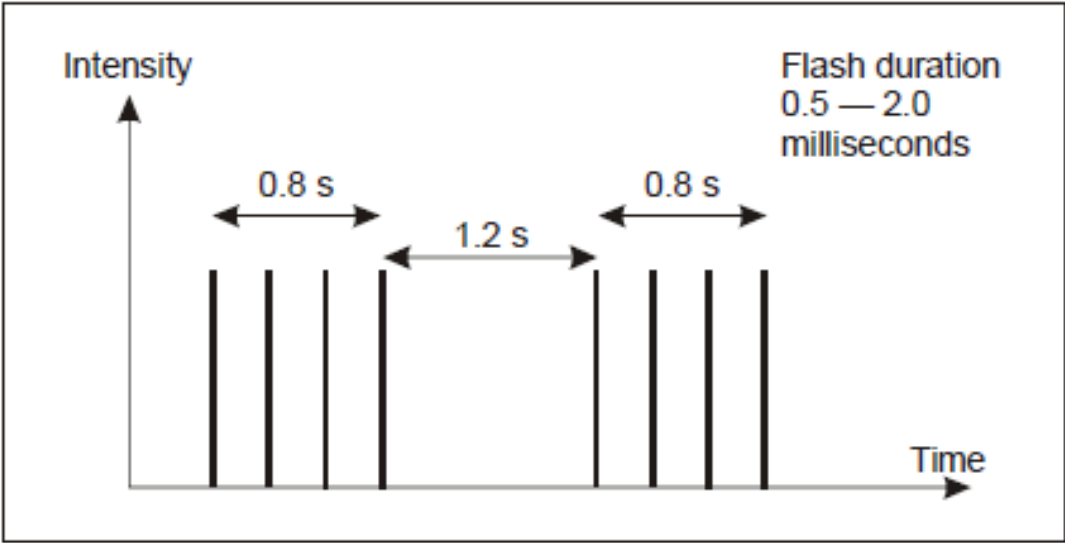


Figure 5-11. Heliport beacon flash characteristics

5.3.2.5 The effective light intensity distribution of each flash should be as shown in Figure 5-12, Illustration 1.

Note — Where brilliancy control is desired, settings of 10 per cent and 3 per cent have been found to be satisfactory. In addition, shielding may be necessary to ensure that pilots are not dazzled during the final stages of the approach and landing.



Elevation	10°	250 cd*
7°		750 cd*
4°		1 700 cd*
2 1/2°		2 500 cd*
1 1/2°		2 500 cd*
0°		1 700 cd*
-180°	Azimuth	+180°
* Effective intensity		
Illustration 1 — Heliport beacon		
Elevation	15°	25 od
9°		250 od
6°		350 od
5°		350 od
2°		250 od
0°		25 od
-180°	Azimuth	+180°
* Effective intensity		
Illustration 2 — Approach light steady burning		
Elevation	15°	250 od*
9°		2 500 od*
6°		3 500 od*
5°		3 500 od*
2°		2 500 od*
0°		250 od*
-180°	Azimuth	+180°
* Effective intensity		
Illustration 3 — Approach light flashing		

The diagram illustrates the HAPI (High Altitude Precision Illumination) system. It features concentric circles representing different light intensities: 9 000 od, 6 375 od, 3 750 od, 1 875 od, and 375 od. The circles are labeled with elevation angles: 10°, 8°, 6°, 4°, 3°, 2°, 1°, and 0°. The azimuth angles are marked from 0° to 180° in 15° increments. The diagram also shows the Green and Red lights used for identification.

Note — Additional values may be required in the case of installations requiring identification by means of the lights at an elevation of less than two degrees.

Illustration 4 — HAPI system		
Elevation	30°	10 od
25°		50 od
20°		100 od
10°		
3°		100 od
0°		10 od
-180°	Azimuth	+180°
Illustration 5 — Final approach and take-off area lights and aiming point lights		
Elevation (E)	Azimuth	
20° < E 90°		3 od
13° < E 20°		8 od
10° < E 13°		15 od
5° < E 10°		30 od
2° E 5°		15 od
-180°	Azimuth	+180°
Illustration 6 — TLOF perimeter lights and flight path alignment guidance lighting system		
Azimuth		
-180°	0°	
0°	180°	
Illustration 7 — Touchdown and lift-off area luminescent panels		

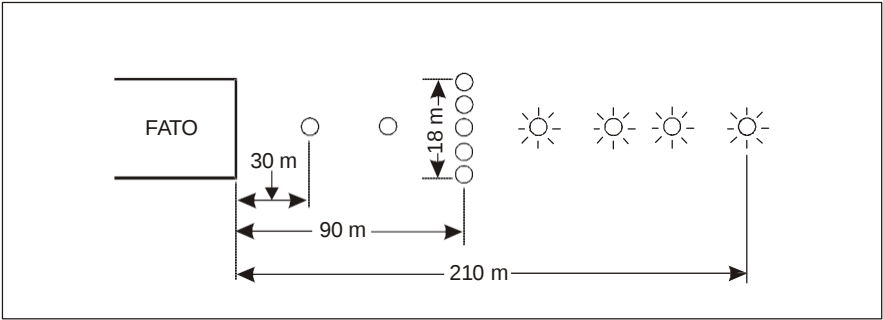


Figure 30. Approach lighting system
(ICAO Annex 14, Vol II, Fig 5-12)

5.3.3. Approach lighting system

Note.— The objective of an approach lighting system is to allow the helicopter operator, by day and night, to visually identify the heliport and align the helicopter on the centreline of the FATO upon arriving at a prescribed point on the approach flight path.

Application

5.3.3.1 An approach lighting system should be provided at a heliport where it is desirable and practicable to indicate a preferred approach direction.

Location

5.3.3.2 The approach lighting system shall be located in a straight line along the preferred direction of approach.

Characteristics

5.3.3.3 An approach lighting system should consist of a row of three lights spaced uniformly at 30 m intervals and of a crossbar 18 m in length at a distance of 90 m from the perimeter of the FATO as shown in Figure 30. The lights forming the crossbar should be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights and spaced at 4.5 m intervals. Where there is the need to make the final approach course more conspicuous, additional lights spaced uniformly at 30 m intervals should be added beyond the crossbar. The lights beyond the crossbar may be steady or sequenced flashing, depending upon the environment.

Note — Sequenced flashing lights may be useful where identification of the approach lighting system is difficult due to surrounding lights.

5.3.3.4 The steady lights shall be omnidirectional white lights.

5.3.3.5 Sequenced flashing lights shall be omnidirectional white lights.

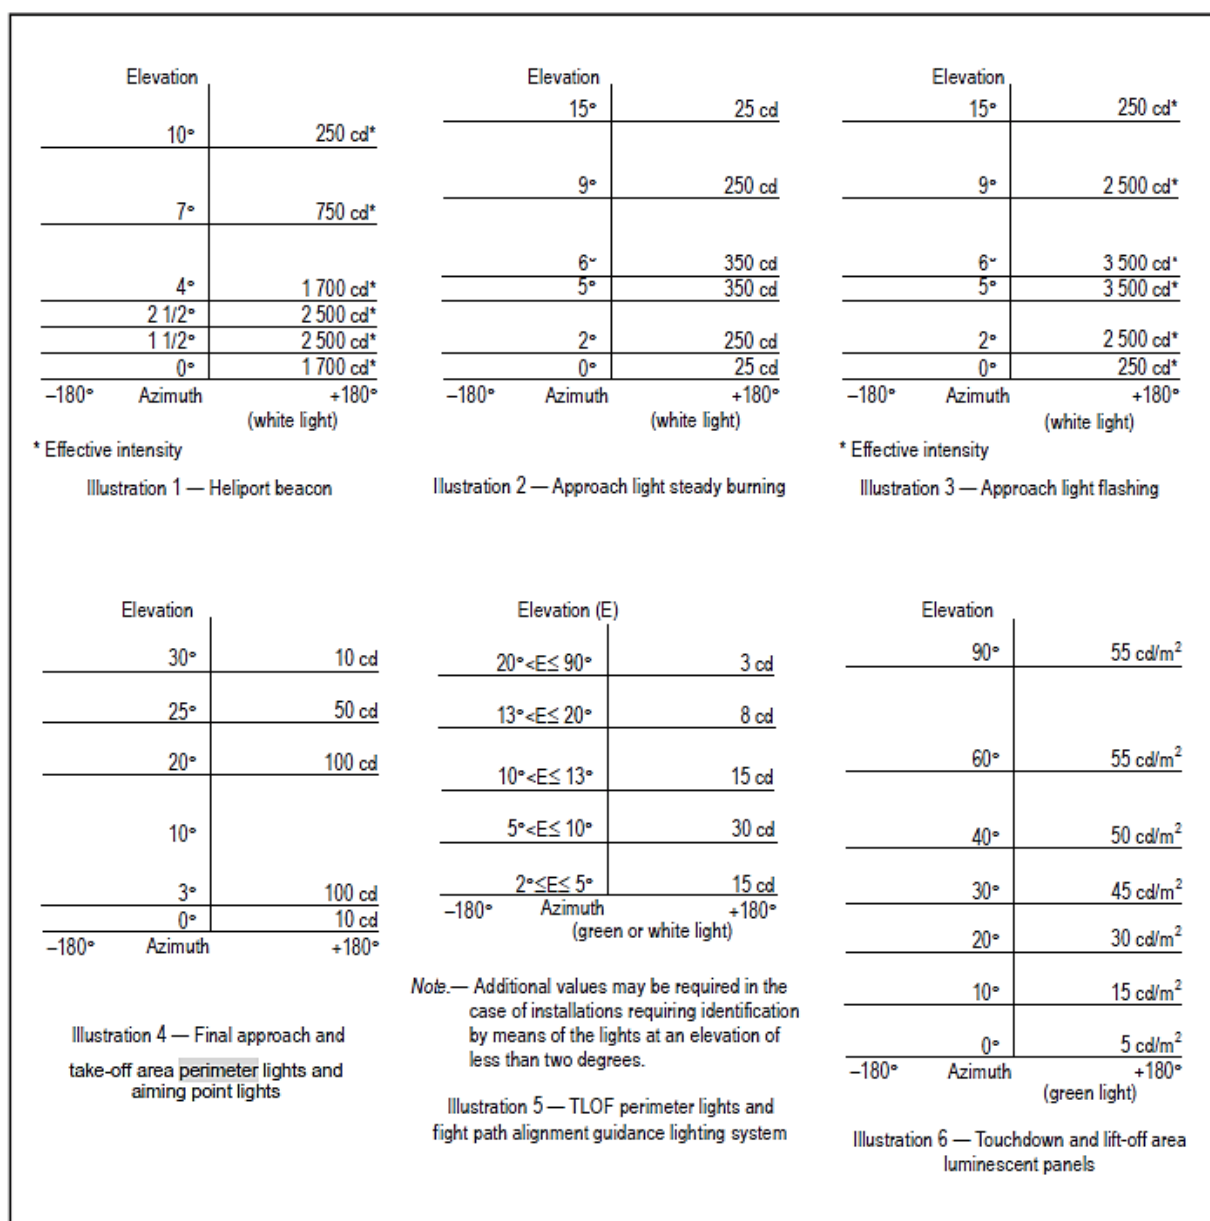


Figure 5-12. Isocandela diagrams

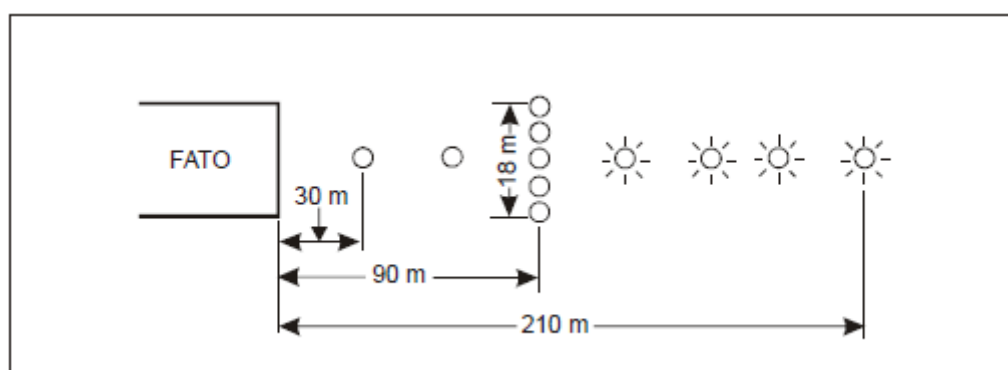


Figure 5-13. Approach lighting system

5.3.3.6 The flashing lights should have a flash frequency of one per second and their light distribution should be as shown in Figure 5-12, Illustration 3. The flash sequence should commence from the outermost light and progress towards the crossbar.

5.3.3.7 A suitable brilliancy control should be incorporated to allow for adjustment of light intensity to meet the prevailing conditions.

Note — The following intensity settings have been found suitable:

- (a) steady lights — 100 per cent, 30 per cent and 10 per cent; and
- (b) flashing lights — 100 per cent, 10 per cent and 3 per cent.

5.3.4. Flight path alignment guidance lighting system

Note.— The objective of a flight path alignment guidance lighting system is to indicate, by day, night, and in reduced visibility, available approach and/or departure flight path direction(s).

Application

5.3.4.1 *Flight path alignment guidance lighting system(s) should be provided at a heliport where it is desirable and practicable to indicate available approach and/or departure path direction(s).*

Note — The flight path alignment guidance lighting can be combined with a flight path alignment guidance marking(s) described in 5.2.18.

Location

5.3.4.2 The flight path alignment guidance lighting system shall be in a straight line along the direction(s) of approach and/or departure path on one or more of the TLOF, FATO, safety area or any suitable surface in the immediate vicinity of the FATO, TLOF or safety area.

5.3.4.3 *If combined with a flight path alignment guidance marking, as far as is practicable the lights should be located inside the “arrow” markings.*

Characteristics

5.3.4.4 *A flight path alignment guidance lighting system should consist of a row of three or more lights spaced uniformly a total minimum distance of 6 m. Intervals between lights should not be less than 1.5 m and should not exceed 3 m. Where space permits there should be 5 lights. (See Figure 5-10.)*

Note — The number of lights and spacing between these lights may be adjusted to reflect the space available. If more than one flight path alignment system is used to indicate available approach and/or departure path direction(s), the characteristics for each system are typically kept the same. (See Figure 5-10.)

5.3.4.5 The lights shall be steady omnidirectional inset white lights.

5.3.4.6 The distribution of the lights should be as indicated in Figure 5-12, Illustration 5.

5.3.4.7 A suitable control should be incorporated to allow for adjustment of light intensity to meet the prevailing conditions and to balance the flight path alignment guidance lighting system with other heliport lights and general lighting that may be present around the heliport.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3.5. Visual alignment guidance system

Note.— *The objective of a visual alignment guidance system is to provide conspicuous and discrete cues to assist the pilot to attain, and maintain, a specified approach track to a heliport. Guidance on suitable visual alignment guidance systems is given in the Heliport Manual (Doc 9261).*

Application

- 5.3.5.1 A visual alignment guidance system should be provided to serve the approach to a heliport where one or more of the following conditions exist especially at night:
- (a) obstacle clearance, noise abatement or traffic control procedures require a particular direction to be flown;
 - (b) the environment of the heliport provides few visual surface cues; and
 - (c) it is physically impracticable to install an approach lighting system.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3.6. Visual approach slope indicator

Note.— The objective of a visual approach slope indicator is to provide conspicuous and discrete colour cues within a specified elevation and azimuth, to assist the pilot to attain and maintain the approach slope to a desired position within a FATO. Guidance on suitable visual approach slope indicators is given in ICAO Heliport Manual (Doc 9261).

Application

5.3.6.1 A visual approach slope indicator should be provided to serve the approach to a heliport, whether or not the heliport is served by other visual approach aids or by non-visual aids, where one or more of the following conditions exist especially at night:

- (a) obstacle clearance, noise abatement or traffic control procedures require a particular slope to be flown;
- (b) the environment of the heliport provides few visual surface cues; and
- (c) the characteristics of the helicopter require a stabilized approach.

5.3.7. Final approach and take-off area perimeter lights for surface-level heliports

Note.— The objective of a final approach and take-off area perimeter lights for onshore surface-level heliports is to provide to the pilot operating at night an indication of the shape, location and extent of the FATO.

Application

5.3.7.1 Where a FATO is with a solid surface established at a surface-level heliport intended for use at night, FATO perimeter lights shall be provided except that they may be omitted where the FATO and the TLOF are nearly coincidental or the extent of the FATO is self-evident.

Location

5.3.7.2 FATO perimeter lights shall be placed along the edges of the FATO. The lights shall be uniformly spaced as follows:

- (a) for an area in the form of a square or rectangle, at intervals of not more than 50 m with a minimum of four lights on each side including a light at each corner; and
- (b) for any other shaped area, including a circular area, at intervals of not more than 5 m with a minimum of ten lights.

Characteristics

5.3.7.3 FATO perimeter lights shall be fixed omnidirectional lights showing green or white with variable intensity. Green perimeter lights shall be permitted only when the FATO is a dynamic load-bearing surface..

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Note.— Further guidance on colour selection of FATO perimeter lights is provided in the Heliport Manual (Doc 9261).

- 5.3.7.4 The light distribution of FATO perimeter lights should be as shown in Figure 5-12, Illustration 4.
- 5.3.7.5 The lights should not exceed a height of 25 cm and should be inset when a light extending above the surface would endanger helicopter operations. Where a FATO is not meant for lift-off or touchdown, the lights should not exceed a height of 25 cm above ground or snow level.

5.3.8. Aiming point lights

Note.— The objective of aiming point lights is to provide a visual cue indicating to the pilot by night the preferred approach/departure direction; the point to which the helicopter approaches to a hover before positioning to a TLOF, where a touchdown can be made; and that the surface of the FATO is not intended for touchdown.

Application

- 5.3.8.1 Where an aiming point marking is provided at a heliport intended for use at night, aiming point lights should be provided.

Location

- 5.3.8.2 Aiming point lights shall be collocated with the aiming point marking.

Characteristics

- 5.3.8.3 Aiming point lights shall form a pattern of at least six omnidirectional white lights as shown in Figure 5-7. The lights shall be arranged equidistantly with a light at the apex and at both corners. The lights shall be inset when a light extending above the surface could endanger helicopter operations.
- 5.3.8.4 The light distribution of aiming point lights should be as shown in Figure 5-12, Illustration 4.

5.3.9. Touchdown and lift-off area lighting system

Note.— The objective of a touchdown and lift-off area lighting system is to provide illumination of the TLOF and required elements within. For a TLOF located in a FATO, the objective is to provide discernibility, to the pilot on a final approach, of the TLOF and required elements within; while for a TLOF located on an elevated heliport, shipboard heliport or helideck, the objective is visual acquisition from a defined range and to provide sufficient shape cues to permit an appropriate approach angle to be established.

Application

- 5.3.9.1 A TLOF lighting system shall be provided at a heliport intended for use at night.
- Note.**— Where a TLOF is located in a stand, the objective may be met with the use of ambient lighting or stand floodlighting (see 5.3.10).
- 5.3.9.2 For a surface-level heliport, lighting for the TLOF in a FATO shall consist of either of the following:
- (a) perimeter lights; or

- (b) arrays of segmented point source lighting (ASPSL) or luminescent panel (LP) lighting to identify the TLOF perimeter when a) is not practicable and FATO perimeter lights are available.

5.3.9.3 For an elevated heliport, shipboard heliport or helideck, lighting of the TLOF in a FATO shall consist of:

- (a) perimeter lights; and
(b) ASPSL and/or LPs to identify the TDPC and/or floodlighting to illuminate the TLOF.

Note — Guidance on suitable systems is contained in the Heliport Manual (Doc 9261).

5.3.9.4 When enhanced surface texture cues are required at a TLOF ASPSL and/or LPs to identify the TDPC and/ or floodlighting should be provided at a surface-level heliport intended for use at night.

Location

5.3.9.5 TLOF perimeter lights shall be placed along the edge of the area designated for use as the TLOF or within a distance of 1.5 m from the outer edge. TLOF perimeter lights shall be uniformly spaced at intervals of not more than 3 m for elevated heliports, helidecks and shipboard heliports and not more than 5 m for surface-level heliports.

Note — Where the TLOF is circular, drift of the helicopter may be difficult to discern by the pilot. Guidance on lighting patterns to counter drift displacement over the TLOF is contained in ICAO Heliport Manual (Doc 9261).

5.3.9.6 The TLOF perimeter lights shall be installed at an elevated heliport or fixed helideck such that the pattern cannot be seen by the pilot from below the elevation of the TLOF.

5.3.9.7 The TLOF perimeter lights shall be installed on a moving helideck or shipboard heliport, such that the pattern cannot be seen by the pilot from below the elevation of the TLOF when the helideck or shipboard heliport is level.

5.3.9.8 On surface-level heliports, ASPSL or LPs, if provided to identify the TLOF, shall be placed along the marking designating the edge of the TLOF. Where the TLOF is a circle, they shall be located on straight lines circumscribing the area.

5.3.9.9 TLOF floodlights where provided shall be arranged so as to avoid glare to pilots in flight and to personnel working on the area.

Note — Detailed specifications on the number of lights to be provided, based on the shape and size of the TLOF are contained in the Heliport Manual (Doc 9261).

Characteristics

5.3.9.10 The TLOF perimeter lights shall be fixed omnidirectional lights showing green.

5.3.9.11 At a surface-level heliport, ASPSL or LPs shall emit green light when used to define the perimeter of the TLOF.

5.3.9.12 The chromaticity and luminance of colours of LPs should conform to ICAO Annex 14, Volume I, Appendix 1, 3.4.

5.3.9.13 An LP shall have a minimum width of 6 cm. The panel housing shall be the same colour as the marking it defines.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3.9.14 For a surface level or elevated heliport, the TLOF perimeter lights located in a FATO shall not exceed a height of 25 cm and should be inset when a light extending above the surface could endanger helicopter operations.

5.3.9.15 For a helideck or shipboard heliport, the TLOF perimeter lights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.

5.3.9.16 When located within the safety area of a surface level or elevated heliport, the TLOF floodlights should not exceed a height of 25 cm.

5.3.9.17 For a helideck or shipboard heliport, the TLOF floodlights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.

5.3.9.18 The ASPSL and LPs shall not extend above the surface by more than 2.5 cm.

Note.— Guidance on panel profiles and loading limitations is contained in the Heliport Manual (Doc 9261).

5.3.9.19 The light distribution of the perimeter lights should be as shown in, FIGURE5-12, Illustration 5.

Note.— The light distribution of the ASPSL and/or LPs used to illuminate the TDPC and heliport identification marking, or cross (chevron) markings at a hospital, are detailed in the Heliport Manual (Doc 9261).

5.3.9.20 The spectral distribution of TLOF area floodlights shall be such that the surface and obstacle marking can be correctly identified.

5.3.9.21 If utilised, the heliport identification marking lighting, or cross marking lighting at a hospital, should be omnidirectional showing green.

5.3.10 Helicopter stand floodlighting

Note.— The objective of helicopter stand floodlighting is to provide illumination of the stand surface and associated markings to assist the manoeuvring and positioning of a helicopter and facilitation of essential operations around the helicopter.

Application

5.3.10.1 Floodlighting should be provided on a helicopter stand intended to be used at night.

Note.— Guidance on stand floodlighting is given in the apron floodlighting section in ICAO Aerodrome Design Manual (Doc 9157), Part 4.

Location

5.3.10.2 Helicopter stand floodlights should be located so as to provide adequate illumination, with a minimum of glare to the pilot of a helicopter in flight and on the ground, and to personnel on the stand. The arrangement and aiming of floodlights should be such that a helicopter stand receives light from two or more directions to minimize shadows.

Characteristics

Issue 4	Revision 4	Oct. 2025	Page 94 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3.10.3 The spectral distribution of stand floodlights shall be such that the colours used for surface and obstacle marking can be correctly identified.

5.3.10.4 Horizontal and vertical illuminance shall be sufficient to ensure that visual cues are discernible for required manoeuvring and positioning, and essential operations around the helicopter can be performed expeditiously without endangering personnel or equipment.

5.3.11. Winching area floodlighting

Note.— The objective of winching area floodlighting is to provide illumination of the surface, obstacles and visual cues to assist a helicopter to be positioned over, and retained within, an area from which a passenger or equipment can be lowered or raised.

Application

5.3.11.1 Winching area floodlighting shall be provided at a winching area intended for use at night.

Location

5.3.11.2 Winching area floodlights shall be located so as to avoid glare to pilots in flight or to personnel working on the area. The arrangement and aiming of floodlights shall be such that shadows are kept to a minimum.

Characteristics

5.3.11.3 The spectral distribution of winching area floodlights shall be such that the surface and obstacle markings can be correctly identified.

5.3.11.4 *The average horizontal illuminance should be at least 10 lux, measured on the surface of the winching area.*

5.3.12. Taxiway lights

Note — *The specifications for taxiway centre line lights and taxiway edge lights in ICAO Annex 14, Volume I, 5.3.16 and 5.3.17, are equally applicable to taxiways intended for ground taxiing of helicopters.*

5.3.13. **Visual aids for denoting obstacles** outside and below the obstacle limitation surfaces

Note.— *Arrangements for an aeronautical study of objects outside the obstacle limitation surface (OLS) and for other objects are addressed in ICAO Annex 14, Volume I, Chapter 4.*

5.3.13.1 Where an aeronautical study indicates that obstacles in areas outside and below the boundaries of the OLS, established for a heliport, constitute a hazard to helicopters, they should be marked and lit, except that the marking may be omitted when the obstacle is lighted with high-intensity obstacle lights by day.

5.3.13.2 Where an aeronautical study indicates that overhead wires or cables crossing a river, waterway, valley or highway constitute a hazard to helicopters, they should be marked, and their supporting towers marked and lit.

Issue 4	Revision 4	Oct. 2025	Page 95 of 121
---------	------------	-----------	----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

5.3.14. Floodlighting of obstacles

Note.— *The objective of obstacle floodlighting is to highlight the shape and location of obstacles in the vicinity of the heliport, to assist a pilot flying at night to avoid all obstacles by a safe margin.*

Application

5.3.14.1 At a heliport intended for use at night, obstacles shall be floodlighted if it is not possible to display obstacle lights on them.

Location

5.3.14.2 Obstacle floodlights shall be arranged so as to illuminate the entire obstacle and as far as practicable in a manner so as not to dazzle the helicopter pilots.

Characteristics

5.3.14.3 *Obstacle floodlighting should be such as to produce a luminance of at least 10 cd/m².*

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

6 Heliport Emergency Response

6.1 Heliport Emergency Planning

General

Introductory Note.— Heliport emergency planning is the process of preparing a heliport to cope with an emergency that takes place at the heliport or in its vicinity. Examples of emergencies include crashes on or off the heliport, medical emergencies, dangerous goods occurrences, fires and natural disasters.

The purpose of heliport emergency planning is to minimize the impact of an emergency by saving lives and maintaining helicopter operations.

The heliport emergency plan sets out the procedures for coordinating the response of heliport agencies or services (air traffic services unit, firefighting services, heliport administration, medical and ambulance services, aircraft operators, security services and police) and the response of agencies in the surrounding community (fire departments, police, medical and ambulance services, hospitals, military, and harbour patrol or coast guard) that could be of assistance in responding to the emergency.

- 6.1.1 A heliport emergency plan shall be established commensurate with the helicopter operations and other activities conducted at the heliport.
- 6.1.2 The plan shall identify agencies which could be of assistance in responding to an emergency at the heliport or in its vicinity.
- 6.1.3 The heliport emergency plan should provide for the coordination of the actions to be taken in the event of an emergency occurring at a heliport or in its vicinity.
- 6.1.4 Where an approach/departure path at a heliport is located over water, the plan should identify which agency is responsible for coordinating rescue in the event of a helicopter ditching and indicate how to contact that agency.
- 6.1.5 The plan should include, as a minimum, the following information:
 - a) the types of emergencies planned for;
 - b) how to initiate the plan for each emergency specified;
 - c) the name of agencies on and off the heliport to contact for each type of emergency with telephone numbers or other contact information;
 - d) the role of each agency for each type of emergency;
 - e) a list of pertinent on-heliport services available with telephone numbers or other contact information;
 - f) copies of any written agreements with other agencies for mutual aid and the provision of emergency services; and
 - g) a grid map of the heliport and its immediate vicinity.
- 6.1.6 All agencies identified in the plan should be consulted about their role in the plan.
- 6.1.7 The plan should be reviewed and the information in it updated at least yearly or, if deemed necessary, after an actual emergency, so as to correct any deficiency found during actual emergency.
- 6.1.8 A test of the emergency plan should be carried out at least once every three years.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

6.2 Rescue and firefighting

General — Introductory Notes

The content of this section has been extensively revised and updated for Amendment 9. With new concepts and terms now to consider, it is important that section 6.2 be read in conjunction with the appropriate detailed guidance on rescue and firefighting options given in the Heliport Manual (Doc 9261).

Provisions described in this section are intended to address incidents or accidents within the heliport response area only. No dedicated firefighting provisions are included for helicopter accidents or incidents that may occur outside the response area, such as on an adjacent roof near an elevated heliport.

Complementary agents are ideally dispensed from one or two extinguishers (although more extinguishers may be permitted where high volumes of an agent are specified, e.g. H3 operations). The discharge rate of complementary agents needs to be selected for optimum effectiveness of the agent used. When selecting dry chemical powders for use with foam, care needs to be exercised to ensure compatibility. Complementary agents need to comply with the appropriate specifications of the International Organization for Standardization (ISO).

Where a fixed monitor system (FMS) is installed, trained monitor operators, where provided, be positioned on at least the upwind location to ensure primary media is directed to the seat of the fire. For a ring-main system (RMS) practical testing has indicated that these solutions are only guaranteed to be fully effective for TLOFs up to 20 m diameter. If the TLOF is greater than 20 m a RMS should not be considered unless supplemented by other means to distribute primary media (e.g. additional pop-up nozzles are installed in the centre of the TLOF).

The International Convention for the Safety of Life at Sea (SOLAS) sets forth provisions on rescue and firefighting (RFF) arrangements for purpose-built and non-purpose-built shipboard heliports, in SOLAS regulations II-2/18, II-2-Helicopter Facilities, and the SOLAS Fire Safety Systems Code.

It may therefore be assumed that this chapter does not include RFF arrangements for purpose-built or non-purpose-built shipboard heliports or for winching areas.

6.2.1 Applicability

6.2.1.1 The following specifications shall apply to new builds or replacement of existing systems or part thereof from 1 January 2023: 6.2.2.1, 6.2.3.3, 6.2.3.4, 6.2.3.6, 6.2.3.7, 6.2.3.9, 6.2.3.10, 6.2.3.12, 6.2.3.13 and 6.2.4.2.

Note.— For areas for the exclusive use of helicopters at aerodromes primarily for the use of aeroplanes, distribution of extinguishing agents, response time, rescue equipment and personnel have not been considered in this section; see ICAO Annex 14, Volume I, Chapter 9.

6.2.1.2 Rescue and firefighting equipment and services shall be provided at helidecks and at elevated heliports located above occupied structures.

Issue 4	Revision 4	Oct. 2025	Page 98 of 121
---------	------------	-----------	----------------

6.2.1.3 A safety risk assessment should be performed to determine the need for rescue and firefighting equipment and services at surface level heliports and elevated heliports located above unoccupied structures.

Note.— Further guidance on factors to inform the safety risk assessment, including staffing models for heliports with only occasional movements and examples of unoccupied areas that may be located beneath elevated heliports, are given in ICAO Heliport Manual (Doc 9261).

6.2.2 Level of protection provided

6.2.2.1 For the application of primary media the discharge rate (in litres/minute) applied over the assumed practical critical area (in m²) shall be predicated on a requirement to bring any fire which may occur on the heliport under control within one minute, measured from activation of the system at the appropriate discharge rate.

Practical critical area calculation where primary media is applied as a solid stream

Note.— This section is not applicable to helidecks regardless of how primary media is being delivered.

6.2.2.2 The practical critical area should be calculated by multiplying the helicopter fuselage length (m) by the helicopter fuselage width (m) plus an additional width factor (W1) of 4 m. Categorization from H0 to H3 should be determined on the basis of the fuselage dimensions in Table 6-1 below

Table 6-1. Heliport firefighting category

Category (1)	Maximum fuselage length (2)	Maximum fuselage width (3)
H0	up to but not including 8 m	1.5 m
H1	from 8 m up to but not including 12 m	2 m
H2	from 12 m up to but not including 16 m	2.5 m
H3	from 16 m up to 20 m	3 m

Note 1.— For helicopters which exceed one or both of the dimensions for a category H3 heliport, it will be necessary to recalculate the level of protection using practical critical area assumptions based on the actual fuselage length and the actual fuselage width of the helicopter plus an additional width factor (W1) of 6 m.

Note 2.— The practical critical area may be considered on a helicopter type-specific basis by using the formula in 6.2.2.2. Guidance on practical critical area in relation to the heliport firefighting category is given in the Heliport Manual (Doc 9261) where a discretionary 10 per cent tolerance on fuselage dimension “upper limits” is applied.

Practical critical area calculation where primary media is applied in a dispersed pattern

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

6.2.2.3 For heliports, except helidecks, the practical critical area should be based on an area contained within the heliport perimeter, which always includes the TLOF, and to the extent that it is load-bearing, the FATO.

6.2.2.4 For helidecks the practical critical area should be based on the largest circle capable of being accommodated within the TLOF perimeter.

Note.— Recommendation 6.2.2.4, is applied for the practical critical area calculation for helidecks regardless of how primary media is being delivered.

6.2.3 Extinguishing agents

Note.— Throughout section 6.2.3 the discharge rate of a performance level B foam is assumed to be based on an application rate of 5.5 L/min/m², and for a performance level C foam and for water, is assumed to be based on an application rate of 3.75 L/min/m². These rates may be reduced if, through practical testing, a State demonstrates that the objectives of 6.2.2.1 can be achieved for a specific foam use at a lower discharge rate (l/min).

Information on the required physical properties and fire extinguishing performance criteria needed for a foam to achieve an acceptable performance level B or C rating is given in ICAO Airport Services Manual (Doc 9137), Part 1.

Surface level heliports with primary media applied as a solid stream using a portable foam application system (PFAS)

Note.— Except for a limited-sized surface level heliport, the assumption is made that foam dispensing equipment will be transported to the incident or accident location on an appropriate vehicle (a PFAS).

6.2.3.1 Where an RFFS is provided at a surface level heliport, the amount of primary media and complementary agents should be in accordance with Table 6-2.

Note.— The minimum discharge duration in Table 6-2 is assumed to be two minutes. However, if the availability of back-up specialist fire services is remote from the heliport, consideration may need to be given to increasing the discharge duration from two minutes to three minutes.

Table 6-2 Minimum usable amounts of extinguishing agents for surface-level heliports

Category	Foam meeting performance level B		Foam meeting performance level C		Complementary agents	
	Water (L)	Discharge rate foam solution/minute (L)	Water (L)	Discharge rate foam solution/minute (L)	Dry chemical powder (kg)	Gaseous media (kg)
(1)	(2)	(3)	(4)	(5)	(6)	(7)
H 0	500	250	330	165	23	9
H 1	800	400	540	270	23	9
H 2	1 200	600	800	400	45	18
H 3	1 600	800	1 100	550	90	36

Elevated heliports with primary media applied as a solid stream using a fixed foam application system (FFAS)

Note.— The assumption is made that primary media (foam) will be delivered through a fixed foam application system such as a fixed monitor system (FMS).

6.2.3.2 Where an RFFS is provided at an elevated heliport, the amount of foam media and complementary agents should be in accordance with Table 6-3.

Note.— The minimum discharge duration in Table 6-3 is assumed to be five minutes.

Table 6-3 Minimum usable amounts of extinguishing agents for elevated heliports

Category	Foam meeting performance level B		Foam meeting performance level C		Complementary agents	
	Water (L)	Discharge rate foam solution/minute (L)	Water (L)	Discharge rate foam solution/minute (L)	Dry chemical powder (kg)	Gaseous media (kg)
(1)	(2)	(3)	(4)	(5)	(6)	(7)
H 0	1 250	250	825	165	23	9
H 1	2 000	400	1 350	270	45	18
H 2	3 000	600	2 000	400	45	18
H 3	4 000	800	2 750	550	90	36

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Note.— For guidance on the provision of additional hand-controlled foam branches for the application of aspirated foam, see ICAO Heliport Manual (Doc 9261).

Elevated heliports/ limited-sized surface level heliports with primary media applied in a dispersed pattern through a fixed foam application system (FFAS) – a solid plate heliport

6.2.3.3 *The amount of water required for foam production should be predicated on the practical critical area (m²) multiplied by the appropriate application rate (L/min/m²), giving a discharge rate for foam solution (in L/min). The discharge rate should be multiplied by the discharge duration to calculate the amount of water needed for foam production.*

6.2.3.4 *The discharge duration should be at least three minutes.*

6.2.3.5 *Complementary media should be in accordance with Table 6-3, for H2 operations.*

Note.— For helicopters with a fuselage length greater than 16 m and/or a fuselage width greater than 2.5 m, complementary media in Table 6-3 for H3 operations may be considered.

Purpose-built elevated heliports/limited-sized surface level heliport with primary media applied in a dispersed pattern through a fixed application system (FAS) – a passive fire retarding surface with water-only DIFFS

6.2.3.6 *The amount of water required should be predicated on the practical critical area (m²) multiplied by the appropriate application rate (3.75 L/min/m²) giving a discharge rate for water (in L/min). The discharge rate should be multiplied by the discharge duration to determine the total amount of water needed.*

6.2.3.7 *The discharge duration should be at least two minutes.*

6.2.3.8 *Complementary media should be in accordance with Table 6-3, for H2 operations.*

Note.— For helicopters with a fuselage length greater than 16 m and/or a fuselage width greater than 2.5 m, complementary media for H3 operations may be considered.

Purpose-built helidecks with primary media applied in a solid stream or a dispersed pattern through a fixed foam application system (FFAS) – a solid plate heliport

6.2.3.9 *The amount of water required for foam media production should be predicated on the practical critical area (m²) multiplied by the application rate (L/min/m²) giving a discharge rate for foam solution (in L/min). The discharge rate should be multiplied by the discharge duration to calculate the amount of water needed for foam production.*

6.2.3.10 *The discharge duration should be at least five minutes.*

6.2.3.11 *Complementary media should be in accordance with Table 6-3, H0 levels for helidecks up to and including 16.0 m and to H1/H2 levels for helidecks greater than 16.0 m. Helidecks greater than 24 m should adopt H3 levels.*

Note.— For guidance on the provision of additional hand-controlled foam branches for the application of aspirated foam, see the Heliport Manual (Doc 9261).

Issue 4	Revision 4	Oct. 2025	Page 102 of 121
----------------	-------------------	------------------	------------------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Purpose-built helidecks with primary media applied in a dispersed pattern through a fixed application system (FAS) – a passive fire-retarding surface with water-only DIFFS

6.2.3.12 *The amount of water required should be predicated on the practical critical area (m²) multiplied by the application rate (3.75 L/min/m²) giving a discharge rate for water (in L/min). The discharge rate should be multiplied by the discharge duration to calculate the amount of water needed.*

Note.— Sea-water may be used.

6.2.3.13 *The discharge duration should be at least three minutes.*

6.2.3.14 *Complementary media should be in accordance with Table 6-3, to H0 levels for helidecks up to and including 16.0 m and to H1/H2 levels for helidecks greater than 16.0 m. Helidecks greater than 24 m should adopt H3 levels.*

6.2.4 Response time

6.2.4.1. *At surface level heliports, the operational objective of the rescue and firefighting response should be to achieve response times not exceeding two minutes in optimum conditions of visibility and surface conditions.*

Note.— Response time is considered to be the time between the initial call to the rescue and firefighting service and the time when the first responding vehicle(s) (the service) is (are) in position to apply foam at a rate of at least 50 per cent of the discharge rate specified in Table 6-2.

6.2.4.2 *At elevated heliports, limited-sized surface level heliports and helidecks, the response time for the discharge of primary media at the required application rate should be 15 seconds measured from system activation. If rescue and firefighting personnel are needed, they should be immediately available on or in the vicinity of the heliport while helicopter movements are taking place.*

6.2.5 Rescue arrangements

6.2.5.1 *Rescue arrangements commensurate with the overall risk of the helicopter operation should be provided at the heliport.*

Note.— Guidance on the rescue arrangements, e.g. options for rescue and for personal protective equipment to be provided at a heliport, is given in ICAO Heliport Manual (Doc 9261).

6.2.6 Communication and alerting system

6.2.6.1 *A suitable alerting and/or communication system should be provided in accordance with the emergency response plan.*

6.2.7 Personnel

Note.— The provision of rescue and firefighting personnel may be determined by use of a task/resource analysis. Guidance is given in the Heliport Manual (Doc 9261).

Issue 4	Revision 4	Oct. 2025	Page 103 of 121
---------	------------	-----------	-----------------

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

6.2.7.1 Where provided, the number of rescue and firefighting personnel shall be sufficient for the required task.

6.2.7.2 Where provided, rescue and firefighting personnel shall be trained to perform their duties, and maintain their competence.

6.2.7.3 Rescue and firefighting personnel shall be provided with protective equipment.

6.2.8 Means of escape

6.2.8.1 Elevated heliports and helidecks shall be provided with a main access and at least one additional means of escape.

6.2.8.2 *Access points should be located as far apart from each other as is practicable.*

Note.— The provision of an alternative means of escape is necessary for evacuation and for access by rescue and firefighting personnel. The size of an emergency access/egress route may require consideration of the number of passengers and of special operations like Helicopter Emergency Medical Services (HEMS) that require passengers to be carried on stretchers or trolleys.



Appendix 1 AERONAUTICAL DATA QUALITY REQUIREMENTS

Table A1-1. Latitude and longitude

Latitude and longitude	Accuracy Data type	Integrity Classification
Heliport reference point	30 m surveyed/calculated	routine
Nav aids located at the heliport	3 m surveyed	essential
Obstacles in Area 3	0.5 m surveyed	essential
Obstacles in Area 2 (the part within the heliport boundary)	5 m surveyed	essential
Geometric centre of TLOF or FATO thresholds	1 m surveyed	critical
Helicopter ground taxiway centre line points and helicopter air taxiway points	0.5 m surveyed/calculated	essential
Helicopter ground taxiway intersection marking line	0.5 m surveyed	essential
Ground exit guidance line	0.5 m surveyed	essential
Apron boundaries (polygon)	1 m surveyed	routine
De-icing/anti-icing facility (polygon)	1 m surveyed	routine
Helicopter standpoints/INS checkpoints	0.5 m surveyed	routine

Note 1.— See Annex 15, Appendix 8, for graphical illustrations of obstacle data collection surfaces and criteria used to identify obstacles in the defined areas.

Note 2.— Implementation of Annex 15, provisions 10.1.4 and 10.1.6, concerning the availability, as of 12 November 2015, of obstacle data according to Area 2 and Area 3 specifications would be facilitated by appropriate advance planning for the collection and processing of such data.



Table A1-2. Elevation/altitude/height

Elevation/altitude/height	Accuracy Data type	Integrity Classification
Heliport elevation	0.5 m surveyed	essential
WGS-84 geoid undulation at heliport elevation position	0.5 m surveyed	essential
Heliport crossing height, PinS approaches	0.5 m calculated	essential
FATO threshold, for heliports with or without a PinS approach	0.5 m surveyed	essential
WGS-84 geoid undulation at FATO threshold, TLOF geometric centre, for heliports with or without a PinS approach	0.5 m surveyed	essential
FATO threshold, for heliports intended to be operated in accordance with Appendix 2	0.25 m surveyed	critical
WGS-84 geoid undulation at FATO threshold, TLOF geometric centre, for heliports intended to be operated in accordance with Appendix 2	0.25 m surveyed	critical
Helicopter ground taxiway centre line points and helicopter air taxiway points	1 m surveyed	essential
Obstacles in Area 2 (the part within the heliport boundary)	3 m surveyed	essential
Obstacles in Area 3	0.5 m surveyed	essential
Distance measuring equipment/precision (DME/P)	3 m surveyed	essential

Note 1.— See Annex 15, Appendix 8, for graphical illustrations of obstacle data collection surfaces and criteria used to identify obstacles in the defined areas.

Note 2.— Implementation of Annex 15, provisions 10.1.4 and 10.1.6, concerning the availability, as of 12 November 2015, of obstacle data according to Area 2 and Area 3 specifications would be facilitated by appropriate advance planning for the collection and processing of such data.

Table A1-3. Declination and magnetic variation

Declination/variation	Accuracy Data type	Integrity Classification
Heliport magnetic variation	1 degree surveyed	essential
ILS localizer antenna magnetic variation	1 degree surveyed	essential
MLS azimuth antenna magnetic variation	1 degree surveyed	essential

Table A1-4. Bearing

Bearing	Accuracy Data type	Integrity Classification
ILS localizer alignment	1/100 degree surveyed	essential
MLS zero azimuth alignment	1/100 degree surveyed	essential
FATO bearing (true)	1/100 degree surveyed	routine

Table A1-5. Length/distance/dimension

Length/distance/dimension	Accuracy Data type	Integrity Classification
FATO length, TLOF dimensions	1 m surveyed	critical
Clearway length and width	1 m surveyed	essential
Landing distance available	1 m surveyed	critical
Take-off distance available	1 m surveyed	critical
Rejected take-off distance available	1 m surveyed	critical
Helicopter ground or air taxiway/taxi-route width	1 m surveyed	essential
ILS localizer antenna-FATO end, distance	3 m calculated	routine
ILS glide slope antenna-threshold, distance along centre line	3 m calculated	routine
ILS marker-threshold distance	3 m calculated	essential
ILS DME antenna-threshold, distance along centre line	3 m calculated	essential
MLS azimuth antenna-FATO end, distance	3 m calculated	routine
MLS elevation antenna-threshold, distance along centre line	3 m calculated	routine
MLS DME/P antenna-threshold, distance along centre line	3 m calculated	essential

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Appendix 2. International SARP

for standards and recommended practices for instrument heliports with non-precision and/or precision approaches and instrument departures

1. General

Introductory Note 1 — KCASR 14, Volume II, contains Standards and Recommended Practices (specifications) that prescribe the physical characteristics and obstacle limitation surfaces to be provided for at heliports, and certain facilities and technical services normally provided at a heliport. It is not intended that these specifications limit or regulate the operation of an aircraft.

Introductory Note 2 — The specifications in this appendix describe additional conditions beyond those found in the main sections of KCASR 14, Volume II, that apply to instrument heliports with non-precision and/or precision approaches. All specifications contained within the main chapters of KCASR 14, Volume II, are equally applicable to instrument heliports, but with reference to further provisions described in this Appendix.

2. Heliport Data

2.1. Heliport elevation

The elevation of the TLOF and/or the elevation and geoid undulation of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority to the accuracy of:

- (a) one-half metre or foot for non-precision approaches; and
- (b) one-quarter metre or foot for precision approaches.

Note — Geoid undulation must be measured in accordance with the appropriate system of coordinates.

2.2. Heliport dimensions and related information

The following additional data shall be measured or described, as appropriate, for each facility provided on an instrument heliport:

- (a) distances to the nearest metre or foot of localizer and glide path elements comprising an instrument landing system (ILS) or azimuth and elevation antenna of a microwave landing system (MLS) in relation to the associated TLOF or FATO extremities.

3. Physical Characteristics

3.1. Surface-level and elevated heliports

Safety areas

A safety area surrounding an instrument FATO shall extend:

- (a) laterally to a distance of at least 45 m on each side of the centre line; and
- (b) longitudinally to a distance of at least 60 m beyond the ends of the FATO.

Note — See Figure A2-1.

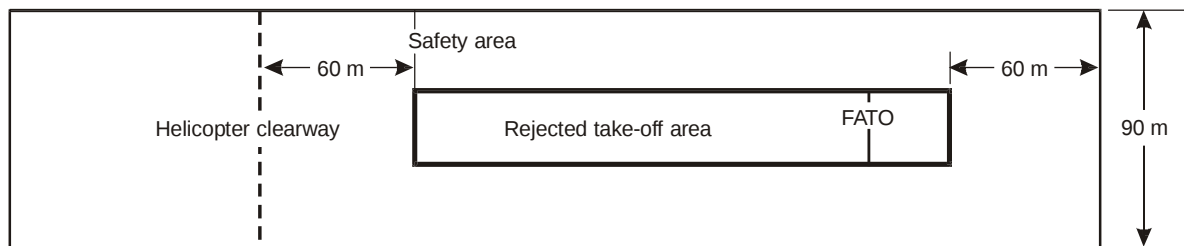


Figure A2-1. Safety area for instrument FATO

4. Obstacle Environment

4.1. Obstacle limitation surfaces and sectors

Approach surface

Characteristics:

The limits of an approach surface shall comprise:

- (a) an inner edge horizontal and equal in length to the minimum specified width of the FATO plus the safety area, perpendicular to the centre line of the approach surface and located at the outer edge of the safety area;
- (b) two side edges originating at the ends of the inner edge;
 - (1) for an instrument FATO with a non-precision approach, diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO;
 - (2) for an instrument FATO with a precision approach, diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO, to a specified height above FATO, and then diverging uniformly at a specified rate to a specified final width and continuing thereafter at that width for the remaining length of the approach surface; and
- c) an outer edge horizontal and perpendicular to the centre line of the approach surface and at a specified height above the elevation of the FATO.

4.2. Obstacle limitation requirements

4.2.1. The following obstacle limitation surfaces shall be established for an instrument FATO with a non-precision and/or precision approach:

- (a) take-off climb surface;
- (b) approach surface; and
- (c) transitional surfaces.

Note — See Figure A2-2 to A2-5.

4.2.2. The slopes of the obstacle limitation surfaces shall not be greater than, and their other dimensions not less than, those specified in Tables A2-1 to A2-3.

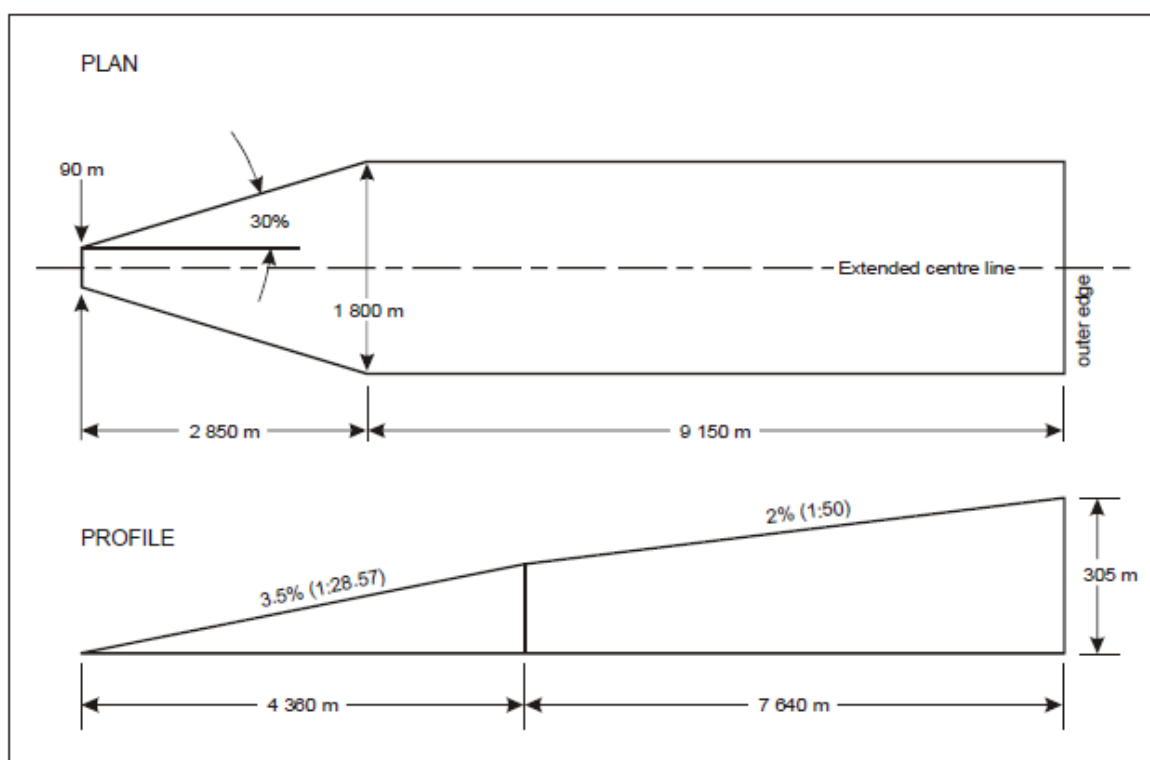


Figure A2-2. Take-off climb surface for instrument FATO

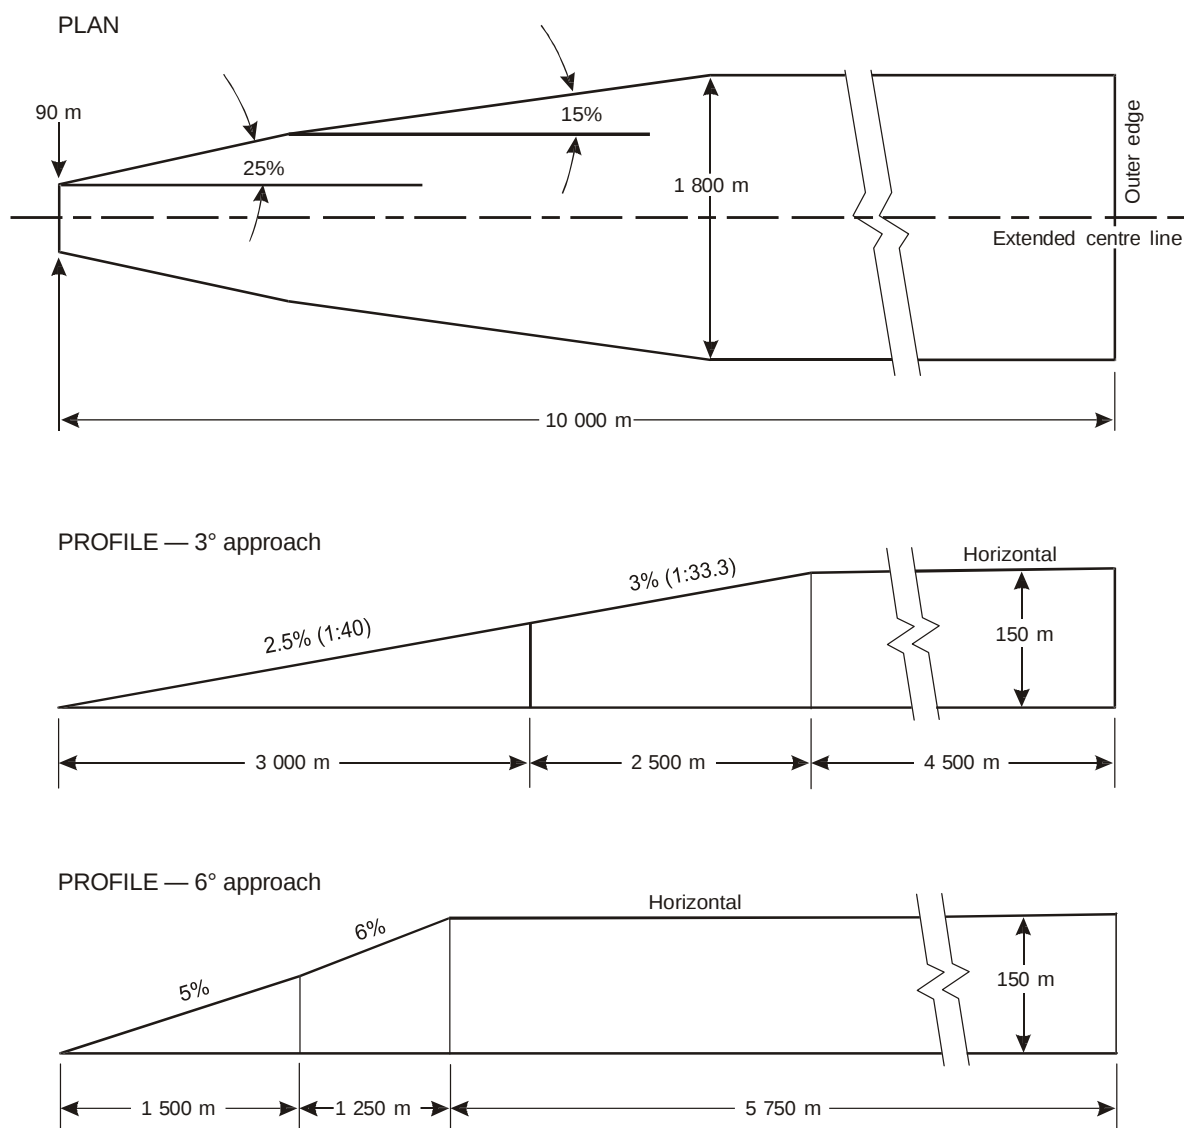


Figure A2-3. Approach surface for precision approach FATO

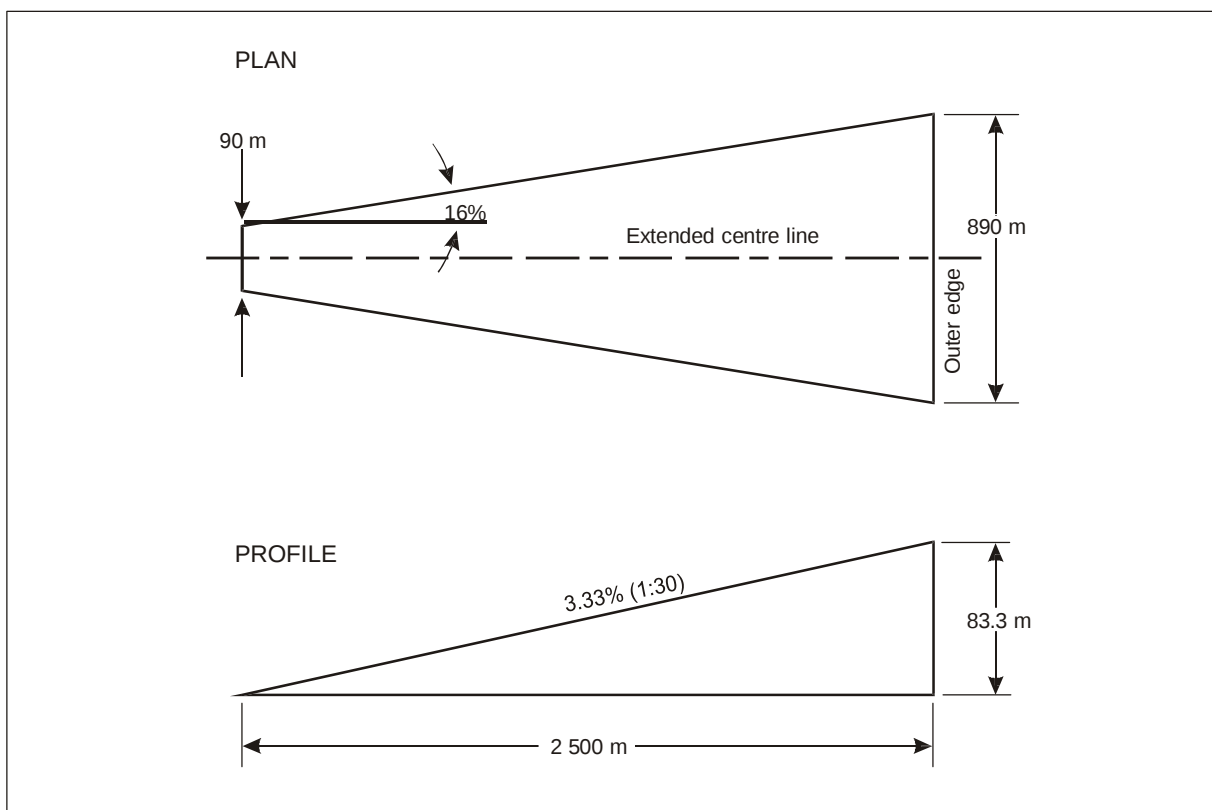
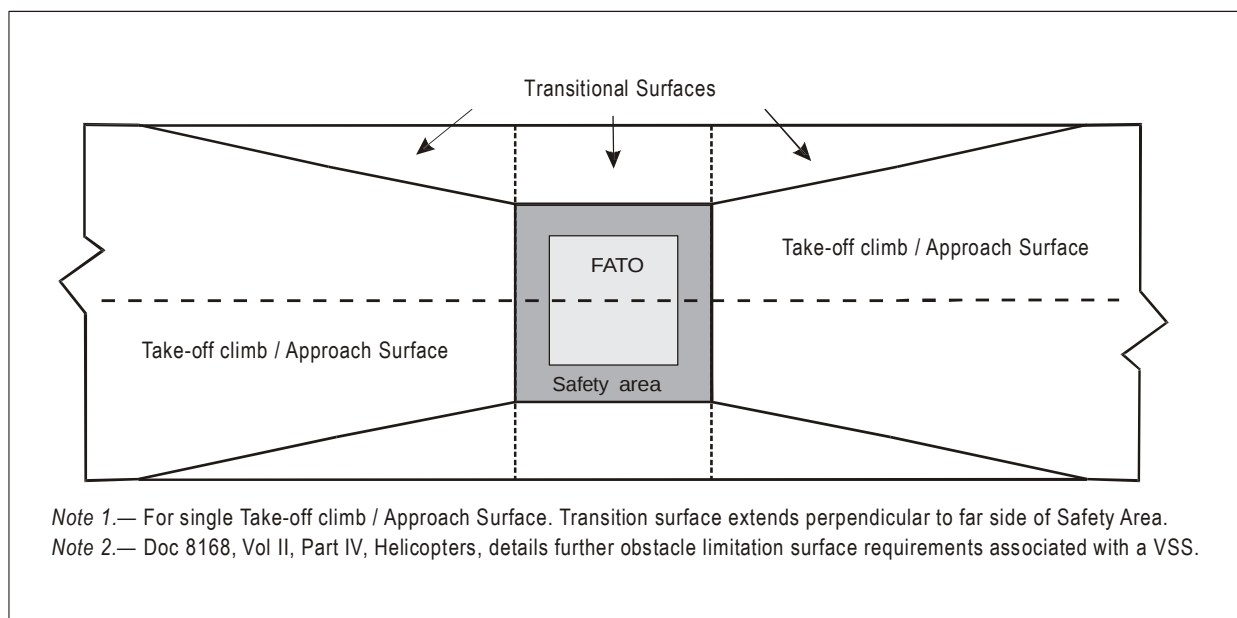


Figure A2-4. Approach surface for non-precision approach FATO



**Figure A2-5. Transitional surfaces for an instrument FATO with a non-precision
and/or precision approach**

APP 2-5

**Table A2-1. Dimensions and slopes of obstacle limitation surfaces
Instrument (Non-precision) FATO**

<i>SURFACE and DIMENSIONS</i>		
APPROACH SURFACE		
Width of inner edge		Width of safety area
Location of inner edge		boundary
First Section		
Divergence	— day	16%
	— night	
Length	— day	2 500 m
	— night	
Outer width	— day	890 m
	— night	
Slope (maximum)		3.33%
Second Section		
Divergence	— day	—
	— night	
Length	— day	—
	— night	
Outer width	— day	—
	— night	
Slope (maximum)		—
Third Section		
Divergence		—
Length	— day	—
	— night	
Outer width	— day	—
	— night	
Slope (maximum)		—
TRANSITIONAL		
Slope		20%
Height		45 m



**Table A2-2. Dimensions and slopes of obstacle limitation surfaces
Instrument (Precision) FATO**

<i>Surface and dimensions</i>	<i>3° approach</i>				<i>6° approach</i>			
	<i>Height above FATO</i>				<i>Height above FATO</i>			
	<i>90 m (300 ft)</i>	<i>60 m (200 ft)</i>	<i>45 m (150 ft)</i>	<i>30 m (100 ft)</i>	<i>90 m (300 ft)</i>	<i>60 m (200 ft)</i>	<i>45 m (150 ft)</i>	<i>30 m (100 ft)</i>
APPROACH SURFACE								
Length of inner edge	90 m	90 m	90 m	90 m	90 m	90 m	90 m	90 m
Distance from end of FATO	60 m	60 m	60 m	60 m	60 m	60 m	60 m	60m
Divergence each side to height above FATO	25%	25%	25%	25%	25%	25%	25%	25%
Distance to height above FATO	1 745 m	1 163 m	872 m	581 m	870 m	580 m	435 m	290 m
Width at height above FATO	962 m	671 m	526 m	380 m	521 m	380 m	307.5 m	235 m
Divergence to parallel section	15%	15%	15%	15%	15%	15%	15%	15%
Distance to parallel section	2 793 m	3 763 m	4 246 m	4 733 m	4 250 m	4 733 m	4 975 m	5 217 m
Width of parallel section	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m
Distance to outer edge	5 462 m	5 074 m	4 882 m	4 686 m	3 380 m	3 187 m	3 090 m	2 993 m
Width at outer edge	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m	1 800 m
Slope of first section	2.5% (1:40)	2.5% (1:40)	2.5% (1:40)	2.5% (1:40)	5% (1:20)	5% (1:20)	5% (1:20)	5% (1:20)
Length of first section	3 000 m	3 000 m	3 000 m	3 000 m	1 500 m	1 500 m	1 500 m	1 500 m
Slope of second section	3% (1:33.3)	3% (1:33.3)	3% (1:33.3)	3% (1:33.3)	6% (1:16.66)	6% (1:16.66)	6% (1:16.66)	6% (1:16.66)
Length of second section	2 500 m	2 500 m	2 500 m	2 500 m	1 250 m	1 250 m	1 250 m	1 250 m
Total length of surface	10 000 m	10 000 m	10 000 m	10 000 m	8 500 m	8 500 m	8 500 m	8 500 m
TRANSITIONAL								
Slope	14.3%	14.3%	14.3%	14.3%	14.3%	14.3%	14.3%	14.3%
Height	45 m	45 m	45 m	45 m	45 m	45 m	45 m	45 m

Table A2-3. Dimensions and slopes of obstacle limitation surfaces

STRAIGHT TAKE-OFF

<i>SURFACE and DIMENSIONS</i>		<i>Instrument</i>
TAKE-OFF CLIMB		
Width of inner edge		90 m Boundary
Location of inner edge		of end of clearway
First Section:		
Divergence	— day	30%
	— night	
Length	— day	2 850 m
	— night	
Outer width	— day	1 800 m
	— night	
Slope (maximum)		3.5%
Second Section:		
Divergence	— day	parallel
	— night	
Length	— day	1 510 m
	— night	
Outer width	— day	1 800 m
	— night	
Slope (maximum)		3.5%*
Third Section:		
Divergence		parallel
Length	— day	7 640 m
	— night	
Outer width	— day	1 800 m
	— night	
Slope (maximum)		2%
* This slope exceeds the maximum mass one-engine-inoperative climb gradient of many helicopters which are currently operating.		

5. Visual Aids

5.1. Lights

Approach Lighting Systems

- 5.1.1. Where an approach lighting system is provided for a non-precision FATO, the system should not be less than 210 m in length.
- 5.1.2. The light distribution of steady lights should be as indicated in Figure 5-11, Illustration 2 except that the intensity should be increased by a factor of three for a non-precision FATO.

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Table A2-4. Dimensions and slopes of the obstacle protection surface

SURFACE AND DIMENSIONS	NON-PRECISION FATO	
Length of inner edge	Width of safety area	
Distance from end of FATO	60 m	
Divergence	15%	
Total length	2 500 m	
Slope	PAPI	$A^a - 0.57^\circ$
	HAPI	$A^b - 0.65^\circ$
	APAPI	$A^a - 0.9^\circ$
a. As indicated in Annex 14, Volume I, Figure 5-19. b. The angle of the upper boundary of the “below slope” signal.		

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Appendix 3 Guidance for Unlicensed Helipads

In Kuwait, some helipads used might be classified as unlicensed helipads. The following guidance reflects minimum standards for such helipads.

1. Guidance on procedures to be used

The following guidance should be followed for the construction and operation of a helipad:

- 1.1. The promoter planning to build a helipad should send a formal request to the Kuwait DGCA for their intention to operate a helipad. The request should also consist of a technical proposal for the construction of a helipad.
- 1.2. The Kuwait DGCA will then examine the request. Operation clearance must be obtained from the ATM Section regarding location of the site. There are many areas in which helicopter operation is prohibited as per the AIP.
- 1.3. A site visit of the proposed location for the helipad will then be carried out by Kuwait DGCA and a representative of the helicopter operator to determine the suitability of the site for helicopter operation.
- 1.4. Clearance for the construction of the helipad will be given if the Kuwait DGCA is satisfied that the conditions set in the specifications of a helipad can be met, specially the FATO should not be obstructed.
- 1.5. Final clearance for helicopter operations at the helipad will only be given when the Kuwait DGCA is satisfied after a site visit that all the required specifications for a helipad have been met.
- 1.6. The helipad operator must submit a plan showing the helipad including FATO and all obstacles of the helipad as well as their geometric coordinates and the elevation of the helipad. These details will then be communicated to the AIS to be published in the AIP.
- 1.7. The environmental impact may need to be assessed in accordance with national laws and environmental statements might be required by the appropriate Ministry.
- 1.8. The helipad operator must ensure that the requirements and facilities should be maintained at all times during helicopter operations.
- 1.9. The Kuwait DGCA will carry out regular site visits to ensure compliance with requirements.

2. Specification of a Helipad


- 2.1. A circular area of at least 20 metres in diameter. This should be levelled and flat. The surface of this area (Helipad) can be either concrete, asphalt or grass but not sand or soil. The surface must be marked by a white circle and a white “H” centered in the middle of the circle. A Touchdown/Lift Off (TLOF) area of 4 metres x 4 metres is required in the middle of the circle. The TLOF area should be a hard surface, capable of supporting a weight of 5000 kg. Dimensions of ‘H’ marking are shown in paragraph 2.12.
- 2.2. A FATO (Final Approach and Take-Off) area in the form of a corridor of at least 40 metres wide on a distance 250 metres each end from the 20m circular area, the direction of which should be aligned with the normal prevailing wind direction. These corridors start from the 20m circular area and rise on a slope/gradient of 12.5% or 1:8 and must be free from obstacles.
- 2.3. The TLOF area should be free from obstructions. Clear areas for an emergency landing in case of engine failure should be provided in the near vicinity of the helipad.
- 2.4. A windsock placed at a safe distance from the helipad and visible to the pilot.
- 2.5. There must be fire extinguishers on site consisting of:

Issue 4	Revision 4	Oct. 2025	Page 117 of 121
----------------	-------------------	------------------	------------------------


3 bottles of 9kg each of dry chemical extinguishant; and
2 bottles of 4.5kg each of CO₂ (carbon dioxide).

These should be sheltered so as to avoid damage due to exposure to atmospheric conditions.

- 2.6. A safety Notice Board (in English and Arabic) near the helipad is required and should be clearly visible to the passengers. Notice Board should have security instructions. This board should be outside the approach/take-off corridor and it should be 1-1.5 metres high and 1-1.15 wide.
- 2.7. There should be a safe waiting place for the passengers.
- 2.8. A security officer at the helipad each time the helicopter is operating there.
- 2.9. Good communications facilities between all emergency services. A contact phone number an operator can use to notify for the arrival time of helicopter of the helipad and contact phone number of person responsible for the helipad are required.
- 2.10. All staff involved in helicopter operations should be given appropriate training in first aid, handling of fire extinguishers etc.
- 2.11. Depending on local regulations, all helipad projects may require an EIA (Environment Impact Assessment) licence from the appropriate Ministry.
- 2.12. The dimensions of 'H' marking should be as shown. It should be white in colour and the cross arm of the 'H' marking should be oriented at right angles to the preferred final approach direction.

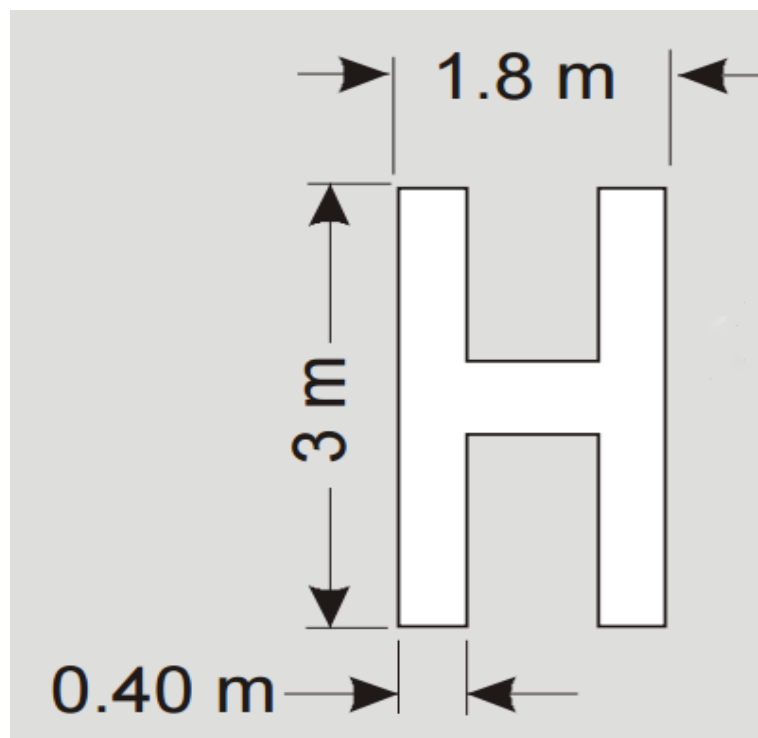

- 2.13. A Wind Direction Indicator (Windsock) should be either white or Orange and should be able to turn easily with the wind. It should be positioned about 3 metres from the ground near the helipad but not in the TLOF.

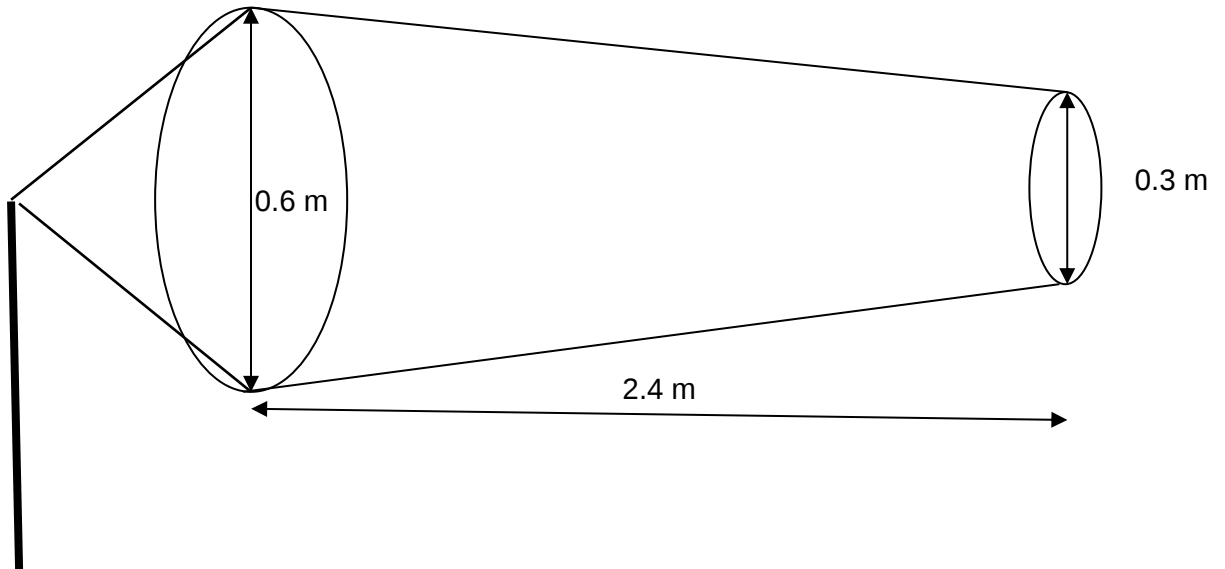

Appendix 3 Cross Reference

between KCASR 14 Volume II and ICAO Annex 14 Volume II and other provisions

Notes:

1. As a policy for Heliports, the Kuwait DGCA has adopted ICAO Standards and Recommended Practices without change. However, in a few cases, some Recommended Practices may have been upgraded to Standards.
2. In some cases, material has been added for which there is no ICAO SARP. In these cases, the source of the material has been listed but this material does not constitute a 'Difference' that has to be notified by the Kuwait DGCA to ICAO under its obligations under Article 38 of the Chicago Convention, and has been marked as 'n/a'.

KCASR 14	Source	Title	Difference
Chapter 1		General	
1.1	Ann 14 VI – Plus	Definitions	No
1.2	CAAi	Applicability	n/a
1.3	CAAi	Purpose	n/a
1.4	CAAi	ICAO Ann 14 Compliance	n/a
1.5	CAAi	Exemptions	n/a
1.6	Ann 14 Vol II	Common Reference systems	No
Chapter 2		Heliport data	
2.1 – 2.6	Ann 14 Vol II		No
Chapter 3		Physical Characteristics	
3.1 – 3.4	Ann 14 Vol II		No
Chapter 4		Obstacle Environment	
4.1 – 4.2	Ann 14 Vol II		No
Chapter 5		Visual Aids	
5.1 – 5.3	Ann 14 Vol II		No
Chapter 6		Heliport services	
6.1	Ann 14 Vol II		No
Appendix 1		Aeronautical data quality requirements	
	Ann 14 Vol II		No
Appendix 2		International Standards and Recommended Practices for instrument heliports with non-precision and/or precision approaches and instrument departures	
	Ann 14 Vol II		No
Appendix 3		Guidance for unlicensed helipads	
	ICAO Guidance		n/a

Kuwait Civil Aviation Safety Regulations		KCASR 14 – Aerodromes
		Volume II – Aerodromes Heliports

Appendix 4 – Procedures for Helipad Certification

1. An applicant for the grant or amendment of a helipad certificate shall apply to Kuwait DGCA by supplying:

- (a) the applicant's name and address;
- (b) the helipad's name and location;
- (c) the name and position of the accountable manager;
- (d) the helipad Manual required;
- (e) evidence that the requirements in paragraph (b) have been met;
- (f) such other particulars relating to the applicant and the helipad as may be required by the Kuwait DGCA;
- (g) Payment of any applicable fee required by the appropriate requirements.

2. The applicant for a helipad certificate shall satisfy the Kuwait DGCA that:

- (a) the applicant and his/her staff have the necessary competence and experience to operate and maintain the helipad;
- (b) the helipad Manual prepared for the helipad contains all of the relevant information;
- (c) the helipad facilities, services and equipment meet the required standards;
- (d) the helipad operating procedures ensure the safe operations of aircraft and/or the safety of air navigation;
- (e) acceptable safety and quality management systems are in place to ensure continued compliance with, and the adequacy of, the requirements of this KCASR and the safe operation of the helipad;
- (f) appropriate arrangements are in place for the provision of:
 - (i) the Air Traffic Services;
 - (ii) the Aeronautical Information Service; and
 - (iii) the Meteorological Service
- (g) The Rescue and Fire Fighting Services provided for the helipad meet the requirements of KCASR 14, Vol. I, paragraphs 9.2.1 through 9.2.46 and Chapter

12 (14.40 – 14.45)

Note: — The validation of certificate is for 2 years.

END

Issue 4	Revision 4	Oct. 2025	Page 121 of 121
----------------	-------------------	------------------	------------------------

Affected Pages from Last Update

#	Page	Amendments
1.	3	[TABLE] 5 Oct 2025 Based on NPA 2025-20 - (Updated to ICAO annex 14 – Vol II Amendment 10)
2.	5	AIP Aeronautical Information Publication
3.	5	HFM Helicopter flight manual (also known as RFM)
4.	5	IDF Initial departure fix
5.	5	OCS Obstacle clearance surface
6.	5	PRP Point-in-space reference point
7.	5	RFF Rescue and firefighting
8.	5	RFFS Rescue and firefighting service
9.	5	RFM Rotorcraft flight manual (also known as HFM)
10.	10	Note 1.— KCASR 14, Volume II, contains Standards and Recommended Practices (specifications) that prescribe the physical characteristics and obstacle limitation surfaces to be provided for at heliports, and certain facilities and technical services normally provided at a heliport. It is not intended that these specifications limit or regulate the operation of an aircraft.
11.	10	Note 2.— When designing a heliport, a design helicopter, which represents the largest dimensions; the greatest maximum take-off mass (MTOM); and the most critical obstacle avoidance criteria of the population of helicopters the heliport is intended to serve, is taken into account. For guidance on establishing a design helicopter see the Heliport Manual (Doc 9261).
12.	10	Ascent/Descent surface. An inclined plane or complex surface that slopes upward from the centre of the FATO to indicate the path helicopters are expected to follow when vertical procedures are utilized – it can consist of:
13.	10	an inverted triangle when there is no lateral component; or
14.	10	an inverted conical surface when there is a lateral component.
15.	11	Initial departure fix (IDF). The terminal fix for the visual segment and the fix where the instrument phase of the PinS departure begins.
16.	12	Initial departure fix (IDF). The terminal fix for the visual segment and the fix where the instrument phase of the PinS departure begins.
17.	12	Point-in-space approach (PinS): The Point-in-space approach is based on GNSS and is an An approach procedure designed for helicopters only that includes both a visual and an instrument segment. It is aligned with a reference point located to permit subsequent flight manoeuvring or approach and landing using visual manoeuvring in adequate visual conditions to see and avoid obstacles.
18.	12	Point-in-space (PinS) departure. A departure procedure designed for helicopters only that includes both a visual and an instrument segment.
19.	12	Point-in-space (PinS) reference point (PRP). Reference point for the point-in-space approach as identified by the latitude and longitude of the MAPt.
20.	12	Point-in-space (PinS) visual segment: This is the The segment of a helicopter PinS approach procedure from the between a point (MAPt or IDF) and heliport, to the landing location for a PinS “proceed visually” procedure. This visual segment connects the Point-in-space (PinS) to the landing location.
21.	12	Note — The procedure design criteria for a PinS approach and the detailed design requirements for a visual segment procedures are established in ICAO Procedures for Air Navigation Services — Aircraft Operations, Volume II (PANS-OPS, Doc 8168- Volume II).
22.	13	Vertical procedures. Take-off and landing procedures that include an initial vertical or steep climb and a final vertical or steep descent profile. The profile may or may not include a lateral component.
23.	13	Certification of heliports (Applicable as of 26 November 2026)
24.	13	Note.— The intent of these specifications is to ensure the establishment of a regulatory regime so that compliance with the specifications in this Annex can be effectively enforced. It is recognized that the methods of ownership, operation and surveillance of heliports differ among States. The most effective and

#	Page	Amendments
		transparent means of ensuring compliance with applicable specifications is the availability of a separate safety oversight entity and a well-defined safety oversight mechanism with support of appropriate legislation to be able to carry out the function of safety regulation of heliports. When a heliport is granted a certificate, it signifies to aircraft operators and other organizations operating on the heliport that, at the time of certification, the heliport meets the specifications regarding the facility and its operation, and that it has, according to the certifying authority, the capability to maintain these specifications for the period of validity of the certificate. The certification process also establishes the baseline for continued monitoring of compliance with the specifications. Information on the status of certification of heliports would need to be provided to the appropriate aeronautical information services for promulgation in the Aeronautical Information Publication (AIP). See 2.6.1 and the PANS-AIM (Doc 10066), Appendix 2, AD 1.5 (1).
25	14	Kuwait DGCA/ASD shall certify heliports used for international operations in accordance with the specifications contained in this Part as well as other relevant ICAO specifications through an appropriate regulatory framework.
26	14	Note 1.— In addition to certifying heliports intended to be used by helicopters in international civil aviation, certifying heliports that are open to public use is deemed also to be beneficial for the safety, regularity and efficiency of these operations.
27	14	Note 2.— Guidance on heliport certification, including the interrelations between the aerodrome and heliport certification processes in case of co-location on an aerodrome, can be found in the Heliport Manual (Doc 9261).
28	14	The regulatory framework shall include the establishment of criteria and procedures for the certification of heliports.
29	14	Note.— Guidance on a regulatory framework is given in the Heliport Manual (Doc 9261).
30	14	As part of the certification process, Kuwait DGCA/ASD shall ensure that a heliport manual which will include all pertinent information on the heliport site, facilities, services, equipment, operating procedures, organization and management including a safety management system (SMS), is submitted by the applicant for approval/acceptance prior to granting the heliport certificate.
31	14	Note 1.— Guidance on the contents of a heliport manual, including procedures for its submission and approval/acceptance, verification of compliance and granting of a heliport certificate, can be found in the Heliport Manual (Doc 9261).
32	14	Note 2.— Annex 19 — Safety Management contains SMS provisions applicable to certified heliports. Overarching guidance on SMS is contained in the Safety Management Manual (Doc 9859) with sector-specific guidance found in the Heliport Manual (Doc 9261).
33	14	4 ICAO Annex 14 compliance
34	15	5 Exemptions
35	18	helicopter taxiway and helicopter taxi route— designation, width, surface type;
36	18	approach surface — when elevated, the height of the inner edge above the FATO;
37	18	Note.— When the take-off climb surface is elevated, its inner edge and height will be the outer edge of the elevated helicopter clearway as specified in 4.1.14.
38	18	helicopter clearway — length, ground profile; or, when elevated, height above the FATO, length and width; and
39	18	visual aids for approach procedures, marking and lighting of FATO, TLOF, helicopter ground taxiways, helicopter air taxiways and helicopter stands.
40	19	information on the status of certification of heliports and information on heliport conditions;
41	25	when solid, a surface which: is contiguous and flush with the FATO and safety area ; is resistant to the effects of rotor downwash; and is free of hazards if a forced landing be is required; or ;
42	25	when elevated, clearance above all obstacles.
43	25	

#	Page	Amendments
		When a helicopter clearway is provided, the inner edge shall be located: beyond the end of the FATO.
44	25	<u>at the outer edge of the safety area; or</u>
45	25	<u>when elevated, directly above, or directly below, the outer edge of the safety area.</u>
46	25	<u>Note.— Guidance on designing a clearway that is below the FATO of an elevated heliport/helideck is provided in Heliport Manual (Doc 9261).</u>
47	37	The specifications in paragraphs 3.23.14 and 3.23.15 shall be applicable for helidecks completed on or after 1 January 2012.
48	37	A TLOF may be any shape but, <u>subject to an appropriate risk assessment</u> , shall be of sufficient size to contain:
49	37	for helicopters with an MTOM of more than 3175 kg, an area within which can be accommodated a circle of diameter not less than 1 D of the largest helicopter the helideck is intended to serve; and for helicopters with an MTOM of 3175 kg or less, an area within which can be accommodated a circle of diameter not less than 0.83 D of the largest helicopter the helideck is intended to serve.
50	37	<u>Note.— Further guidance on factors to inform the risk assessment are given in the Heliport Manual (Doc 9261).</u>
51	37	For helicopters with a MTOM of 3175 kg or less, the TLOF should be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the helideck is intended to serve.
52	37	No fixed object shall be permitted around the edge of the TLOF except for frangible objects, which, because of their function, must be located thereon.
53	39	No fixed object shall be permitted around the edge of the TLOF except for frangible objects, which, because of their function, must be located thereon.
54	41	<u>Note 1.— A full description, detailed explanation and visual depiction of the obstacle limitation surfaces and sectors is provided in the Heliport Manual (Doc 9261).</u>
55	41	<u>Note 2.— For guidance on the provision of vertical procedures, see the Heliport Manual (Doc 9261).</u>
56	41	<u>Note 3.— For guidance on the provision of elevated helicopter clearways and elevated surfaces, see the Heliport Manual (Doc 9261).</u>
57	41	<u>Note 4.— See Table 4-1 for dimensions and slopes of surfaces.</u>
58	41	An inclined plane or a combination of planes or, when a turn or turns are is involved, a complex surface sloping upwards from the inner edge end of the safety area and centred on a line passing through the centre of the FATO.
59	41	Note — See Figures 8, 9, 10 & 11 for depiction of surfaces. See Table 2 for dimensions and slopes of surfaces. Characteristics:
60	41	an inner edge, horizontal and <u>perpendicular to the centre line of the approach surface, with a minimum width</u> equal in length to the minimum specified width/diameter of the FATO plus the safety area, perpendicular to the centre line of the approach surface and located at
61	41	the outer edge of the safety area; <u>or</u>
62	41	<u>when vertical procedures are being utilized, directly above the outer edge of the safety area.</u>
63	41	two side edges originating at the ends of the inner edge diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and:
64	41	an outer edge horizontal and perpendicular to the centre line of the approach surface and at: a specified
65	41	<u>1) height of 152 m (500 ft) above the elevation of the FATO; Or</u>
66	41	<u>2) when a PinS approach procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.</u>

#	Page	Amendments
67	41	The elevation of the inner edge shall be:
68	41	a) the The elevation of the FATO at the point on the inner edge that is intersected by the centre line of the approach surface; or, — For heliports intended to be used by helicopters operated in performance class 1 and when approved by an appropriate authority, the origin of the inclined plane may be raised directly above the FATO.
69	41	<u>when vertical procedures are being utilized; the level at which obstacle clearance is achieved.</u>
70	42	In the case of an approach surface involving a turn <u>or turns</u> , the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight approach surface.
71	42	Note — See Figure 4-1 12 . <u>For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).</u>
72	42	<u>Figure 4-1. Curved approach and take-off climb surface for all FATOs</u>
73	42	In the case of an approach surface involving a turn, the surface shall not contain more than one curved portion. Where a curved portion of an approach surface is provided, the sum of the radius of arc defining the centre line of the approach surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.
74	42	<u>Any variation in the direction of the centre line of an approach surface shall be designed so as not to necessitate a turn radius less than 270 m.</u>
75	42	<u>Note — For heliports intended to be used by helicopters operated in performance class 2 and 3, it is good practice for the approach paths to be selected so as to permit safe forced landing or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimised. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.</u>
76	43	Transitional surface
77	43	<u>Description: A complex surface along the side of the safety area and helicopter clearway, when provided, and part of the side of the approach or take-off climb surface, that slopes upwards and outwards to a predetermined height.</u>
78	43	<u>Characteristics: The limits of a transitional surface shall comprise:</u>
79	43	<u>a lower edge beginning at a point on the side of the approach or take-off climb surface at a specified height above the lower edge extending down the side of the approach or take-off climb surface to the inner edge and from there along the length of the side of the helicopter clearway, when provided, and safety area, parallel to the centre line of the FATO; and</u>
80	43	<u>an upper edge located at:</u>
81	43	<u>45 m (150 ft) above the FATO; or</u>
82	43	<u>when vertical procedures are being utilized; 15 m (50 ft) above the elevation of the upper edge of the ascent/descent surface.</u>
83	43	<u>The elevation of a point on the lower edge shall be:</u>
84	43	<u>along the side of the approach or take-off climb surface — equal to the elevation of the approach or take-off climb surface at that point; then</u>
85	43	<u>if provided, along the helicopter clearway — equal to the elevation of the helicopter clearway; and</u>
86	43	<u>along the safety area — equal to the elevation of the FATO.</u>
87	43	<u>The slope of the transitional surface shall be measured in a vertical plane at right angles to the centre line of the FATO.</u>
88	43	<u>Take-off climb surface</u>
89	43	<u>Description. An inclined plane, a combination of planes or, when a turn or turns are involved, a complex surface sloping upwards from the end of the safety area, or of the helicopter clearway, when provided, and centred on a line passing through the centre of the FATO.</u>
90	43	<u>Characteristics. The limits of a take-off climb surface shall comprise:</u>

#	Page	Amendments
91	43	<u>(a) an inner edge, horizontal and perpendicular to the centre line of the take-off climb surface, with a minimum width of the width/diameter of: 1) when located at the outer edge of the safety area or helicopter clearway, the FATO plus the safety area; or</u>
92	43	<u>when located at the outer edge of the elevated helicopter clearway, the elevated helicopter clearway.</u>
93	43	<u>two side edges originating at the ends of the inner edge and diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and</u>
94	43	<u>an outer edge horizontal and perpendicular to the centre line of the take-off climb surface;</u>
95	44	<u>a height of 152 m (500 ft) above the elevation of the FATO; or</u>
96	44	<u>when a PinS departure procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.</u>
97	44	<u>The elevation of the inner edge shall be:</u>
98	44	<u>the elevation of the FATO at the point on the inner edge that is intersected by the centre line of the take-off climb surface; or.</u>
99	44	<u>when located at the outer edge of the helicopter clearway, the elevation of the helicopter clearway.</u>
10	44	<u>In the case of a straight take-off climb surface, the slope shall be measured in the vertical plane containing the centre line of the surface</u>
10	44	<u>In the case of a take-off climb surface involving a turn or turns, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight take-off climb surface.</u>
10	44	<u>Note.— See Figure 4-1. For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).</u>
10	44	<u>Where a curved portion of a take-off climb surface, that does not have its inner edge at the outer edge of a clearway, is provided, the sum of the radius of arc defining the centre line of the take-off climb surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.</u>
10	44	<u>Note.— Helicopter take-off performance is reduced in a turn and as such a straight portion along the take-off climb surface prior to the start of the curve allows for acceleration.</u>
10	44	<u>Any variation in the direction of the centre line of a take-off climb surface shall be designed so as not to necessitate a turn of radius less than 270 m.</u>
10	44	<u>Note .— For heliports intended to be used by helicopters operated in performance class 2 or 3, it is good practice for the departure paths to be selected so as to permit safe forced landings or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimized. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.</u>
10	44	<u>Obstacle-free sector/surface — helidecks</u>
10	44	<u>Description: A complex surface originating at and extending from, a reference point on the edge of the FATO of a helideck. In the case of a TLOF of less than 1 D, the reference point shall be located not less than 0.5 D from the centre of the TLOF.</u>
10	44	<u>Characteristics. An obstacle-free sector/surface shall subtend an arc of specified angle.</u>
11	44	<u>A helideck obstacle-free sector shall comprise of two components, one above and one below helideck level:</u>
11	44	<u>Note.— See Figure 4-2.</u>
11	44	<u>Above helideck level: The surface shall be a horizontal plane level with the elevation of the helideck surface that subtends an arc of at least 210 degrees with the apex located on the periphery of the D circle extending outwards to a distance that will allow for an unobstructed departure path appropriate to the helicopter the helideck is intended to serve.</u>
11	44	<u>Below helideck level: Within the (minimum) 210-degree arc, the surface shall additionally extend downward from the edge of the FATO below the elevation of the helideck to water level for an arc of not less than 180 degrees that passes through the centre of the FATO and outwards to a distance that will allow for safe clearance from the obstacles below the helideck in the event of an engine failure for the type of helicopter the helideck is intended to serve.</u>

#	Page	Amendments																																																																																																																					
11	45	Note — For both the above obstacle-free sectors for helicopters operated in performance class 1 or 2, the horizontal extent of these distances from the helideck will be compatible with the one-engine-inoperative capability of the helicopter type to be used.																																																																																																																					
11	45	<u>Note — Where obstacles are necessarily located on the structure, a helideck may have a limited obstacle sector (LOS).</u>																																																																																																																					
11	45	<u>Description. A complex surface originating at the reference point for the obstacle-free sector and extending over the arc not covered by the obstacle-free sector within which the height of obstacles above the level of the TLOF will be prescribed.</u>																																																																																																																					
11	45	<u>Characteristics. A limited obstacle sector shall not subtend an arc greater than 150 degrees. Its dimensions and location shall be as indicated in Figure 4-3 for a 1 D FATO with coincidental TLOF and Figure 4-4 for a 0.83 D TLOF.</u>																																																																																																																					
11	45	<table><tr><td colspan="4">Table 2. Dimensions and slopes of obstacle limitation surfaces for all visual FATOs (icao Annex 14, Vol.II, Table 4-1)</td></tr><tr><td rowspan="2">SURFACE and DIMENSIONS</td><td colspan="3">SLOPE DESIGN CATEGORIES</td><td rowspan="2">C</td></tr><tr><td>A</td><td>B</td><td></td></tr><tr><td colspan="5">APPROACH and TAKE-OFF CLIMB SURFACE:</td></tr><tr><td>Length of inner edge</td><td>Width of safety area</td><td>Width of safety area</td><td>Width of safety area</td><td></td></tr><tr><td>Location of inner edge</td><td>Safety area boundary (Clearway boundary if provided)</td><td>Safety area boundary</td><td>Safety area boundary</td><td></td></tr><tr><td colspan="5">Divergence: (1st and 2nd section)</td></tr><tr><td>Day use only</td><td>10%</td><td>10%</td><td></td><td>10%</td></tr><tr><td>Night use</td><td>15%</td><td>15%</td><td></td><td>15%</td></tr><tr><td colspan="5">First Section:</td></tr><tr><td>Length</td><td>3 386 m</td><td>245 m</td><td></td><td>1 220 m</td></tr><tr><td>Slope</td><td>4.5% (1:22.2)</td><td>8% (1:12.5)</td><td></td><td>12.5% (1:8)</td></tr><tr><td>Outer Width</td><td>(b)</td><td>N/A</td><td></td><td>(b)</td></tr><tr><td colspan="5">Second Section:</td></tr><tr><td>Length</td><td>N/A</td><td>830 m</td><td></td><td>N/A</td></tr><tr><td>Slope</td><td>N/A</td><td>16% (1:6.25)</td><td></td><td>N/A</td></tr><tr><td>Outer Width</td><td>N/A</td><td>(b)</td><td></td><td>N/A</td></tr><tr><td>Total Length from inner edge (a)</td><td>3 386 m</td><td>1 075 m</td><td></td><td>1 220 m</td></tr><tr><td colspan="5">Transitional Surface: (FATOs with a PinS approach procedure with a VSS)</td></tr><tr><td>Slope</td><td>50% (1:2)</td><td>50% (1:2)</td><td></td><td>50% (1:2)</td></tr><tr><td>Height</td><td>45 m</td><td>45 m</td><td></td><td>45 m</td></tr><tr><td colspan="5">(a) The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes, brings the helicopter to 152 m (500 ft) above FATO elevation.</td></tr><tr><td colspan="5">(b) Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations.</td></tr><tr><td colspan="5">Note — The slope design categories in Table 2 may not be restricted to a specific performance class of operation and may be applicable to more than one performance class of operation. The slope design categories depicted in Table 2 represent minimum design slope angles and not operational slopes.</td></tr></table>	Table 2. Dimensions and slopes of obstacle limitation surfaces for all visual FATOs (icao Annex 14, Vol.II, Table 4-1)				SURFACE and DIMENSIONS	SLOPE DESIGN CATEGORIES			C	A	B		APPROACH and TAKE-OFF CLIMB SURFACE:					Length of inner edge	Width of safety area	Width of safety area	Width of safety area		Location of inner edge	Safety area boundary (Clearway boundary if provided)	Safety area boundary	Safety area boundary		Divergence: (1st and 2nd section)					Day use only	10%	10%		10%	Night use	15%	15%		15%	First Section:					Length	3 386 m	245 m		1 220 m	Slope	4.5% (1:22.2)	8% (1:12.5)		12.5% (1:8)	Outer Width	(b)	N/A		(b)	Second Section:					Length	N/A	830 m		N/A	Slope	N/A	16% (1:6.25)		N/A	Outer Width	N/A	(b)		N/A	Total Length from inner edge (a)	3 386 m	1 075 m		1 220 m	Transitional Surface: (FATOs with a PinS approach procedure with a VSS)					Slope	50% (1:2)	50% (1:2)		50% (1:2)	Height	45 m	45 m		45 m	(a) The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes, brings the helicopter to 152 m (500 ft) above FATO elevation.					(b) Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations.					Note — The slope design categories in Table 2 may not be restricted to a specific performance class of operation and may be applicable to more than one performance class of operation. The slope design categories depicted in Table 2 represent minimum design slope angles and not operational slopes.				
Table 2. Dimensions and slopes of obstacle limitation surfaces for all visual FATOs (icao Annex 14, Vol.II, Table 4-1)																																																																																																																							
SURFACE and DIMENSIONS	SLOPE DESIGN CATEGORIES			C																																																																																																																			
	A	B																																																																																																																					
APPROACH and TAKE-OFF CLIMB SURFACE:																																																																																																																							
Length of inner edge	Width of safety area	Width of safety area	Width of safety area																																																																																																																				
Location of inner edge	Safety area boundary (Clearway boundary if provided)	Safety area boundary	Safety area boundary																																																																																																																				
Divergence: (1st and 2nd section)																																																																																																																							
Day use only	10%	10%		10%																																																																																																																			
Night use	15%	15%		15%																																																																																																																			
First Section:																																																																																																																							
Length	3 386 m	245 m		1 220 m																																																																																																																			
Slope	4.5% (1:22.2)	8% (1:12.5)		12.5% (1:8)																																																																																																																			
Outer Width	(b)	N/A		(b)																																																																																																																			
Second Section:																																																																																																																							
Length	N/A	830 m		N/A																																																																																																																			
Slope	N/A	16% (1:6.25)		N/A																																																																																																																			
Outer Width	N/A	(b)		N/A																																																																																																																			
Total Length from inner edge (a)	3 386 m	1 075 m		1 220 m																																																																																																																			
Transitional Surface: (FATOs with a PinS approach procedure with a VSS)																																																																																																																							
Slope	50% (1:2)	50% (1:2)		50% (1:2)																																																																																																																			
Height	45 m	45 m		45 m																																																																																																																			
(a) The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes, brings the helicopter to 152 m (500 ft) above FATO elevation.																																																																																																																							
(b) Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations.																																																																																																																							
Note — The slope design categories in Table 2 may not be restricted to a specific performance class of operation and may be applicable to more than one performance class of operation. The slope design categories depicted in Table 2 represent minimum design slope angles and not operational slopes.																																																																																																																							

#	Page	Amendments
		Slope category "A" generally corresponds with helicopters operated in performance class 1; slope category "B" generally corresponds with helicopters operated in performance class 3; and slope category "C" generally corresponds with helicopters operated in performance class 2. Consultation with helicopter operators will help to determine the appropriate slope category to apply according to the heliport environment and the most critical helicopter type for which the heliport is intended.
11	45	Any variation in the direction of the centre line of an approach surface shall be designed so as not to necessitate a turn radius less than 270 m. Note — For heliports intended to be used by helicopters operated in performance class 2 and 3, it is good practice for the approach paths to be selected so as to permit safe forced landing or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimised. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.
12	45	Note — For a FATO at a heliport without a PinS approach incorporating a visual segment surface (VSS) there is no requirement to provide transitional surfaces. Description: A complex surface along the side of the safety area and part of the side of the approach/take-off climb surface, that slopes upwards and outwards to a predetermined height of 45 m (150 ft).
12	45	Characteristics: The limits of a transitional surface shall comprise: a lower edge beginning at a point on the side of the approach/take-off climb surface at a specified height above the lower edge extending down the side of the approach/take-off climb surface to the inner edge of the approach/take-off climb surface and from there along the length of the side of the safety area parallel to the centre line of the FATO; and an upper edge located at a specified height above the lower edge as set out in Table 2. The elevation of a point on the lower edge shall be: along the side of the approach/take-off climb surface — equal to the elevation of the approach/take-off climb surface at that point; and along the safety area — equal to the elevation of the inner edge of the approach/take-off climb surface. Note 1 — If the origin of the inclined plane of the approach/take-off climb surface is raised as approved by an appropriate authority, the elevation of the origin of the transitional surface will be raised accordingly. Note 2 — As a result of b) the transitional surface along the safety area will be curved if the profile of the FATO is curved, or a plane if the profile is a straight line. The slope of the transitional surface shall be measured in a vertical plane at right angles to the centre line of the FATO. Take-off climb surface Description: An inclined plane, a combination of planes or, when a turn is involved, a complex surface sloping upwards from the end of the safety area and centred on a line passing through the centre of the FATO. Note — See Figures 8, 9, 10 & 11 for depiction of surfaces. See Table 2 for dimensions and slopes of surfaces.
12	45	Characteristics: The limits of a take-off climb surface shall comprise: an inner edge horizontal and equal in length to the minimum specified width/diameter of the FATO plus the safety area, perpendicular to the centre line of the take-off climb surface and located at the outer edge of the safety area; two side edges originating at the ends of the inner edge and diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and an outer edge horizontal and perpendicular to the centre line of the take-off climb surface and at a specified height of 152 m (500 ft) above the elevation of the FATO. The elevation of the inner edge shall be the elevation of the FATO at the point on the inner edge that is intersected by the centre line of the take-off climb surface. For heliports intended to be used by helicopters operated in performance class 1 and when approved by an appropriate authority, the origin of the inclined plane may be raised directly above the FATO. Where a clearway is provided the elevation of the inner edge of the take-off climb surface shall be located at the outer edge of the clearway at the highest point on the ground based on the centre line of the clearway.

#	Page	Amendments
		In the case of a straight take-off climb surface, the slope shall be measured in the vertical plane containing the centre line of the surface.
12	45	In the case of a take-off climb surface involving a turn, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight take-off climb surface. Note — See Figure 12. In the case of a take-off climb surface involving a turn, the surface shall not contain more than one curved portion. Where a curved portion of a take-off climb surface is provided the sum of the radius of arc defining the centre line of the take-off climb surface and the length of the straight portion originating at the inner edge shall not be less than 575 m. Any variation in the direction of the centre line of a take-off climb surface shall be designed so as not to necessitate a turn of radius less than 270 m. Note 1 — Helicopter take-off performance is reduced in a curve and as such a straight portion along the take-off climb surface prior to the start of the curve allows for acceleration.
12	46	Note 2 — For heliports intended to be used by helicopters operated in performance class 2 and 3 it is good practice for the departure paths to be selected so as to permit safe forced landings or one-engine inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimised. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.
12	46	Description: A complex surface originating at and extending from, a reference point on the edge of the FATO of a helideck. In the case of a TLOF of less than 1 D, the reference point shall be located not less than 0.5 D from the centre of the TLOF. Characteristics: An obstacle-free sector/surface shall subtend an arc of specified angle. A helideck obstacle-free sector shall comprise of two components, one above and one below helideck level: Note — See Figure 14. Above helideck level: The surface shall be a horizontal plane level with the elevation of the helideck surface that subtends an arc of at least 210 degrees with the apex located on the periphery of the D circle extending outwards to a distance that will allow for an unobstructed departure path appropriate to the helicopter the helideck is intended to serve. Below helideck level: Within the (minimum) 210-degree arc, the surface shall additionally extend downward from the edge of the FATO below the elevation of the helideck to water level for an arc of not less than 180 degrees that passes through the centre of the FATO and outwards to a distance that will allow for safe clearance from the obstacles below the helideck in the event of an engine failure for the type of helicopter the helideck is intended to serve.
12	47	Note 3.— Guidance on obstacle protection surfaces, or operational limitations, when temporary obstacles are present, is given in the Heliport Manual (Doc 9261).
12	47	Onshore heliportsSurface-level heliports 4.2.1. The following obstacle limitation surfaces shall be established for a FATO at heliports with a PinS approach or departure procedure with a proceed visually instructionutilizing a visual segment surface:
12	47	Note 1 — See Figure 10.
12	47	Note 2 — ICAO Procedures for Air Navigation Services — Aircraft Operations, (PANS-OPS, Doc 8168), Volume II, Part IV — Helicopters, details procedure design criteria.
13	47	The following obstacle limitation surfaces shall be established for a FATO at heliports, other than specified in 4.2.1, including heliports with a PinS approach or departure procedure without a proceed visually instruction where a visual segment surface is not provided:
13	47	The slopes of the obstacle limitation surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 2 4-1 and shall be located as shown in Figures 8, 9 and 13.
13	47	Except For for heliports facilitating performance class 1 operations , that have an approach/take-off climb surface with a 4.5 per cent slope design, objects shall be permitted to penetrate the obstacle limitation surface, if the results of an aeronautical study approved by an appropriate authority have reviewed the associated risks and mitigation measures.

#	Page	Amendments
13	47	New objects or extensions of existing objects shall not be permitted above any of the surfaces in 4.2.1 and 4.2.2 except when shielded by an existing immovable object. or after an aeronautical study approved by an appropriate authority determines that the object will not adversely affect the safety or significantly affect the regularity of operations of helicopters.
13	47	Existing objects above any of the surfaces in 4.2.1 and 4.2.2 should, as far as practicable, be removed except when the object is shielded by an existing immovable object. or after an aeronautical study approved by an appropriate authority determines that the object will not adversely affect the safety or significantly affect the regularity of operations of helicopters.
13	47	Note — The application of curved approach or take-off climb surfaces <u>and/or the utilization of vertical procedures</u> as specified in 4.1.5 or 4.1.18 may alleviate the problems created by objects infringing these surfaces.
13	48	A surface-level heliport should <u>shall</u> have at least two <u>one</u> approach and take-off climb surface <u>surfaces</u> . separated by not less than 135°. -An aeronautical study shall be undertaken by an appropriate authority when only a single approach and take-off climb surface is provided considering as a minimum, the following factors: the area/terrain over which the flight is being conducted; the obstacle environment surrounding the heliport and the availability of at least one protected side slope; the performance and operating limitations of helicopters intending to use the heliport; and the local meteorological conditions including the prevailing winds. <u>Note.— See the Heliport Manual (Doc 9261) for guidance.</u>
13	48	<u>Table 4-1. Approach and take-off climb slope design categories</u>
13	48	[TABLE] <u>Surface and dimensions</u> <u>Slope design categories</u> <u>A</u> <u>B</u> <u>C</u> <u>Approach and take-off climb surface:</u> <u>Length of inner edge</u> <u>Location of inner edge</u> <u>Width of safety area</u> <u>Safety area boundary (Helicopter clearway boundary if provided)</u> <u>Width of safety area</u> <u>Safety area boundary</u> <u>Width of safety area</u> <u>Safety area boundary</u> <u>Divergence: (1st and 2nd section)</u> <u>Day use only</u> <u>Night use</u> <u>10%</u> <u>15%</u> <u>10%</u> <u>15%</u> <u>10%</u> <u>15%</u> <u>First section:</u> <u>Length</u> <u>Slope</u> <u>Outer width</u> <u>3386 m</u> <u>4.5%</u> <u>(1:22.2)</u> <u>(b)</u> <u>245 m</u> <u>8%</u> <u>(1:12.5)</u> <u>N/A</u> <u>1220 m</u> <u>12.5%</u>

#	Page	Amendments
		(1:8) (b) Second section: Length Slope Outer width N/A N/A (b) 830 m 16% (1:6.25) N/A N/A N/A (b) Total length from inner edge (a) 3386 mc 1075 mc 1220 mc Transitional surface: Slope Height 50% (1:2) 45 md 50% (1:2) 45 md 50% (1:2) 45 md a. The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes brings the helicopter to 152 m (500 ft) above FATO elevation. b. Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations. c. This length may be reduced if vertical procedures are in place or extended/reduced if the approach or take-off climb surface is extended/reduced to meet the OCS of the PinS approach or departure procedure. d. See 4.1.9 b). Note.— Guidance on the application of slope categories is provided in the Heliport Manual (Doc 9261).
13	49	2 A helideck shall have an obstacle-free sector.
14	49	Note — A helideck may have a LOS (see 4.1.2 3 ⁶).
14	49	3 There shall be no fixed obstacles within the obstacle-free sector above the obstacle-free surface.
14	49	In the immediate vicinity of the helideck, obstacle protection for helicopters shall be provided below the helideck level. This protection shall extend over an arc of at least 180 degrees with the origin at the centre of the FATO, with a descending gradient having a ratio of one unit horizontally to five units vertically from the edges of the FATO within the 180-degree sector. This descending gradient may be reduced to a ratio of one unit horizontally to three units vertically within the 180-degree sector for multi-engine helicopters operated in performance class 1 or 2. (See Figure 4-213 .)
14	50	For a TLOF of 1 D and larger, within the 150-degree limited obstacle surface/sector out to a distance of 0.12 D measured from the point of origin of the limited obstacle sector, objects shall not exceed a height of 25 cm above the TLOF. Beyond that arc, out to an overall distance of a further 0.21 D measured from the end of the first sector, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-314 .)
14	50	Note — Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4-314 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in ICAO Heliport Manual (Doc 9261).

#	Page	Amendments
14	50	For a TLOF less than 1 D within the 150-degree limited obstacle surface/sector out to a distance of 0.62 D and commencing from a distance 0.5 D, both measured from the centre of the TLOF, objects shall not exceed a height of 5 cm above the TLOF. Beyond that arc, out to an overall distance of 0.83 D from the centre of the TLOF, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-415 .)
14	50	Note — Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4- 49 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in the ICAO Heliport Manual (Doc 9261).
14	50	The specifications in 4.2. 1620 and 4.2. 1822 shall be applicable for shipboard heliports completed on or after 1 January 2012.
14	51	0 Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.
14	51	1 To provide further protection from obstacles fore and aft of the TLOF, rising surfaces with gradients of one unit vertically to five units horizontally shall extend from the entire length of the edges of the two 150-degree sectors. These surfaces shall extend for a horizontal distance equal to at least 1 D of the largest helicopter the TLOF is intended to serve and shall not be penetrated by any obstacle. (See Figure 4-516 .)
15	51	2 No objects shall be located within the TLOF except those aids essential for the safe operation of a helicopter (such as nets or lighting) and then only up to a maximum height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.
15	51	From the fore and aft mid-points of the D circle in two segments outside the circle, limited obstacle areas shall extend to the ship's rail to a fore and aft distance of 1.5 times the fore-to-aft-dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within these areas there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF. (See Figure 17.) Such objects shall only be present if they do not represent a hazard to helicopters.
15	51	A limited obstacle sector horizontal surface shall be provided, at least 0.25 D beyond the diameter of the D circle, which shall surround the inboard sides of the TLOF to the fore and aft mid-points of the D circle. The limited obstacle sector shall continue to the ship's rail to a fore and aft distance of 2.0 times the fore-to-aft dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within this sector there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF.
15	51	<u>Note — Any objects located within the areas described in 4.2.19 and 4.2.20 that exceed the height of the TLOF are notified to the helicopter operator using a ship's helicopter landing area plan. For notification purposes it may be necessary to consider immovable objects beyond the limit of the surface prescribed in 4.2.19 particularly if objects are significantly higher than 25 cm and in close proximity to the boundary of the LOS. See ICAO Heliport Manual (Doc 9261) for guidance.</u>
15	51	Winching areas
15	51	<u>An area designated for winching on-board ships shall be comprised of a circular clear zone of diameter 5 m and extending from the perimeter of the clear zone, a concentric manoeuvring zone of diameter 2 D. (See Figure 4-7.)</u>
15	51	<u>The manoeuvring zone shall be comprised of two areas:</u>
15	51	<u>the inner manoeuvring zone extending from the perimeter of the clear zone and of a circle of diameter not less than 1.5 D; and</u>
15	52	<u>the outer manoeuvring zone extending from the perimeter of the inner manoeuvring zone and of a circle of diameter not less than 2 D.</u>
15	52	<u>Within the clear zone of a designated winching area, no objects shall be located above the level of its surface.</u>
16	52	<u>Objects located within the inner manoeuvring zone of a designated winching area shall not exceed a height of 3 m.</u>
16	52	<u>Objects located within the outer manoeuvring zone of a designated winching area shall not exceed a height of 6 m.</u>

#	Page	Amendments
16	52	<u>Note.— See the Heliport Manual (Doc 9261) for guidance.</u> 6 m.
16	53	<u>Figure 4-2. Helideck obstacle-free sector</u>
16	54	<u>Figure 4-3. Helideck obstacle limitation sectors and surfaces</u>
16	54	<u>for a FATO and coincidental TLOF of 1 D and larger</u>
16	55	<u>Figure 4-4. Helideck obstacle limitation sectors</u>
16	55	<u>and surfaces for a TLOF of 0.83 D and larger</u>
16	56	<u>Figure 4-5. Amidship's location — shipboard heliport obstacle limitation surfaces</u>
16	57	<u>Figure 4-6. Ships-side non-purpose-built heliport</u>
17	57	<u>obstacle limitation sectors and surfaces</u>
17	58	<u>Figure 4-7. Winching area of a ship</u>
17	60	FIGURE 17. SHIPS-SIDE NON-PURPOSE-BUILT HELIPORT OBSTACLE LIMITATION SECTORS AND SURFACES
17	60	An area designated for winching on-board ships shall be comprised of a circular clear zone of diameter 5 m and
17	60	The manoeuvring zone shall be comprised of two areas: a) the inner manoeuvring zone extending from the perimeter of the clear zone and of a circle of diameter not less than
17	60	
17	60	
17	80	A helicopter air taxi-route centre line marking or flush in-ground centre line markers shall be located along the centre line of the helicopter air taxi- route . <u>way</u> .
17	80	A helicopter air taxi-route centre line, when on an unpaved surface that will not accommodate painted markings, shall be marked with flush in-ground 15 cm wide and approximately 1.5 m in length yellow markers, spaced at intervals of not more than 30 m on straight sections and not more than 15 m on curves, with a minimum of four equally spaced markers per section.
17	80	<u>Note.— Further guidance on the characteristics of markers is provided in the Heliport Manual (Doc 9261).</u>
18	84	Note 6.— In cases where operations into a heliport are to be conducted at night with Night Vision Imaging Systems (NVIS), it is important to <u>ensure</u> establish the compatibility of the NVIS system with all heliport lighting <u>are compatible with the NVIS such as</u> through <u>the addition of infrared emitters to the heliport lighting</u> . Where such additional measures are not practicable, helicopter operators using NVIS are to be <u>made aware of it</u> . an assessment by the helicopter operator prior to use.
18	84	<u>Note.— The objective of a heliport beacon is to make a heliport more conspicuous to assist the pilot to locate and identify the heliport at night and/or by day in reduced visibility.</u>
18	84	The heliport beacon shall emit repeated series of equispaced short duration white flashes in the format in Figure 5-11 <u>28</u> .
18	85	<u>Figure 5-11. Heliport beacon flash characteristics</u>
18	85	The effective light intensity distribution of each flash should be as shown in Figure 5- 12 <u>11</u> , Illustration 1.
18	87	Approach lighting system z
18	87	<u>Note.— The objective of an approach lighting system is to allow the helicopter operator, by day and night, to visually identify the heliport and align the helicopter on the centreline of the FATO upon arriving at a prescribed point on the approach flight path.</u>
18	87	<u>Application</u>

#	Page	Amendments
18	88	Figure 5-12. Isocandela diagrams
18	89	Figure 5-13. Approach lighting system
19	89	The flashing lights should have a flash frequency of one per second and their light distribution should be as shown in Figure 5-1229 , Illustration 3. The flash sequence should commence from the outermost light and progress towards the crossbar.
19	89	3.4. Flight path alignment guidance lighting system
19	89	Note.— The objective of a flight path alignment guidance lighting system is to indicate, by day, night, and in reduced visibility, available approach and/or departure flight path direction(s).
19	89	A flight path alignment guidance lighting system should consist of a row of three or more lights spaced uniformly a total minimum distance of 6 m. Intervals between lights should not be less than 1.5 m and should not exceed 3 m. Where space permits there should be 5 lights. (See Figure 5-1027 .)
19	89	Note — The number of lights and spacing between these lights may be adjusted to reflect the space available. If more than one flight path alignment system is used to indicate available approach and/or departure path direction(s), the characteristics for each system are typically kept the same. (See Figure 5-1027 .)
19	89	The distribution of the lights should be as indicated in Figure 5-1229 , Illustration 56 .
19	91	Final approach and take-off area perimeter lights lighting systems for surface-level heliports
19	91	Note.— The objective of a final approach and take-off area perimeter lights lighting system for onshore surface-level heliports is to provide to the pilot operating at night an indication of the shape, location and extent of the FATO.
19	91	Where a FATO is with a solid surface established at a surface-level heliport intended for use at night, FATO perimeter lights shall be provided except that they may be omitted where the FATO and the TLOF are nearly coincidental or the extent of the FATO is self-evident.
19	91	FATO perimeter lights shall be placed along the edges of the FATO. The lights shall be uniformly spaced as follows:
20	91	FATO perimeter lights shall be fixed omnidirectional lights showing green or white with variable intensity . Green perimeter lights shall be permitted only when the FATO is a dynamic load-bearing surface. Where the intensity of the lights is to be varied the lights shall show variable white.
20	92	Note.— Further guidance on colour selection of FATO perimeter lights is provided in the Heliport Manual (Doc 9261).
20	92	The light distribution of FATO perimeter lights should be as shown in Figure 5-1221 , Illustration 4.
20	92	Aiming point lights shall form a pattern of at least six omnidirectional white lights as shown in Figure 5-724 . The lights shall be arranged equidistantly with a light at the apex and at both corners. The lights shall be inset when a light extending above the surface could endanger helicopter operations.
20	92	The light distribution of aiming point lights should be as shown in Figure 5-124 , Illustration 4.
20	92	Note.— Where a TLOF is located in a stand, the objective may be met with the use of ambient lighting or stand floodlighting. (see 5.3.10).
20	92	For a surface-level heliport, lighting for the TLOF in a FATO shall consist of one or more either of the following:
20	92	perimeter lights; or
20	93	floodlighting; arrays of segmented point source lighting (ASPSL) or luminescent panel (LP) lighting to identify the TLOF perimeter when a) and b) are is not practicable and FATO perimeter lights are available.
20	93	ASPSL and/or LPs to identify the TDPM TDPC and/or floodlighting to illuminate the TLOF.
21	93	Note — Guidance on suitable systems is contained in the Heliport Manual (Doc 9261). At elevated heliports, shipboard heliports and helidecks, surface texture cues within the TLOF are essential for

#	Page	Amendments
		helicopter positioning during the final approach and landing. Such cues can be provided using various forms of lighting (ASPSL, LP, floodlights or a combination of these lights, etc.) in addition to perimeter lights. Best results have been demonstrated by the combination of perimeter lights and ASPSL in the form of encapsulated strips of light emitting diodes (LEDs) and inset lights to identify the TDPM and heliport identification markings.
21	93	When enhanced surface texture cues are required at a TLOF ASPSL and/or LPs to identify the TDPM <u>TDPC</u> and/ or floodlighting should be provided at a surface-level heliport intended for use at night when enhanced surface texture cues are required.
21	93	TLOF perimeter lights shall be placed along the edge of the area designated for use as the TLOF or within a distance of 1.5 m from the <u>outer</u> edge. <u>TLOF perimeter lights shall be uniformly spaced at intervals of not more than 3 m for elevated heliports, helidecks and shipboard heliports and not more than 5 m for surface-level heliports. Where the TLOF is a circle the lights shall be:</u> located on straight lines in a pattern which will provide information to pilots on drift displacement; and
21	93	5.3.9.6—TLOF perimeter lights shall be uniformly spaced at intervals of not more than 3 m for elevated heliports and helidecks and not more than 5 m for surface-level heliports. There shall be a minimum number of four lights on each side including a light at each corner. For a circular TLOF, where lights are installed in accordance with 5.3.9.5 b) there shall be a minimum of fourteen lights. Note — <u>Where the TLOF is circular, drift of the helicopter may be difficult to discern by the pilot.</u> Guidance on <u>lighting patterns to counter drift displacement over the TLOF</u> this issue is contained in ICAO Heliport Manual (Doc 9261).
21	93	7 The TLOF perimeter lights shall be installed at an elevated heliport or fixed helideck such that the pattern cannot be seen by the pilot from below the elevation of the TLOF.
21	93	8 The TLOF perimeter lights shall be installed on a moving helideck or shipboard heliport, such that the pattern cannot be seen by the pilot from below the elevation of the TLOF when the helideck or shipboard heliport is level.
21	93	9 On surface-level heliports, ASPSL or LPs, if provided to identify the TLOF, shall be placed along the marking designating the edge of the TLOF. Where the TLOF is a circle, they shall be located on straight lines circumscribing the area.
21	93	5.3.9.10—On surface-level heliports the minimum number of LPs on a TLOF shall be nine. The total length of LPs in a pattern shall not be less than 50 per cent of the length of the pattern. There shall be an odd number with a minimum number of three panels on each side of the TLOF including a panel at each corner. LPs shall be uniformly spaced with a distance between adjacent panel ends of not more than 5 m on each side of the TLOF. 5.3.9.11—When LPs are used on an elevated heliport or helideck to enhance surface texture cues, the panels should not be placed adjacent to the perimeter lights. They should be placed around a touchdown marking or coincident with heliport identification marking. 5.3.9.9.12 TLOF floodlights <u>where provided</u> shall be located <u>arranged</u> so as to avoid glare to pilots in flight or <u>and</u> to personnel working on the area. The arrangement and aiming of floodlights shall be such that shadows are kept to a minimum.
21	93	Note — <u>Detailed specifications on the number of lights to be provided, based on the shape and size of the TLOF are contained in the Heliport Manual (Doc 9261).</u> ASPSL and LPs used to designate the and/or heliport identification marking have been shown to provide enhanced surface texture cues when compared to low-level floodlights. Due to the risk of misalignment, if floodlights are used, there will be a need for them to be checked periodically to ensure they remain within the specifications contained within 5.3.9.
21	93	13 The TLOF perimeter lights shall be fixed omnidirectional lights showing green.
22	93	14 At a surface-level heliport, ASPSL or LPs shall emit green light when used to define the perimeter of the TLOF.
22	93	15 The chromaticity and luminance of colours of LPs should conform to ICAO Annex 14, Volume I, Appendix 1, 3.4.
22	93	16 An LP shall have a minimum width of 6 cm. The panel housing shall be the same colour as the marking it defines.

#	Page	Amendments
22	94	17 For a surface level or elevated heliport, the TLOF perimeter lights located in a FATO shall not exceed a height of 25 cm and should be inset when a light extending above the surface could endanger helicopter operations.
22	94	18 For a helideck or shipboard heliport, the TLOF perimeter lights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.
22	94	19 When located within the safety area of a surface level or elevated heliport, the TLOF floodlights should not exceed a height of 25 cm.
22	94	20 For a helideck or shipboard heliport, the TLOF floodlights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.
22	94	21 The <u>ASPSL and</u> LPs shall not extend above the surface by more than 2.5 cm.
22	94	<u>Note.— Guidance on panel profiles and loading limitations is contained in the Heliport Manual (Doc 9261).</u>
22	94	<u>19</u> The light distribution of the perimeter lights should be as shown in,
23	94	FIGURE5- 12 11 , Illustration 5.
23	94	<u>Note.— The light distribution of the ASPSL and/or LPs used to illuminate the TDPC and heliport identification marking, or cross (chevron) markings at a hospital, are detailed in the Heliport Manual (Doc 9261).</u> 5.3.9.23 — The light distribution of the LPs should be as shown in Figure 5-11, Illustration 6. 5.3.9. <u>20</u> 24 The spectral distribution of TLOF area floodlights shall be such that the surface and obstacle marking can be correctly identified.
23	94	5.3.9.25 The average horizontal illuminance of the floodlighting should be at least 10 lux, with a uniformity ratio (average to minimum) of not more than 8:1 measured on the surface of the TLOF. 5.3.9.26 Lighting used to identify the TDPC should comprise a segmented circle of omnidirectional ASPSL strips showing yellow. The segments should consist of ASPSL strips, and the total length of the ASPSL strips should not be less than 50 per cent of the circumference of the circle. 5.3.9. <u>21</u> 27 If utilised, the heliport identification marking lighting, <u>or cross marking lighting at a hospital,</u> should be omnidirectional showing green.
23	96	<u>Note.— The objective of obstacle floodlighting is to highlight the shape and location of obstacles in the vicinity of the heliport, to assist a pilot flying at night to avoid all obstacles by a safe margin.</u>